













NOVEMBER/DECEMBER 2006 - ISSUE 187



features

38

The Versatile SHOW Huntboard

This sideboard variation is just as comfortable in a hallway or a living room

BY GARRETT HACK

46 Waterborne Finishes Come of Age

The best are now as good as or better than solvent finishes; the worst should still be avoided

BY CHRIS A. MINICK

52 Fresh Take on Tabletops

With a center gap for expansion, the design options multiply

BY DOUG STOWE



84

CARVING
LETTERS



56 TEST

Dovetail Jigs

All can make precise joints—but the best do it easily

BY TIM ALBERS

64 9 Reasons to Own a Shoulder Plane

Fine-tune your joinery with these tips and techniques

BY CHRIS GOCHNOUR

70 A User's Guide to Featherboards

Extra hands make machine cuts safer, cleaner, and more accurate

BY ROLAND JOHNSON



74 A New Look at Eye Protection

Comfortable glasses, goggles, and face shields leave you no excuse

BY STEVE SCOTT

78 Stop Guessing at Wood Movement

Figure out exactly how much of a gap to leave in drawers and floating panels, no matter the wood or season

BY CHRISTIAN BECKSVOORT

84 The ABCs of Letter Carving

Create elegant characters using two chisels

BY T.J. MCDERMOTT

56 DOVETAIL

up front

6 On the Web

8 Contributors

10 Letters

16 Methods of Work

- Planer cabinet doubles as outfeed table
- Jig makes it easier to plane drawer sides

24 Tools & Materials

- Circular saw for woodworkers
- Nailer drives both 23-ga. brads and pins
- Fractional dial calipers

32 Fundamentals

Develop a game plan to make your work more efficient

in the back

88 Readers Gallery

94 Q & A

- Cutting mortises for bed-rail hardware
- Green wood and shop humidity
- MDF and your health

100 Wood Turning

Sharpening a gouge

106 Master Class

Make a Ruhlmann leg

120 Finish Line

The effects of light on dyes and stains



FineWoodworking.com

THIS MONTH ON FineWoodworking.com



Free online extras available October 12 at www.FineWoodworking.com/extras



VIDEOS

Letter Carving Basics

T.J. McDermott ("The ABCs of Letter Carving") demonstrates his technique for carving the letter R.

Sharpening a Shoulder Plane

Chris Gochnour ("Nine Reasons to Own a Shoulder Plane") shows how to tune up a shoulder plane before putting it to use.

Details of a Huntboard

Take a guided tour of Garrett Hack's versatile sideboard as it evolves from a work in progress to a finished piece.

TOOL REVIEW

Half-Blind Dovetail Jigs

Woodworker Fred Sotcher reviews five single-use router dovetail jigs and shows how to use one to build a drawer.



- **EXPERT FORUMS**
- **FURNITURE GALLERY**
- **WOODWORKING CLASSIFIEDS**



members only:

Become a member at www.FineWoodworking.com to access these highlights and our huge archive of articles and videos.



(III) AUDIO SLIDE SHOW

UNEARTHING YALE'S TREASURES

OCTOBER 16: Tune in for an audio tour of the Yale Furniture Study, a basement collection of more than 1,000 pieces of furniture and artifacts from early Chippendale to Sam Maloof.



VIDEOS

Veneer Patching and Joining

OCTOBER 23: Mario Rodriguez shares two techniques for seamless veneer patching and joining in this two-part video series.

A Simple Tapering Jig

NOVEMBER 6: Woodworking instructor Alan Turner builds and demonstrates a simple but effective tablesaw tapering jig.

plus:

- **CURRENT ISSUE ONLINE**
- ARCHIVES OF 1200+ ARTICLES, AND PROJECT PLANS
- **MORE THAN 200 SKILL-BUILDING VIDEOS**
- **NEW BLOG: Fine Woodworking Book Notes**









EDITOR Asa Christiana ART DIRECTOR Michael Pekovich

MANAGING EDITOR Mark Schofield MANAGING EDITOR, ONLINE Matt Berger

ASSOCIATE EDITORS

Thomas G. Begnal, Steve Scott, Thomas McKenna, David Heim

ASSISTANT EDITOR, ONLINE Gina Eide

COPY/PRODUCTION EDITORS Julie RisinIt, Elizabeth Healy

ASSOCIATE ART DIRECTORS

Keliy J. Dunton, Rodney Diaz SHOP MANAGER John White

ADMINISTRATIVE ASSISTANT Betsy Engel

CONTRIBUTING EDITORS

Christian Becksvoort, Gary Rogowski, Garrett Hack, Roland Johnson, William Duckworth, Lonnie Bird

CONSULTING EDITOR Chris A. Minick METHODS OF WORK Jim Richev

INDEXER Harriet Hodges

PUBLISHER Anatole Burkin ADMINISTRATIVE ASSISTANT Christina Glennon CIRCULATION DIRECTOR Dennis O'Brien SINGLE COPY SALES MANAGER Mark Stiekman

> ADVERTISING SALES MANAGER Peter Radeau

SENIOR NATIONAL ACCOUNT MANAGER Linda Abbett

NATIONAL ACCOUNT MANAGER John Lagan SENIOR AD SALES SUPPORT ASSOCIATE Marjorie Brown

WOODWORKING BOOKS & VIDEOS EXECUTIVE EDITOR Helen Albert

Fine Woodworking: (ISSN: 0361-3453) is published bimonthly, with a special seventh issue in the winter, by The Taunton Press, Inc., Newtown, CT 06470-5506. Telephone 203-426-8171. Periodicals postage paid at Newtown. CT 06470 and at additional mailing offices. GST paid registration #123210981.

Subscription Rates: U.S and Canada, \$34.95 for one year, \$59.95 for two years, \$83.95 for three years (in U.S. dollars, please), Canadian GST included, Outside U.S and Canada, \$41.95 for one year, \$73.95 for two years, \$104.95 for three years (in U.S. dollars, please). Single copy, \$7.99. Single copies outside the U.S. and

Postmaster: Send address changes to Fine Woodworking. The Taunton Press, Inc., 63 S. Main St., PO Box 5506, Newtown, CT 06470-5506.

Canada Post: Return undeliverable Canadian addresses to Fine Woodworking, c/o Worldwide Mailers, Inc., 2835 Kew Drive, Windsor, ON N8T 3B7, or email to mnfa@taunton.com.

Printed in the USA

HOW TO CONTACT US:

Fine Woodworking

The Taunton Press, 63 S. Main St., PO Box 5506, Newtown, CT 06470-5506 203-426-8171 www.FineWoodworking.com

To contribute an article, give a tip, or ask a question, contact Fine Woodworking at the address

Call: 800-309-8955 Fax: 203-270-6753 Fmail: fw@taunton.com

Customer Service:

For subscription inquiries, you can:

·Visit our subscriber service section at:

www.FineWoodworking.com

· Email us: fwservice@taunton.com

· Call our customer support center:

To report an address change, inquire about an order, or solve a problem, call:

800-477-8727

To subscribe, purchase back issues, books or videos, or give a gift, call:

800-888-8286

Advertising:

To find out about advertising:

Call: 800-309-8954 Email: fwads@taunton.com

Member Audit Bureau of Circulation



Retail:

If you'd like to carry Fine Woodworking in your store, call the Taunton Trade Company at:

866-505-4674

Mailing List:

Occasionally we make our subscribers' names and addresses available to responsible companies whose products or services we feel may be of some interest to you. Most of our subscribers find this to be a helpful way to learn about useful resources and services. If you don't want us to share your name with other companies, please contact our Customer Service Department at:

800-477-8727

The Taunton Guarantee:

If at any time you're not completely satisfied with Fine Woodworking, you can cancel your subscription and receive a full and immediate refund of the entire subscription price. No questions asked.

Copyright 2006 by The Taunton Press, Inc. No reproduction without permission of The Taunton Press, Inc.



READER SERVICE NO. 43



Low Prices • Fast Delivery FREE Shipping on Every Order

There has never been a better time to experience the made in USA quality of Whiteside and no better place to buy tooling from than Holbren.

Also Distributing:

LRH Enterprises

Ridge Carbide

· Forest City Tool



www.holbren.com • 800-838-3547 24/7

READER SERVICE NO. 145





contributors

Aaron Radelow (Master Class) has dedicated himself to becoming one of the most versatile furniture makers in America. For 15 years, he has been building reproductions as well as original designs in his native San Diego. His diverse portfolio includes everything from a Queen Anne dressing table to Byzantine hand-carved gates and Art Deco desks. Three years ago, Radelow was introduced to the world of French marquetry. He now spends many hours working on the "chevalet," or marquetry sawhorse, that he built. To see more of his work, visit his Web site: www.customwooddesigns.com.





T.J. McDermott ("The ABCs of Letter Carving") has two longstanding connections with Fine Woodworking. He studied boatbuilding with Robert Goodfellow, our art director for many years, and he's a longtime collaborator with contributing editor Christian Becksvoort. Early this year, they teamed up with Jennings Garnett, another Down East artisan, to open the 150 High Gallery in Portland, Maine.



Doug Stowe ("Fresh Take on Tabletops") has been a professional furniture designer and box-maker for 30 years. When he's not at work in his Eureka Springs, Ark., studio, he can be found at the town's Clear Spring Elementary School, where he oversees a six-year-old program to use the woodshop to augment instruction in math, environmental studies, and history.

FineWoodworking.com

For more information on our contributors, go to www.FineWoodworking .com/authors.

Until recently, Stewart Crick (Fundamentals) split his time between teaching management/organizational behavior and building furniture. Now he's turning his passion for Shaker and Arts and Crafts furniture into a full-time endeavor. If his shop is empty, you may find Crick at the minor-league ballpark near his Manassas, Va., home, cheering on the Potomac Nationals.



Anyone who has admired the illustrations in Fine Woodworking and other Taunton publications is familiar with the work of Vince Babak (Q&A, Master Class, "A User's Guide to Featherboards"). Babak, who calls himself an architect with a passion for technical illustrations, migrated east from Akron, Ohio, to attend architecture school at Cornell University. He started doing illustrations for us in 1982 and hasn't stopped since. Babak has an architecture and illustration business in Kensington, Conn.



INDEPENDENT PUBLISHERS SINCE 1975

TAUNTON, INC.

Founders, Paul and Jan Roman

THE TAUNTON PRESS

President & Editor In Chief Suzanne Roman

Executive Vice President &

Chief Financial Officer Timothy Rahr

Executive Vice President &

Publisher, Magazine Group Jon Miller

Publisher, Book Group James Childs

Chief of Operations Thomas Luxeder

DIRECTORS

Creative Director Susan Edelman

Human Resources Director Carol Marotti

Controller Wayne Reynolds

Advertising Director David Gray

Consumer Marketing Director Diana Allwein

Fulfillment Director Patricia Williamson

Financial Analysis Director Kathy Worth

THE TAUNTON PRESS

Books: Marketing: Melissa A. Possick, Meg Day, Audrey Locorotondo. Publicity: Nicole Radder, Janel Noblin. Editorial: Helen Albert, Kathryn Benoit, Peter Chapman, Steve Culpepper, Robyn Doyon-Aitken, Julie Hamilton, Pamela Hoenig, Carolyn Mandarano, Nicole Palmer, Jennifer Peters, Amy Reilly, Jennifer Russell, Erica Sanders-Foege, Kathleen Williams. Art: Chris Thompson, Alison Wilkes, Nancy Boudreau, Amy Griffin, Kathy Kelley, Sandra Mahlstedt, Wendi Mijal, Lynne Phillips, Carol Singer. Manufacturing: Thomas Greco, Laura Burrone.

Business Office: Holly Smith, Gayle Hammond, Patricia Marini. Legal: Carolyn Kovaleski. Magazine Print Production: Philip Van Kirk, Nicole Anastas, Jennifer

Circulation: Dennis O'Brien, Director; Andrew Corson, Keri DeGross, Catherine Hansen.

Distribution: Paul Seipold, Walter Aponte, Frank Busino, David DeToto, Leanne Furlong, Deborah Greene, Frank Melbourne, Reinaldo Moreno, Raymond Passaro, Ulysses Robinson, Alice Saxton, Nelson Wade.

Finance/Accounting: Finance: Brett Manning, David Pond. Accounting: Patrick Lamontagne, Lydia Krikorian, Judith O'Toole, Shannon Marrs, Elaine Yamin, Carol Diehm, Dorothy Blasko, Susan Burke, Lorraine Parsons, Larry Rice, James Tweedle, Priscilla Wakeman.

Fulfillment: Diane Goulart. Fulfillment Systems: Jodi Klein, Kim Eads, Nancy Knorr, Dawn Viglione. Customer Service: Ellen Grassi, Michelle Amoroso, Kathleen Baker, Bonnie Beardsley, Deborah Ciccio, Katherine Clarke, Alfred Dreher, Monica Duhancik, Eileen McNulty, Patricia Parks, Deana Parker, Patricia Pineau, Betty Stepney. Data Entry: Melissa Dugan, Anne Champlin, Mary Ann Colbert, Maureen Pekar, Debra Sennefelder, Andrea Shorrock, Marylou Thompson, Barbara Williams.

Human Resources: Linda Ballerini, Christine Lincoln, Dawn Usserv.

Information Technology Services: Applications

Development: Heidi Waldkirch, Frank Miller, Robert Nielsen, Linda Reddington, Lawrence Sullivan, John Vaccino, Daniel Woodhouse. Desktop and Network Support: Kenneth Jones, Petre Cotofana, Gabriel Dunn, Michael Lewis, Jay Ligouri.

Operations: Joseph Morits, Roberta Calabrese, Sally Cunningham, Kevin DeGroate, John Gedney, Marc Imbimbo, Jennifer Licursi, Susan Nerich, Jeannette Pascal. T Room: Michael Louchen, Geraldine Benno, Anna Pendergast, Anne Scheurer, Norma-Jean Taylor. Maintenance: Lincoln Peters.

Promotion: Michele Mayernik, Sandra Motyka, Nicole Pallatto, William Sims. *Promotion Print Production*: Diane Flanagan, John Cavallaro, Sandra Hannan, Kate Krentsa.

Taunton Creative and Editorial: Creative: Michael Amaditz, Sarah Opdahl, Pamela Winn. Editorial: Jefferson Kolle, Debra Silber. Photography: Scott Phillips. Video: Gary Junken. Prepress: Deborah Cooper, Richard Booth, William Bivona, David Blasko, Richard Correale, William Godfrey, Brian Leavitt, Chansam Thammavongsa. Advertising Production: Laura Bergeron, Lisa DeFeo, Tracy Goodpaster, Sreven Molnar, Patricia Petro, Kathryn Simonds, Martha Stammer.

TAUNTON DIRECT

Patrick Cozens, Donna Capalbo, Raphael Cardoso, Robert Harlow, Michele Ladyko, Kathleen McGreevy, Michael Valanzola.

TAUNTON INTERACTIVE

Jodie Delohery, Michelle Rutkowski, Robert Steigerwald, Stace Caseria, Christopher Casey, Mark Coleman, Jennifer Wheeler Conlon. Trish Dardine, Ruth Dobsevage, Geoff Krajeski, Victoria North, Howard Runyon.

TAUNTON TRADE

Kevin Hamric, Director; John Bacigalupi, Brett DeMello, Allison Hollett, Elizabeth Quintiliano, Rebecca Shafton. Single Copy Sales: Mark Stiekman, Valerie Droukas.

TAUNTON MAGAZINES

Fine Woodworking • Fine Homebuilding Threads • Fine Gardening • Fine Cooking

Our magazines are for people who are passionate about their pursuits. Written by practicing experts in the field, Taunton Press magazines provide authentic, reliable information supported by instructive and inspiring visuals.

TAUNTON BOOKS

Our books are filled with in-depth information and creative ideas from the finest authors in their fields. Whether you're practicing a craft or engaged in the creation of your home, Taunton books will inspire you to discover new levels of accomplishment.

WWW.TAUNTON.COM

Our website is a place where you can discover more about the interests you enjoy, converse with fellow enthusiasts, shop at our convenient on-line store or contact customer service.

EMPLOYMENT INFORMATION

To inquire about career opportunities, please e-mail us at tauntonjobs@taunton.com or visit our website www.taunton.com. You may also write to The Taunton Press, Human Resources, 63 S. Main St., Box 5506, Newtown, CT 06470.

CUSTOMER SERVICE

We are here to answer any questions you might have and to help you order our magazines, books and videos. Just call us toll-free at 800-477-8727.

The Taunton Press, Inc., Taunton Direct, Inc., Taunton Trade, Inc., and Taunton Interactive, Inc., are all subsidiaries of Taunton, Inc.





READER SERVICE NO. 144

READER SERVICE NO. 108

THE SOURCE FOR BANDSAW ACCESSORIES

Iturra Design: New 2006 Catalog

Free Catalog



- Introducing the Quick Release by Carter Products
- Our new Blade Gage bandsaw blade tension meter.
- Lenox Pro Master carbide-tipped and Bimetal blades
- Bandrollers, rip and re-saw fences, improved tension springs, tires, table inserts, circle jigs, and much more.
- History and comparison between Delta and JET bandsaws.
 CALL 1-866-883-8064 or 1-904-371-3998

READER SERVICE NO. 14






www.trend-usa.com Tel: (270) 872 4674 Fax: (866) 204 5441

AD 06/19


Spotlight

ISSUE NO. 186 October 2006 p. 16

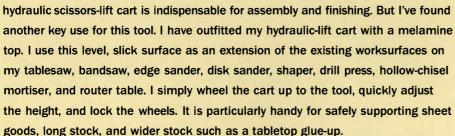

When selecting a scissors-lift table, it is important to consider your desired range of worksurface heights. I selected a "high lift" cart with a 770-lb. weight capacity (Harbor Freight Tools, \$290). This cart works with all of my machines--plus it is great for lifting heavy tools and furniture in and out of my pickup truck.

-MARK CLAYPOOL, Horseheads, N.Y.

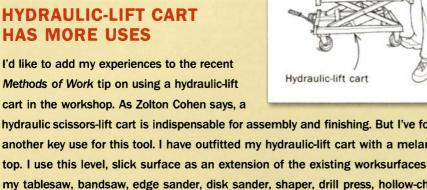

Auxiliary table

'Woodworking has given me my life back'

In 1994 I injured my back at work, and as a result I acquired a staph infection in the bone. I was left with a lot of metal and a pain pump to live with. At least I am alive and still mobile. At some point, my sister gave me a subscription to this magazine. In a desperate need to work and be needed, I discovered woodworking. It has given me my life back.

I am not an expert or a professional and never will be, but I do love what I do. I have been able to completely rebuild my wife's kitchen, among other projects.

-JACK TANNER, Nashville, Ark.

Manufacturer defends wooden spokeshave

As the manufacturer of the Kansas City Windsor spokeshave, I was surprised

by some of Chris Gochnour's comments in his recent article, "Choosing and Using Spokeshaves" (FWW #185). For experienced users, the jackscrew adjustment of shaves like ours is not problematic. Once set to the user's liking, typically a fine set, the blade is left where it is. If the user comes to a place where a lot of hogging is needed, he or she can quickly adjust for a deeper cut. Simply loosen one of the thumbnuts a tiny bit, and the blade will pull out into the work. When the temporary need is satisfied, the user can return to the regular position simply by retightening the nut.

Other users like to set one jackscrew a little higher than the other so that the thickness of the cut can be varied, a unique feature of wooden shaves.

This means that you can rough out and remove material extremely quickly and then reduce the cut to a final setting without stopping work. This is why some woodworkers prefer wooden shaves to their more modern metal cousins.

Another important advantage to the fixed adjustment of the jackscrew: Whenever the blade must be removed for sharpening and is returned to the stock, it goes right back to the same, favored position without need of readjustment.

- KEVIN T. BRENNAN, Kansas City Windsor Tool Works, Kansas City, Mo.

Chris Gochnour replies: Your suggestions on adjustment are well taken. I agree that a shave of this type, when properly set up, requires infrequent adjustment. That said, when you do need to make a fixed adjustment, the Windsor's concealed jackscrew design was not as convenient as some of the other modern, low-angle spokeshaves I reviewed.

Polyurethane glue dangerous to pets

Keep polyurethane glue, such as Gorilla Glue, well away from dogs. At our animal hospital, we have had three cases in the past year in which dogs have ingested this type of glue. The glue does not adhere to the tissue in the stomach, but it does expand, cure, and become rock hard. We

Associate Art Director

Fine Woodworking is looking for a graphic designer with three-plus years of magazine experience and knowledge of woodworking. Must have strong drawing skills and be proficient on the Mac (InDesign, Photoshop). Photographic abilities are a plus. Send letter and resume to: Human Resources, The Taunton Press Inc., 63 S. Main St., P.O. Box 5506, Newtown, CT 06470 (fax: 203-426-3503), or email tauntonjobs@taunton.com.

Hardwood from Germany.

European beech for a modern lifestyle



Beech - the new material for interior decorating, whether contemporary or eclectic in design. It's a light versatile wood. From sustainably managed European forests. Get acquainted with its outstanding properties: easy to process, extremely durable, and featuring a smooth surface suitable for your choice of staining.

Your gateway to suppliers of quality products:

www.germantimber.com



removed a volleyball-sized ball of polyurethane glue from a Rottweiler. We have never had a case of a dog eating any other type of glue.

-ANDREW TAYLOR, Bolton Veterinary Hospital, Bolton, Conn.

Editor replies: Peter Ragland, president of The Gorilla Glue Company, echoed Mr. Taylor's caution and pointed out that the Gorilla Glue label warns users to keep the stuff away from children and pets for the reasons Mr. Taylor states.

Great job for Woodcraft roller stand



I have had the
Woodcraft roller
stand for about a
year, and I disagree
with your recent
review (Tools and
Materials, FWW
#186). I use the stand as

outfeed support for my tablesaw. Yes, the four legs are adjusted one at a time, but

I've only needed to adjust the stand once to saw-table height. After that, the eight rollers are always level. The weight of the stand plus its four locking casters give it better stability than my individual roller stands. And I like the ability to expand the stand when I need it and contract it when I don't.

-STAN LEVINE, Rolling Hills, Calif.

Was Festool sander tested properly?

I read the recent tool test of randomorbit sanders (*FWW* #185). I have some questions about the Festool product test. In the article the author, Andy Engel, says he used Norton 3X abrasives to perform the tests on all of the sanders. To my knowledge, Norton does not make a paper that is compatible with the Festool sanders, which require a center hole in the paper to mate with a hole on the pad. This center hole is critical in the performance of the sander, and in dust extraction. How did the author use Norton 3X paper on the Festool sander? The article also states there is an eight-hole pad available for the Festool sander, and that the test was run using both the Festool nine-hole pad (with center hole) and the eight-hole pad. Festool does not offer an eight-hole pad for their sander. Where did the author obtain that pad? And again, without the center hole, wasn't the performance of the Festool sander seriously impacted?

-DAVID W. FALKENSTEIN, Cave Creek, Ariz.

Andy Engel replies: We wanted to use the same sandpaper for all of the sanders, to level the playing field, so the Festool's nine-hole design definitely complicated the testing. I spoke with Festool regarding the issue, and they sent out an eight-hole pad that I believe was intended for an earlier model. I tested the Festool sander using both the eight-hole pad and Norton 3X disks, and the nine-hole pad fitted with Festool's proprietary disks. The results didn't differ enough to justify separate reporting.







READER SERVICE NO. 173



Laguna Guides



The LAGUNA GUIDE features "Space Age" ceramic guide blocks (patent pending) as both side and thrust support. This enables the ceramic piece to gently touch the side of the blade, on all three sides without heat build-up, therefore giving stability, which has never been achieved before.

Resaw King

It has been said that we invented the Resaw King blade because nobody likes to sand, but the truth is that while it cuts down on wood waste and sanding, the Resaw King can be resharpened to keep your cuts flawless. Available in ANY length to suit your bandsaw. Call today and find out why we believe our Resaw King Blade is simply the best!


LAGUVA TOOLS



Gluing up a case takes patience. Finding the article that shows how, shouldn't.

The Best of Fine Woodworking DVD, 2nd Edition contains nearly double the content of our previous CD version. Slip it into your computer for easy access to 30 years of timeless information, shoptested techniques, and expert know-how.

It's your most authoritative resource and the easiest way to locate the back-issue articles you want *when* you need them. In under a minute, you can compare techniques, discover out-of-print articles, find specific tips from Methods of Work, and more. Reserve yours today!



This 2nd edition DVD features;

- Over 1,000 articles from 184 issues
- Sought-after, out-of-print articles
- Over 2,000 tips from our Methods of Work column
- Original photos and illustrations
- Easily searchable for PC and MAC
- BONUS VIDEO: Three Simple Finishes

Price: \$125.00 Product # 011023

The Best of FineWoodworking DVD, 2nd Edition

To order use the attached envelope, call 866-288-4167, or go to FineWoodworking.com/DVD

Owners of previous CD, call 866-845-2653, or email customerservice@Taunton.com for your upgrade.

The 2nd edition DVDs ship on 11/30/06. Free shipping if ordered by 12/31/06.





Installing a tile floor takes time. Finding the article that shows how, shouldn't.

The Best of Fine Homebuilding DVD, 2nd Edition, with 50% more content than our previous CD version, is an essential tool that simplifies almost any job. This complete and authoritative resource gives you fast access to vital information from 25 years of our magazine when you're in the office or on the job site.

In 60 seconds or less, you can locate the exact article, tip, or technique you need to tile a floor that won't crack, frame a dormer, or install a leak-proof shower pan. Order yours today!



This 2nd edition DVD features;

- Over 1,000 articles from 180 issues
- Valuable out-of-print articles
- Over 1,300 tips from our Tips & Techniques column
- Original photos, plans, and diagrams
- Easily searchable for PC & MAC

Price: \$125.00 Product # 021023


The Best of Fine Homebuilding DVD, 2nd Edition

To order use the attached envelope, call 866-288-4167, or go to FineHomebuilding.com/DVD Owners of previous CD, call 866-845-2653, or email customerservice@Taunton.com for your upgrade.

The 2nd edition DVDs ship on 11/30/06. Free shipping if ordered by 12/31/06.

EDITED AND DRAWN BY JIM RICHE

methods of work

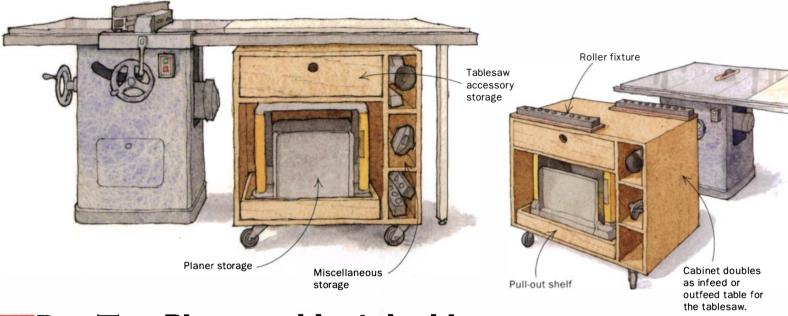

Best Tip

as outfeed stores outbeed stores out

Juris Pukinskis started making sawdust in Mr. Miller's seventhgrade woodshop. Later, he graduated to building houses and furniture in Storrs, Conn. This fall, he's moving his family and shop to Ithaca, N.Y., where new adventures await.


Planer cabinet doubles as outfeed table, stores out of the way

Because space is at a premium in my shop, I built a roll-around cabinet for my benchtop thickness planer. When in use, the planer sits atop the cabinet (right). When not in use, the planer is placed on a shelf under the cabinet, and the cabinet is rolled out of the way under the extension wing of my tablesaw (top left). A pair of removable rollers on the top of the stand allow it to serve double duty as either an infeed or outfeed table for my tablesaw (top right). The cabinet is made from ¾-in.-thick birch plywood, edged with solid birch.

The stand has a drawer on top, a pull-out shelf down below, and three storage bins along one side. Since the stand usually is parked under my tablesaw, I use the upper drawer and the bins to store tablesaw accessories—blades, miter gauge, dado set, inserts, and the like. The bins also serve as a place to store planer accessories.

To use the stand as an infeed or outfeed table, I add two rollers to the top of the stand. Each roller is mounted to a plywood base with dowels on the bottom that fit into holes drilled in the cabinet top.

-JURIS PUKINSKIS, Storrs, Conn.



A Reward for the Best Tip

Send your original tips to Methods of Work, Fine Woodworking, PO Box 5506, Newtown, CT 06470, or email fwmow@taunton.com. If published, we pay \$50 for an unillustrated tip; \$100 for an illustrated one. The author of the best

tip will get a 12-in.
combination
square (with
center head and
protractor) from
the L.S. Starrett Co





Operate 3-phase woodworking machines from single-phase!



- Immediate delivery
- Two year warranty
- True 3-phase output
- · Whisper quiet operation
- No-charge tech support, 24-7
- · Regulated output for CNC Machines
- The most capacity at the least cost, guaranteed!
- Protect your investment Insist on Phasemaster®





General Offices South Bend, IN 46617 800-348-5257 574-289-5932 (fax)

Western Region 4127 Bay St. #6 Fremont, CA 94538 510-656-8766 510-657-7283 (fax)

The World Leader in Single to Three-Phase Power Conversion

READER SERVICE NO. 138

Original TORMEK or an imitator?

A FEW REASONS TO CHOOSE TORMEK

- 1 We are specialized in sharpening and committed to continuous development.
- 2 Fully protected (IP54) industrial motor with built in cooling fan. Maintenance free and rated for continuous duty.
- 3 The powerful AC motor maintains the grindstone speed under load.
- 4 Unique range of jigs for the easiest sharpening of planer/jointer knives, turning gouges, turning skews and much more.
- 6 Stainless steel main shaft and stone hardware. Prevents rust and wear on bearings.
- 6 Handbook with 549 line drawings that show in detail how to sharpen all your tools.







USA 1-800-5-TORMEK UK 0845 330 9100 **AUSTRALIA 07 3390 2474** CANADA 1-877-2-TORMEK SOUTH AFRICA 021 987 6071





methods of work continued

Jig makes it easier to plane sides of drawers

It usually is necessary to plane the sides of an assembled drawer in order to get a perfect fit. But it can be a chore to hold the drawer in place for planing.

The typical routine requires that you clamp the drawer to the side of a bench, take a pass with the plane, unclamp the drawer, check the fit, reclamp, take another pass with the plane, and so on.

This simple jig saves time and effort. It consists of two main parts: a yoke that mounts in the end vise and a


Once the jig is set up, you simply slide the drawer in place and plane. Slide the drawer out to check the fit. The jig provides support so that the sides stay flat. It also holds the drawer in such a way that I don't feel like I'm stressing the corner joinery.

The yoke is a rectangular piece of ¾-in.-thick plywood. A 1-in.-wide slot cut in the yoke accepts either the drawer front or back. Attaching a hardwood cleat to the underside of the yoke allows it to be clamped in the vise.

The support board has slots on each side to accommodate drawers of different depths. I hold it in place by sliding a clamp through one of the benchdog holes, which keeps the clamp clear of the planing area. A bench hook also would work. By

> flipping the piece end for end and moving the clamp to different benchdog holes, I can fit drawers of almost any width or length. If I can't, I just cut a new slot in the plywood.

> > -MARK EDMUNDSON, Sandpoint, Idaho

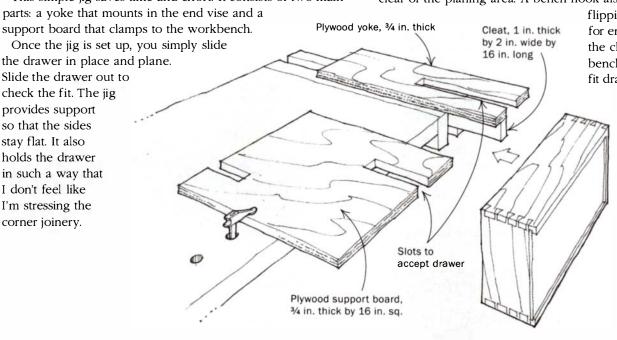



Quick Tip

Here's a quick-to-make tool for measuring diagonals when checking a box for squareness. Cut a telescoping antenna from an old TV or radio and form each end of the antenna into a point by cutting and hammering it. The antenna is stiff enough to hold its length accurately, even when fully extended. Plus, it telescopes closed for convenient storage.

> -KAREN McBRIDE, Dunrobin, Ont., Canada

Use air compressor to find leak in vacuum-clamp bag

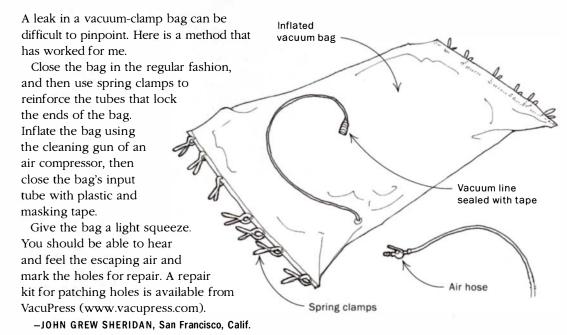

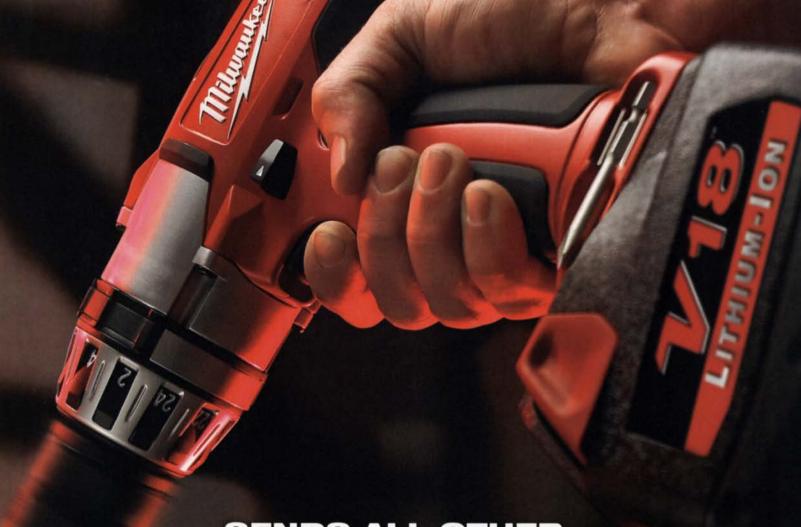

SENDS ALL OTHER 18-VOLT TOOLS RUNNING HOME TO THEIR CHARGERS.

With up to 50% longer run time than Ni-Cad systems, Milwaukee V18™ Li-Ion tools keep working – at full power – long after other 18V tools whimper and quit. Even other Li-Ion systems can't match V18 performance in your real world of high loads, extreme temps, and unending pressure to produce. And you can get the V18 performance edge two ways: in 10 all-new Milwaukee V18 tools – and by sliding new V18 batteries into any existing Milwaukee 18V tools. Then, while other 18-volt tools are running home to their chargers, your V18-powered tools can help run up record profits for you.



For the whole V18 story, run to www.milwaukeetool.com



All Milwaukee Lithium-Ion batteries come with the industry's only 2000 Charge/5 Year Warranty

Milwaukee

NOTHING BUT HEAVY-DUTY

methods of work continued

Fast-action biscuiting jig

Like many woodworkers, I embraced biscuit joinery years ago. But I never seem to have a nice, flat, usable space to register the base of the joiner while making cuts. This is mainly because my workbench tends to be covered with dried glue drops, shavings, and other whatnots.

I solved the problem with a simple, modified bench hook. It provides a flat, smooth registration surface and has a pair of fences to hold the work. The best one is the split fence, which simplifies cutting biscuit slots in the ends of mitered frames.

The jig is made from ¾-in.-thick melamine. Cut the base to 12 in. wide by 16 in. long and each plywood fence to 2 in. wide by 18 in. long.

Start by cutting a ¼-in. by ¼-in. rabbet along one edge of both fences. The rabbets provide a place for dust and shavings to collect, so they won't prevent the workpiece from butting tightly against the fence.


To install the split fence, first mount it in one piece by screwing from the top and bottom. Once it's mounted, mark a 4-in.-long cutout in the center. Remove the fence and cut out the marked section. Then sand a small radius on all four corners of the gap. The radius is important because you're going to be wedging workpieces against these corners and you don't want them so sharp that they mar your material. Install all fences with glue and screws.

To cut a slot in the edge of a workpiece, simply hook the split fence on the edge of the workbench and place the workpiece against the straight fence. The melamine provides a smooth and true registration surface.

The jig really shines when cutting the end of a mitered joint. No fussy setup here. Simply place the workpiece in the opening of the split fence, then rotate the workpiece until it binds in the gap. As you make the cut, apply continuous sideways pressure to prevent the workpiece from moving.

-GORD GRAFF, Newmarket, Ont., Canada

Frisbee

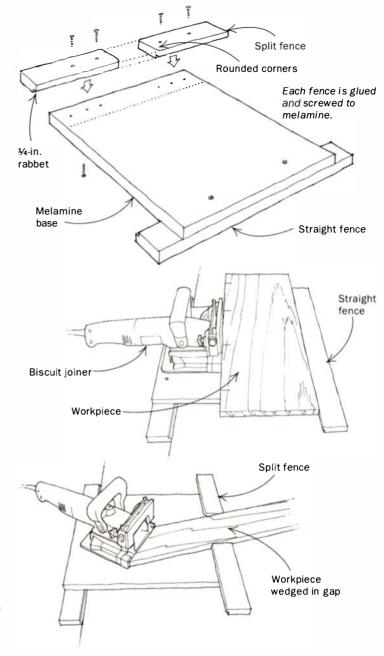

2-in. hole 80 LTS MIX

Empty hardware into can through hole.


Hardware-sorting Frisbee

I have several tin cans filled with mismatched screws, bolts, nuts, wing nuts, and washers. To find a part, I had to dump the contents on my bench and search through the entire collection. Then all the parts had to go back in the can.

To make the job easier, I now use an old Frisbee as a sorting tray. First, though, I used a 2-in.-dia. Forstner bit in a drill press set at a low speed to drill a hole near the edge of the Frisbee.

I just pour the hardware into the Frisbee and search for the part. Then, with the hole held above the can, I push all the loose hardware directly into the can.

-SERGE DUCLOS, Delson, Que., Canada

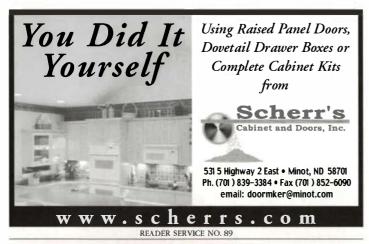



READER SERVICE NO. 68



Great for any handheld plunge router applications. Off-set router plate allows for total control

of your router. The large, clear base and handle eliminates tipping when edge routing, but still

INTRODUCTORY PRICE \$595
ORDER ITEM #1484

allows a clear view of your work. Self contained electronics, no plug required! Made of heavy duty,


tough clear plastic. Mounts quickly and easily to any router.

1-800-533-9298 • mlcswoodworking.com





READER SERVICE NO. 139

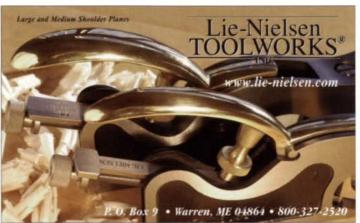

READER SERVICE NO. 126

NAIT Advanced Woodworking & Furniture Design Get hands-on experience in design drafting furniture histor

Get hands-on experience in design, drafting, furniture history and much more. This one-yearprogram, held in NAIT's world-class woodworking facilities, is geared toward students with a general background in Millwork or Carpentry.

Starts Fall 2006 -

Applications now being accepted; portfolio recommended.

For more information phone 780.491.3184 | www.nait.ca/wood


Get in. Go far.



READER SERVICE NO. 32

WODCRAFT Helping You Make Wood Work

FREE Tool Catalog



Your Best Work Starts With Us...

with over 8,000 of the finest woodworking tools in the world, Woodcraft can help you work more efficiently and skillfully than ever. Call for your free copy today.

800 542-9115

www.woodcraft.com

406 Airport Industrial Park Road P.O. Box 1686 Parkersburg, WV 26102-1686

Dept: C06WW10Q

Visit one of our stores

located nationwide! Call us

for the store nearest you.

OUALITY WOODWORKING TOOLS • SUPPLIES • ADVICE™

Some dovetail jigs promise you everything...

The Keller Dovetail **System only promises** what it can deliver.

Fast setup. No test cuts. Precision joinery. Unlimited widths. Classic and variable spacing. Compound, acute and obtuse angles. Curved dovetails. Box joints. Made in USA since 1976. 20-yr. warranty. 30-day money-back guarantee.

"Your best choice. It's the easiest of all the jigs to use and great for production use."

-Woodworker's Journal

VIDEO: \$8.95 + \$2 P/H



KELLER & CO.


1327 'I' Street, Dept. F116 Petaluma, CA 94952 1-800-995-2456 707-763-9336

www.kellerdovetail.com

Keller Dovetail System

Simple. Fast. Accurate. Enjoyable!

READER SERVICE NO. 26





READER SERVICE NO. 47

READER SERVICE NO. 18



Wood Moisture Meters


Wood moisture is a crucial factor that determines usefulness and stability of wood. Lignomat offers pin and pinless meters, giving our customers a real choice to select the meter for their needs.

The versatile mini-Ligno pin meters from Lignomat are a favorite for professional woodworkers and serious hobbyists, for all woods from veneer to heavy timbers. Ask about free brochure for pin and pinless meters.

Lignomat USA Ltd. PO 30145, Portland OR 97294


800/227-2105 503/257-8957 www.lignomat.com


READER SERVICE NO. 30

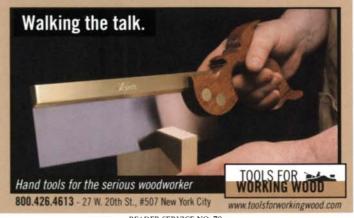

Introducing the

Tecnomax Combination Machines









SIMPLY SUPERIOR...

The culmination of years of research and development from a company with only one goal in mind: Produce the ultimate combination machine in the world today.

Mini Max USA 866.975.9663 www.minimax-usa.com

tools & materials

POWER TOOLS

A circular saw for woodworkers

HE FESTOOL TS 55 EQ IS A CIRCULAR SAW LIKE NO OTHER.

With its splinter guard, razor-sharp blade, and wellengineered guide system, the saw makes long,
straight cuts—whether on plywood, tabletops, or cabinet doors---extremely
accurately, cleanly, and easily,
virtually eliminating the
need for a larger, more expensive panel

saw or sliding tablesaw. The Festool adds a unique plunge action, opening up a range of other tasks.

I work with a lot of cabinet-grade plywood, and while I have a panel-saw attachment for my tablesaw, wrestling the 4x8 sheets onto the carriage without scratching the veneers or throwing out my back is a chore. With the TS 55EQ, I can whittle down large sheets to a manageable size quickly and cleanly.

The key to the saw's accuracy is the 55-in. guide rail made from extruded aluminum. The base of the saw mates with and slides effortlessly along tracks in the guide rail. You can correct for any slop in the fit by tightening two small cam screws on the saw's base. Two foam strips under the rail provide a firm footing to hold it in place without clamps, and they protect the wood surface from scratches. Simply align the edge of the rail with the cut line, set the saw on the rail, and make the cut.

The guide rail mates with Festool's OF 1010 EQ router (with guide rail

No clamps necessary. Foam strips on the underside of the guide rail prevent slipping during a cut.

attachment, No. 488752), making the system even more valuable and versatile.

FESTOOL TS 55 EQ

Blade speed: variable,

Cutting depth: 115/16 in. on

Kit includes: Carrying case,

plastic stop for stopped cuts,

and 48-tooth carbide blade

guide rail; 21/8 in. without rail

Dust port: 1 in. and 17/16 in. dia.

Motor: 10 amps

2,000-5,200 rpm

Weight: 10 lb.

Key features of the saw include a plunge depth stop (metric), a dust port, and a splitter to prevent binding. A splinter guard acts like the zero-clearance insert in a tablesaw to help make splinter-free cuts, even close to the edge of plywood, in stacks of veneer sheets, and on cabinet doors. The controls are easy to reach and the saw is comfortable to use, portable, and stores easily. It retails for \$430. For more information and to find out about accessories, go to www.festoolusa.com.

—Mark Edmundson is a custom woodworker in Sandpoint, Idaho.

CLAMPING


QUICK-GRIP CLAMPS ADD MUSCLE

IRWIN'S QUICK-GRIP XP has essentially the same design as the familiar, smaller Quick-Grip clamp, but it's bigger, beefier, and boasts twice the clamping pressure—550 lb. with just one hand and up to 900 lb. with two.

The XP clamps excel on larger projects, such as joining legs to stretchers or assembling carcase sides, and they work well as secondary clamps for leveling tabletop or panel glue-ups. Available in six sizes—from 6 in. capacity up to 50 in.—the clamps range in price from about \$25 to \$55 (Amazon.com).

 Matthew Teague is a woodworker and writer in Nashville, Tenn.



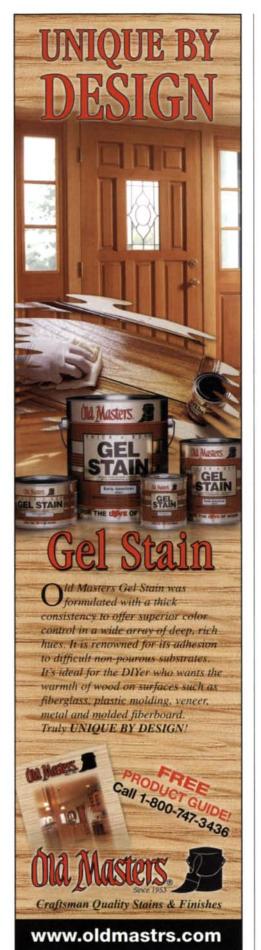

READER SERVICE NO. 39



Est. 1976



1-541-327-1000 sales@nwtimber.com www.nwtimber.com

BUY FIGURED NORTHWEST HARDWOODS ONLINE 24/7

Online Store

Specialty Hardwoods for the Hard to Please


READER SERVICE NO. 107




 ${f WoodRat}^{f e}$



READER SERVICE NO. 136





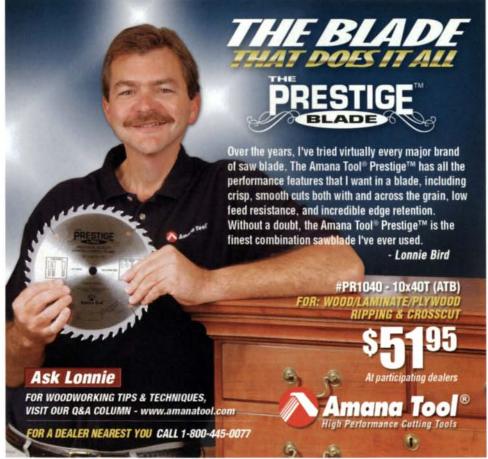

tools & materials continued

AIR TOOLS

Nailer drives both 23-ga. brads and pins

HE NIKLE NS2340 IS THE LATEST in 23-ga. nailers, offering the ability to drive both pins and brads without having to adjust or modify the gun.

Extrathin, 23-ga. pins are ideal for finish work, providing a nearly invisible fastener. What's more, the thin fasteners virtually eliminate the threat of splits in thin material, and their round shanks drive straighter than thicker-gauge fasteners. The problem with the headless



The Nikle holds 200 fasteners. And the carriage automatically adjusts to fit different lengths, from 1/2 in. to 19/16 in. long.

NIKLE NS2340 Weight: 2.2 lb. Capacity: 200 fasteners Air pressure: 60-100 psi Fasteners: 23 ga., 1/2 in.

pins is that they offer only minimal holding power. With 23-ga. brads, you get the benefits of headless pins with a significantly increased grip.

The Nikle performed beautifully. It did not jam during use, and it set even the longest pins accurately. A turretstyle air exhaust on top can be adjusted easily to direct the blast away from your face. A very narrow nose places nails accurately, and a double trigger helps prevent accidental firing. The nailer is lightweight and comfortable. For more information, visit www.nikletools.com; to buy it (\$220), go to www.floydtool.com (800-882-7060).

> -Roland Johnson is a contributing editor.

ACCESSORIES

ADAPTER ALLOWS **IMPACT DRIVERS TO ACCEPT BITS WITH ROUND SHANKS**

COMPARED WITH A CORDLESS DRILL, an impact driver has a number of advantages. It is lightweight and compact, generates more torque, and offers more driving control. But its quick-change chuck accepts only hex-shanked drill-bits, which means you can't use your drawerful of roundshanked bits. To remedy the problem. DeWalt introduced an all-metal, 3/8-in. keyless chuck adapter (No. DW0521) for impact drivers that accepts roundshanked bits up to 3/8 in. dia. I used it to build a bunch of shop fixtures, and it worked well. It is available from DeWalt (www.dewalt.com) for about \$30.

-Tom Begnal is an associate editor.



Now you can use round-shanked bits in your impact driver. DeWalt's keyless chuck adapter for impact drivers accepts round-shanked bits up to 3/8 in. dia.


CORDLESS TOOLS

DRILL/DRIVER NOT GREAT AT EITHER TASK

BOSCH'S LATEST LITHIUM-ION CORDLESS TOOL is the 10.8v I-Driver (model PS10-2).

The drill-driver has some useful features, such as a pivoting head, plenty of power, and an electronic clutch, but it is heavy and bulky. The tool weighs 2½ lb. and has a 2½-in.-dia. grip, making it awkward to hold, even with large hands. The trigger is comfortable, but the variable speed is hard to control when driving screws. However, the tool has enough power to drive 227, 2-in.-long drywall screws into a stack of MDF. For drilling, the 600-rpm Bosch is too slow to compete well against a cordless drill. That said, the pivoting head and the power offered could make the tool useful for installing hardware inside cabinets. The kit (\$150) comes with two batteries, a carrying case, and a 30-minute charger.

—John White is Fine Woodworking's shop manager.





Forrest Blades

Ideal for High-End Kitchens and Baths

For almost 60 years, experienced woodworkers have relied on Forrest for the very finest in precision-engineered saw blades.

Kitchen and bath remodelers especially appreciate the smooth, quiet cuts that Forrest blades deliver—without splintering, scratching, or tearouts. In fact, independent tests rate Forrest blades as #1 for rip cuts and crosscuts. So they are perfect for cabinets, countertops, and flooring.

Forrest blades and dados owe their superior performance to a proprietary manufacturing process, hand straightening, and a unique grade of C-4 micrograin carbide. Nobody beats these American-made blades for quality or value.

"Your blades are without question the best by miles, and I have tried them all."

Bob Jensen--Fridley, MN

"From the first cut on, I realized that this blade was a bargain at any price! Nothing else I have cuts comparably." Calvin Brodie—Spanaway, WA

Forrest has over 12 blades designed for serious woodworkers. These blades are especially useful for high-end remodeling:



Duraline — Available in several tooth count/style combinations for flawless cutting of laminates, acrylics, wood, and more.



Duraline Hi-AT – Best for cutting two-sided veneers and low pressure laminates without chip-outs or splintering.





Solid Surface Planer – For super-smooth cutting of solid surface countertops without scratches or long finishing times.



Woodworker II – The best-rated all-purpose blade for excellent rips and crosscuts on all hard and softwoods.



Custom Woodworker II

— A specialty blade that's ideal for box joints, dovetails, flat bottom grooves, and high feed rates.



Chop Master – For tight, perfectly cut miter joints and smooth cross cutting at any angle.



Dado King – The finest multi-tooth set for making flat-bottom grooves without splintering across and with the grain.

It's Easy to Order

All Forrest blades come with a 30-day, money back guarantee. So order today in any of these convenient ways:

- Visit one of our fine-quality dealers or retailers.
- Call us toll free at 1-800-733-7111.
 (In NJ, 973-473-5236) Ask about special discounts, free shipping on orders over \$275, and discounts for blade sharpening.
- Contact our internet store: www.stores.yahoo.com/forrestman




The First Choice of Serious Woodworkers Since 1946

© 2005 Forrest Manufacturing

Code FW

tools & materials continued

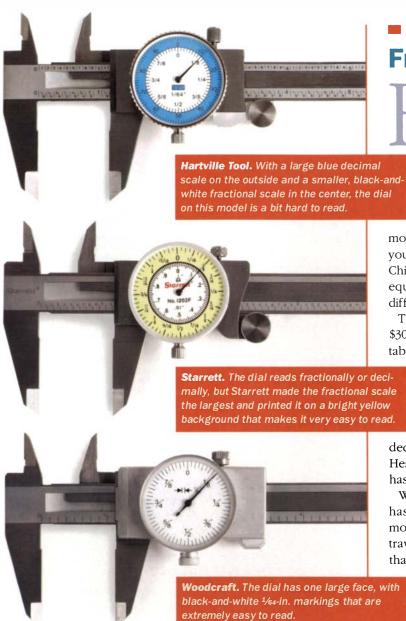

HEAD TO HEAD

Fractional dial calipers

IVE YEARS AGO, SOME BRILLIANT ENTREPRENEUR came up with the idea of making dial calipers that could be read fractionally in 64ths of an inch (see *FWW* #157, p. 31), with one full revolution of the dial equal to 1 in. That invention provided woodworkers with an accurate measuring tool that didn't require mathematical conversions from decimals to fractions.

Now, several other manufacturers have entered the market fray. I recently took a look at three distinctly different

models, from Hartville Tool, Starrett, and Woodcraft, to see what you get at three different price points. All three tools are made in China of satin-finished, hardened stainless steel, and all three tested equally on the accuracy scale. But several of the details are quite different, especially the dial faces.

The Hartville Tool caliper (www.hartvilletool.com) costs about \$30. The head moves smoothly along the bar via a serrated thumb tab or a wheel, and it features both a fractional and a decimal scale.

The fractional scale is on a white background, but it's a bit awkward to use because the scale is in the center of the dial, and my eye is naturally drawn to the outer ring.

Starrett's model 1202F-6 caliper sells for \$70 (www. hartvilletool.com). The dial also reads either fractionally or decimally, but the fractional scale is larger and very easy to read. Head movement is activated with a spring-loaded thumbwheel that has virtually no backlash.

Woodcraft's caliper costs about \$50 (www.woodcraft.com). It has one large dial face that's extremely easy to read. The head movement is controlled with a thumb tab only—no wheel—so the travel was not as easy to control as that on the other two calipers that have thumbwheels.

Overall, I favored the Starrett because the dial was so easy to read and the thumbwheel had less backlash.

-William Duckworth is a contributing editor.

CLAMPING

CLAMPING CAUL SAVES ON TIME AND CLAMPS

TO ENSURE GOOD CLAMPING PRESSURE when adding solid-wood edging to plywood panels, it's not unreasonable to place a clamp every 8 in. or so. On a 48-in. edge, that means seven clamps. With the new Bowclamp clamping caul, you can do the same job with two clamps.

The Bowclamp is simply a length of hardwood with a precise, gentle curve routed along one edge, and a slot on the opposite edge to accept the jaws of the clamps. As you tighten the clamps, the curved face of the Bowclamp flattens, transferring clamp pressure along the entire length of edging. The Bowclamp can be used for glue-ups as well, such as keeping a panel flat or reaching across a large carcase to put pressure on a middle shelf.

The caul is available in three standard lengths: 2 ft. (\$22), 3 ft. (\$27), and 4 ft. (\$32). Lengths of 6 ft. and 8 ft. are available as special orders. For more information, contact Zig Industries (973-395-1588; www.bowclamp.com).




-Т. В.



READER SERVICE NO. 58



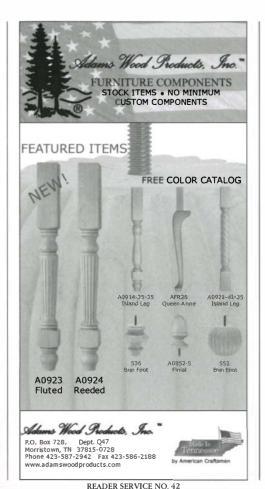



Bargain

Save up to 80%!

- Architecture
- Renovations
- Home Décor and more!

 Workshop Skills, Do-It-Yourself, Fitness, Sports, Biography, History, Fiction, Travel - 67 Subject Areas.

Free Catalog: 1-800-677-3483

Edward R. Hamilton, Bookseller 2129 Oak, Falls Village, CT 06031 www.erhbooks.com/gmm

READER SERVICE NO. 11



Complete plans include built-in icebox, stove, water tank, 12V electric system, cabinets, floor hatch for porta-potty. Sleeps two inside the cabin, 4' x 8', 900 lbs.

Kuffel Creek Press • www.kuffelcreek.com PO Box 2663 • Riverside • CA 92516 • fax 951/781-9409


READER SERVICE NO. 19

Advanced Dust Collection





READER SERVICE NO. 133

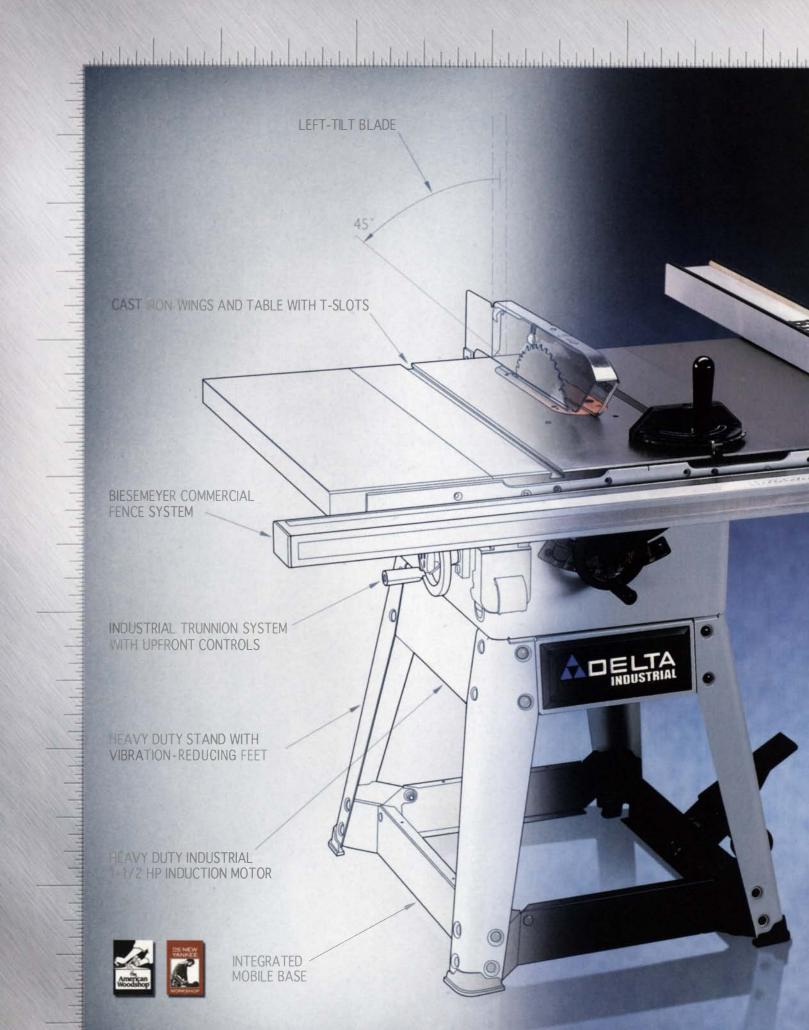



It should come as no surprise that DELTA took the time to introduce left-tilt Contractor's Saws the right way.

Af ter all, DELTA invented the Contractor's Saw category. And once you try a DELTA, there's no going back.

Besides a left-tilt blade and powerful 1-1/2 HP motor, you also have a choice of three fence systems including a Biesemeyer or DELTA UNIFENCE. You even get maximum mobility with a newly designed base. Plus, its new collection tray captures 80 - 90% of the dust. So find perfection. Visit deltamachinery.com/contractor for more details, or to join our DELTA Owners Group.



LEFT-TILT BLADE



INTEGRATED MOBILE BASE



DUST PORT



YOUR ACHIEVEMENT. OUR TOOLS.

fundamentals

Develop a game plan

MAKE A STEP-BY-STEP PLAN FOR EACH PROJECT TO MAXIMIZE EFFICIENCY AND MINIMIZE MISTAKES

BY STEWART CRICK

any woodworkers use drawings and cutlists for each project to help them avoid waste and errors and to keep their work organized. I like to go one step further and develop a complete game plan. This plan is basically a series of steps I follow to mill, shape, assemble, and finish the individual parts and components of a project. It's a disciplined and careful way of thinking in advance about the best way to build a project, using the tools in my shop.

I think about these questions in a specific order, starting with the largest task and working down to the smaller details. If a piece is complex enough, I'll write down the plan on paper. For simpler projects, I keep the sequence in my head. In the process, I almost always find ways to save time by combining steps. I also spare myself some aggravation by making sure that I don't work myself into any corners. As a result, my shop sessions are much more efficient and enjoyable. Here are some tips:



1. Find ways to combine milling tasks

When milling, try to avoid the confusion and wasted time that come from repeated machine setups.

A small end table that I built recently, for example, requires ¾-in.-thick stock in each of three major sub-assemblies. It makes sense to mill all of that stock in one operation—the milling will be more consistent and you will spend less time breaking down and setting up machines.

But don't let the quest for efficiency lead you into other problems. If your stock is not fully acclimated to the shop, or if you know you'll be out of the shop for a couple of weeks between building assemblies, plan to mill up only enough stock to build one assembly at a time.

2. Find the right sequence for fashioning parts

Think about all the steps needed to produce each individual piece, and decide on the best tools and most streamlined sequence for carrying out those steps.

A set of tapered table legs, for example, will require both tapering and mortising. In many cases, you'll want to cut the mortises before tapering the legs because it is difficult to hold a tapered leg secure and level in a router jig, on a drill-press table, or on a workbench. On curved parts, too, it's often easier to cut the joinery before the curves.

Some tasks that take place late in a project can be simplified if you take preparatory steps early on. One

THINK IT THROUGH My planning process sometimes yields nothing tangiblejust a set of mental notes to guide my work. For more complex projects, I'll jot down a few notes or make a full written set of steps to follow in the shop. These notes also make it easy to take a long break from a project and hit the ground running when I return. Here's what such a list might look like for a simple end table with a drawer.

- 1. Rough-mill all pieces
- 2. Make legs
 - a. Final-mill leg blanks
 - b. Lay out and cut mortises
 - c. Cut tapers
 - d. Sand legs
- 3. Make side rails
 - a. Final-mill stock
 - b. Lay out and cut tenons
 - c. Dry-fit side rails to legs
 - d. Sand rails
- 4. Assemble table base sides (side rails to legs)
 - a. Dry-fit parts; dry run of clamping strategy
 - b. Glue up sides

(CONTINUED ON PAGE 34)

Elevate Your Performance with Freud's FT1700 Router...



Convenient plunge base is perfect for your hand held routing applications.

Ideal for Table Use



Motor transitions easily to the fixed base for table mounted applications.



...with Full Above-Table Adjustability and FREE Plunge Base.

FREE Plunge Base Introductory Offer

Purchase Freud's FT1700VCEK 2-1/4 HP Router at a participating dealer between 10-1-06 and 12-31-06 and receive a free plunge base by mail-in offer. Original receipt, UPC from package, and mail-in offer form must be received within 60 days of original purchase. Valid for purchases made in the U.S. only. Limited to one per household or business. Visit your local participating dealer for details.



The Freud Advantage

- · Above-table height adjustments and bit changes are quick, easy and precise.
- 13 Amp Motor for extreme power and durability.
- Electronic Speed Control maintains constant speed under load.
- Soft Start for reduced startup torque.
- Sealed electrical components for protection from dust and debris.





MONEY BACK GUARANTEE

One Router. Two Bases. Infinite Possibilities!

fundamentals continued

simple example is remembering to rabbet the back edges of case components before assembling the case (to allow installation of the back).

When building a cabinet with inset doors, for example, make a note to mortise for the hinges before assembling the case. It's easier to do this work before the case is assembled than it is to mount a router on the edge of a cabinet frame. You can mortise the doors later, after fitting them to the case.

3. Decide which components to assemble first, next, and last

It's just easier to fit some assemblies or joints together accurately if you build them in a particular order. You build one part, and then fit the next one to it.

For a small end table, I decided to build the base first so that I could then custom-fit the drawer by transferring dimensions from the opening I had created. In doing so, I spared myself no end of fussing and measuring.



I fit a drawer by transferring dimensions from the opening. In doing so, I spare myself no end of fussing and measuring. The mortise-and-tenon joinery in the table's base offers another example. One approach would be to cut both portions of the joint to the specified dimensions. But doing this risks wasting a lot of time shimming or trimming tenons to fit. Most teachers will tell you the better way is to cut the mortise first, because the width of the mortise is less variable, as it is determined by the width of the tool used to cut it. Then transfer the dimensions and cut the tenons to fit. For my table, that meant milling up and mortising the legs before I started on the aprons.

Wood movement is another area to consider, particularly if your project will sit idle for long stretches between shop sessions. On my end table, I saved gluing up the top for last. If I had done it earlier, it might have warped before I could build the other components.

4. Plan for the finish before you begin

At some point early in my planning, I decide what type of finish to apply. First, I preview the appearance of my top candidates on sample boards. I also note any surfaces that should be sanded and finished before assembly.

For example, it's best to finish the panel in a raisedpanel door before the door goes together. This will take the hassle out of applying finish at the corners, and it will prevent bare spots from showing at the edges when the panel shrinks.

In casework, it also pays to sand and finish any interior surfaces that need it before gluing up. In this way, you

don't wind up awkwardly trying to sand the inside of a bookcase. Just be sure to keep finish off any surfaces that will be glued.


5. Glue up in stages


Think ahead about how much of a particular assembly you can glue up successfully at any one time. It might be possible, for instance, to glue up the entire base of a table or an entire frame-and-panel case at once. But you'll make yourself crazy and use all of your clamps trying. How many clamps do you have? And how many arms? You might end up with the glue dry and the assembly out of whack somehow.

Instead, think about breaking the glue-ups into manageable chunks. And plan to spend some time on a dry run of each glue-up. Nothing beats this technique for identifying trouble spots.

THINK IT THROUGH (CONTINUED)


- 5. Make back rail and dividers
 - a. Final-mill stock
 - b. Lay out and cut tenons on back rail and lower divider
 - c. Lay out and cut tail on upper divider
 - d. Sand rail and dividers
- 6. Final table base assembly
 - a. Dry-fit base to lay out legs for upper divider; dry run of clamping strategy
 - b. Mortise legs for upper divider
 - c. Glue up table base
- 7. Install doublers, runners, and kickers
 - a. Final-mill all parts
 - b. Cut to final dimensions
 - c. Test-fit and dry run of clamping strategy
 - d. Glue in doublers, runners, and kickers
- 8. Build drawer
 - a. Final-mill all parts
 - b. Cut to final dimensions
- 9. Build and install top
 - a. Final-mill top pieces and rear cleat
 - b. Dress table pieces
 for edge gluing
 - c. Dry-fit table pieces; dry run of clamping strategy
 - d. Glue up tabletop
 - e. Cut rear cleat to final dimensions
 - f. Test-fit rear cleat
 - g. Install rear cleat
 - h. Drill holes in rear cleat, kickers, and upper dividers to receive top
 - i. Dry-fit top; mark and drill pilot holes
 - j. Prepare tabletop for finishing
 - k. Finish tabletop
 - I. Install tabletop
- 10. Finish table











www.burgessedge.com
READER SERVICE NO. 143

Box 32, Route 125 • Ripton, VT 05766

Phone: 802-233-1489 • E-mail: bmichael@sover.net






READER SERVICE NO. 91

35





"Oneida's Dust Deputy is designed to capture even the finest dust in a simple bucket - before it gets to the filter. And that is exactly what it does, remarkably well."

- Fine Woodworking / Oct. 2006

Call for FREE Brochure! **1.800.732.4065**

READER SERVICE NO. 54

Order Online! WWW.Oneida-air.com









Shop Online For Whiteside Router Bits Systimatic Saw Blades Fisch Forstner Bits Bench Dog Call For Your Free Catalog

1-888-811-7269 www.Routerbits.com




TECHNOLOGICAL

BOOM SHACKA LACKA LACKA BOOM SHACKA LACKA BOOM SHACKA LACKA LACKA



BOOM.



Maxlife™ 369™ Tripod Flashlight

Hands-free use. Stable platform. Adjustable head. 6 long life LED bulbs. 3,6 or 9 AA batteries yield up to 200 hours of light. Part of the Stanley* illumination tool collection. Learn more at stanleytools.com/tripod

Now available at Target*

STANLEY

READER SERVICE NO. 52



The Versatile Huntboard

This sideboard variation is just as comfortable in a hallway or a living room

BY GARRETT HACK

he huntboard is a wonderful furniture form, a relaxed country cousin to the more formal and high-style sideboard. It's essentially a tall serving table, with drawers and doors for storage of dinnerware. I've long admired the form, so for this year's annual auction of the New Hampshire Furniture Masters, I decided to design and build a cherry huntboard.

Typically, when designing furniture, my first thoughts are about form, proportion, shape, and detail. But versatility also can be an influence, especially for speculative work. I want potential bidders to see what they need—a sideboard in this case—but I also think my work could have many lives

beyond the one I design for. This piece would be at home serving as a desk or a display table in a foyer or hallway.

The focus of my design is the three central drawers, with flanking doors adding a sense of balance. The case itself is deep and tall, and is engineered to withstand the weight of a collection of flatware and dinnerware. It's also designed to withstand seasonal wood movement.

Shape the legs and add the banding

In designing the legs of the huntboard, I used a full-size mock-up to help me gauge

where they needed refining. After all, visual strength is just as important as actual strength. Once I completed the mock-up, I used it to lay out and cut the real legs, as well as to lay out the cuff banding and mortises. Cut the legs on the bandsaw and refine the shape with handplanes.

After cutting all of the mortises and the primary taper in the legs, install the cuff banding. Although you can make your own custom banding (see *FWW #*166, pp. 116-120), ready-made banding is available (www.vandykes.com, www.woodcraft .com, and www.rockler.com). Cut the

Start with the legs



The foot of each leg is highlighted with a cuff-banding inlay and a secondary taper that give the piece a light, elegant appearance. After cutting the primary tapers on the bandsaw, miter and glue in the cuffbanding sections (1). Cut the secondary taper on all four sides, staying well clear of the cuff. Refine the taper with a handplane. Make guide marks just below the cuff (2) and at the toe of the foot, and plane until both marks are gone (3).











The huntboard glue-up is complex. It's easiest to start by assembling the side aprons and the legs. But glue only the front legs in place at this stage—you'll need to remove the rear legs for a later step (see p. 42).

39

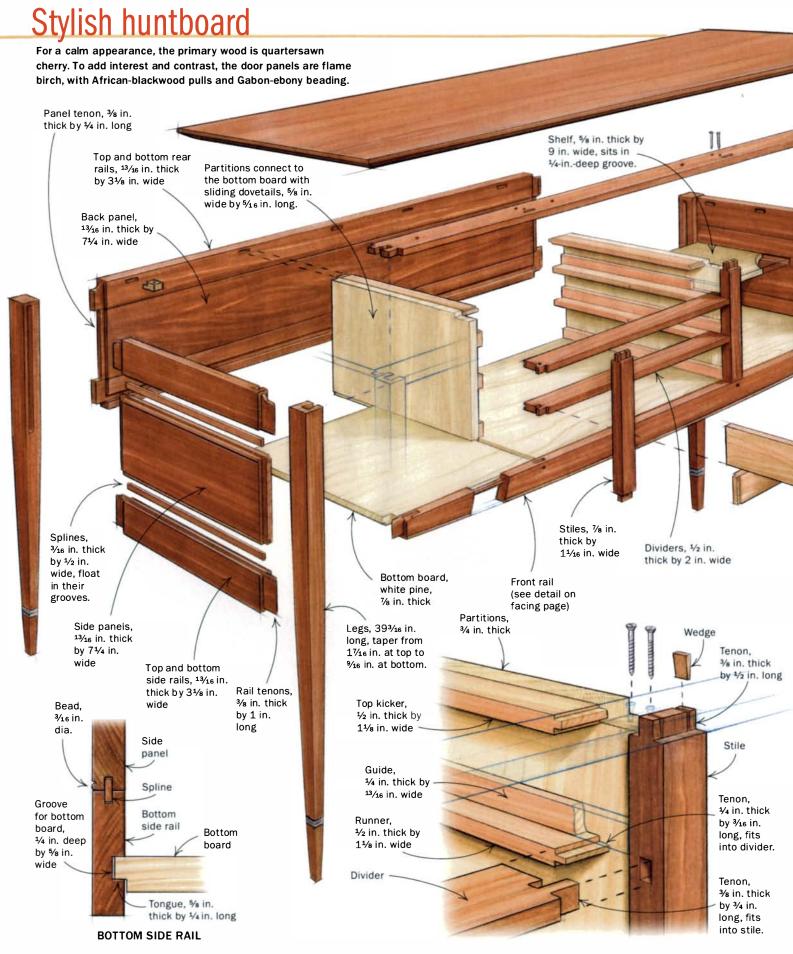

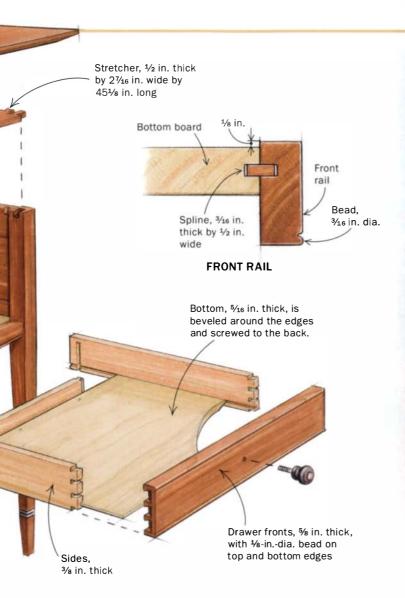








FITTING A CRITICAL JOINT

The front stretcher is rabbetted and dovetailed to the legs and side aprons to help stabilize the case against racking forces. Begin by marking the shoulders of the rabbet with the case dry-assembled (top). Cut the stepped rabbet using a backsaw and chisels, then saw the dovetails (center). Set the stretcher in place and scribe for the dovetail housings in the leg and apron (bottom).

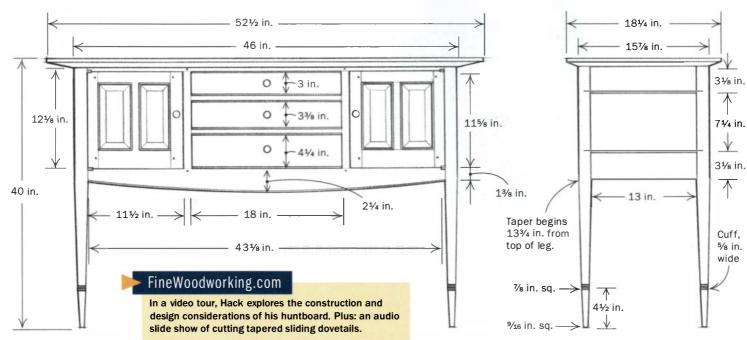

Glue up the case in stages



Attach the front rail to the bottom. Glue the spline into the bottom board, then add the front rail. Be sure all of the joinery lines up before clamping.



Glue the drawer stiles and dividers to the front rail. Assemble the stiles and dividers, then fit them into the front rail as a unit.



Slide in the interior partitions from the back. Glue will help the tapered pins slide. Clamp the partitions, then let the glue dry before going any further.



dadoes that house the banding using either a router or hand tools (for more on this process, see *FWW* #180, p. 106). Each section of banding is mitered using a 45° guide block and chisel; the block also is used to miter the door beading (see top right photo, p. 45). After the banding is glued in place, level the sections with a block plane, then plane a tapered toe from the cuff to the floor (see photos, p. 39).

Assemble the side and rear aprons

One of the most challenging aspects of this design is planning for the inevitable seasonal movement of the 13½-in.-wide aprons. Cherry boards that wide will move significantly, increasing the potential for cracking the case, opening a gap where they meet the top, and pinching a drawer or a door.

A simple and attractive solution is to make each apron in three parts: a top and bottom rail and a center panel, joined with cherry splines but no glue. The tenons of the rails are glued into the legs, while the stub tenons of the panel float in their mortises. As a decorative element, and to disguise small gaps that will open during the dry winter months, I cut beads in the center panel where it meets the rails (see bottom side rail detail, p. 40).

The most accurate way to cut the tenons and shoulders on the three parts of each apron is to dry-assemble them with the splines and cut them all at once, holding the pieces together with masking tape. Clean up the shoulders with a shoulder plane, then take apart the assembly and trim the center panel tenons down to ½ in. long. Now, cut the miters and haunches in the longer tenons of the rails. Finally, cut a groove in the bottom rail to accept the tongue of the bottom board.

Fit the front rail and stretcher

When the aprons have been fitted, it's time to cut, shape, and fit the bottom front rail. Also, cut the slot in the rail for the spline that connects it to the bottom board, and scratch the bead along the bottom edge.

The front stretcher is dovetailed into the top of the front legs, and into the top of both side aprons just behind the legs (see photos, p. 41). For accuracy, dry-assemble the case and place the rail in position. Lay out the location of the shoulders and dovetails, and then cut them. Place the rail back in position, mark the dovetail



Add the top stretcher and kickers

With the case upright on the floor, install the stretcher. This is tricky because you have to glue in the kickers for the top drawer at the same time. The stiles of the drawer frame are tenoned into the stretcher. Drive wedges into the tenons, then screw the stretcher to the interior partitions.

housings, then rout and chop them out. Finally, cut the mortises for the two kickers of the top drawer into the back edge of the stretcher. Also, cut the mortises for the knife hinges in the stretcher and the bottom front rail (for more on installing knife hinges, see *FWW* #152, pp. 108-110).

Thick stock and solid joinery create a stiff structure

With a huntboard, it's possible that many heavy items will be stored in the drawers and compartments. To make the case quite stiff and sturdy, the bottom board and the




43

www.FineWoodworking.com NOVEMBER/DECEMBER 2006

Doors feature contrasting beading



Jig creates perfect bead stock. The jig is a piece of ½-in.-thick plywood with two fences spaced the width of a block plane. The plane rides on identical shims, ensuring uniform thickness. A brad in front of the beading holds it in place.

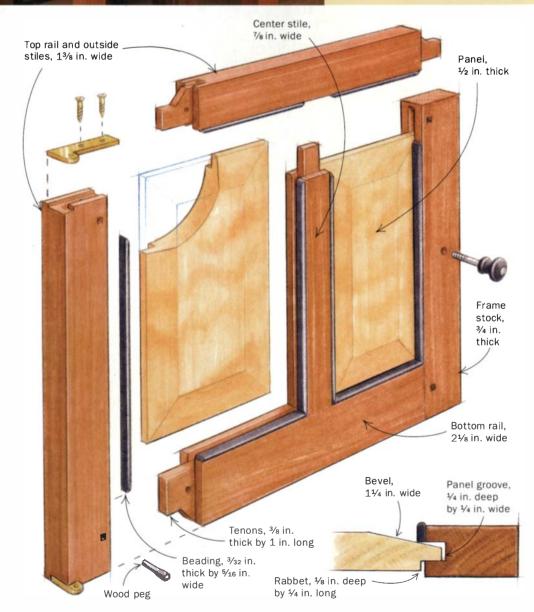

top are thick, and strong joinery in the face frame and interior partitions helps tie the top and bottom together.

The face frame and the drawer runners and dividers are joined with mortises and tenons while the interior partitions connect to the bottom board with sliding tapered dovetails (the slots and pins are wider at the back and narrower toward the front). Tapered dovetails ease assembly but still provide a strong mechanical joint.

To cut the dovetail slots in the bottom board, dry-fit the face-frame assembly and the bottom rail. Connect the bottom board with the spline and mark out the dovetail-slot locations. Remove the bottom board and cut the slots. Clamp a fence to the board and remove most of the waste with a straight bit. Then finish with a 5/8-in. dovetail bit. Taper the slot by shifting one end of the fence over by about 1/16 in. and then running the dovetail bit through the cut again.

Use a router table when cutting the dovetail pins in the partitions. Be sure to leave the partitions long for now, as trial and error is the only way to set the pin cut for a perfect sliding fit. I use a side rabbeting plane to taper the pins to fit, though you also could use a paring chisel.

Build doors and drawers after glue-up

When all the partitions have been cut and fitted, dry-assemble the piece, then lay out and cut the slots in the partition and side



Glue the beading to the frame. The beading should be proud of the outside of the frame. Use plenty of clamps and a caul to ensure a good bond.

apron for the shelf that's tucked behind one door. Also, lay out and cut all the mortises for the buttons that secure the top, as well as the mortises in the rear apron for the two top-drawer kickers. Once you're sure everything is fitting nicely, get ready for the glue-up.

There are a lot of pieces to put together here, so to make the job easier, assemble the case in steps (see photos, pp. 42-43). After the case is glued up, cut the top to final dimensions, shape the underbeveled edge, and secure it in place with buttons and screws.

Finally, after building the doors (see photos and drawings, this spread), assembling the drawers, and turning and installing the knobs, the piece is ready for finishing.

Nothing beats the dazzle of shellac


To bring out the rich color of the cherry, I started with a light coat of oil/varnish. Once dry, I padded on many layers of orange shellac (1-lb. cut) using a clean cotton rubber, rubbing it out between coats with 0000 steel wool. A final "ghosting" with a rag with just vapors of alcohol leaves a beautifully smooth finish. A topcoat of wax is the final and renewable protective finish.

Garrett Hack is a contributing editor.
Past articles and full-size plans are available at FineWoodworking.com.



Simple jig for perfect miters. Clamp a 45° guide block to the frame members and chop the beading to length.





Scratch the bead. Run a simple scratch stock along the beading. You're done when the cutter just starts to bite into the frame.



Cut the panel grooves, then assemble the door. Cutting the grooves after the beading is applied ensures a flush fit between panel and beading. Trim the horns after the glue dries.

Waterborne Finishes Come of Age

The best are now as good as or better than solvent finishes; the worst should still be avoided

BY CHRIS A. MINICK

hen Congress enacted the Clean Air Act of 1990, doomsayers predicted that oils and waxes would be the only options for wood finishing. Optimists said waterborne finishes would come to the rescue. But at the time, waterborne finishes were little more than latex paint without pigment; they were hard to apply, offered almost no protection, and looked bad.

Five years later I tested 15 waterborne finishes (FWW #115, pp. 48-53) and found that while they had improved, they were still far from equal to their solvent-based counterparts. Even so, waterborne finishes offer a package of benefits that no solventbased finish can match. They have far less odor than lacquers; they dry quicker than oils and oil-based varnishes; they offer more protection than shellac; and they can be sprayed safely without an explosion-proof booth.

So fast-forward another 11 years and it's time to look at waterborne wood finishes again. I purchased 13 readily available, clear waterborne finishes, from the hardware-store variety to those aimed at professionals, and subjected each finish to a battery of tests. What I found surprised me. In the three critical areas of


application, protection, and appearance, many of these waterborne finishes are every bit as good (or better, in some situations) as the solvent-based finishes I normally use in my shop. That's a bold statement, but here's how I came to that conclusion.

Whether sprayed or brushed, the finish must be easy to apply

The clarity of a particular waterborne finish or the protection it imparts to the wood matters little if you can't apply it without drips, runs, sags, or brush marks. I used a number of tests to evaluate the application characteristics of each finish. Some tests—viscosity and vertical sag-are industry standards; others-brushability, sandability, sprayability, and grain-raising—are of my own design.

Viscosity: Don't rush to thin a waterborne finish-With solvent finishes, viscosity usually has a direct effect on flow-out and leveling. Waterborne finishes are different. Most are thixotropic; that is, they have a high viscosity in the can but "thin out" when brushed or sprayed. While low-viscosity waterborne finishes will run off a vertical surface, that doesn't mean that ones with high viscosities and great resistance to sag are impossible to apply. Try



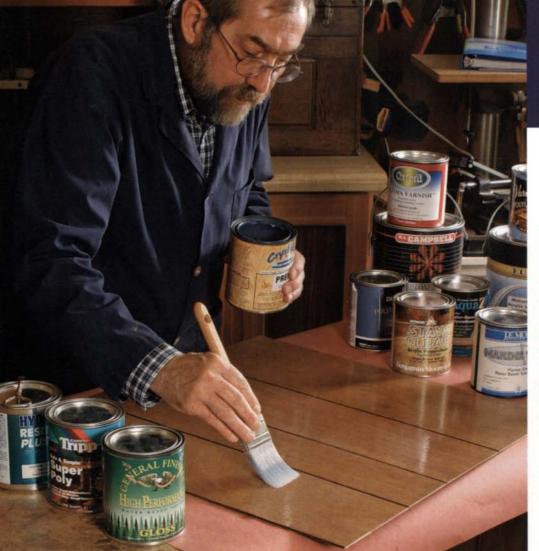

Testing for ease of application

Testing brushability. To get an initial feel for how each finish brushed, Minick applied a coat to a plywood panel using a synthetic-bristle brush.



See how they run. A notched drawdown bar applied strips of finish ranging from 3 mils to 12 mils in thickness. The test card was then hung up to dry and the thickest line that didn't sag or run was recorded. This gives an indication of how forgiving a finish will be if too thick a coat is applied to a vertical surface.

to brush or spray your waterborne finish straight from the can before you thin it—you may be surprised.

Vertical sag measures runs and drips—In this test, a notched drawdown bar applied 10 strips of finish that graduated in wetfinish thickness from 3 mils to 12 mils. The card was then hung in a vertical position and allowed to dry. The sag reading is simply the thickest strip that did not run or drip. Except for one, all the waterborne finishes had vertical sag values of 4 mils or greater. A typical brush coat is 3 to 4 mils thick, so runs and drips should not be a problem with most of these finishes.

Brushing and spraying properties varied widely—I brushed a coat of each finish onto a brush-out card, an industry-standard uniform surface used for testing finishes, and inspected it for brush marks and bubbles. A finish was rated excellent if it dried flat with no bubbles; good meant slight brush marks or a few bubbles; fair indicated a noticeable number of bubbles; and poor was an unacceptable amount of bubbles.

For the spraying test, I used a pressure-feed HVLP conversion gun to spray a 2-ft. by 3-ft. test board hung vertically on the back of my spray booth. Finishes were rated excellent if they sprayed like solvent lacquer; good if the dry finish had a few bubbles; fair if trapped micro-bubbles caused a slightly hazy finish; and poor if the dried finish looked like orange peel.

Grain-raising was not a problem—Waterborne finishes have a reputation for raising wood grain, so I took this opportunity to



Did the finish raise the grain?
Each panel was tested with a surface profilometer to measure its smoothness before and after the first coat of finish was applied. With most finishes, the grain-raising was insignificant.



The finish should sand easily.
Minick sanded the first coat of each finish with P180-grit no-load sandpaper. Good finishes powder with little effort.

www.FineWoodworking.com NOVEMBER/DECEMBER 2006 47

Testing for durability



find out. I borrowed a surface profilometer and used it to compare the roughness of oak plywood before and after one coat of finish had been applied. Even the worst result was fairly minimal, so it seems that waterborne finishes either have been unfairly stigmatized or have come a long way.

Some finishes sand easily, others clog the paper—No one likes to sand, but if a finish sands easily it makes the job less painful. Sanding the first coat with P180-grit, no-load paper, I rated a finish excellent if the finish powdered easily and the sandpaper didn't drag or clog; a good rating meant the finish still powdered up but sanding took a little more effort; fair finishes required a lot of muscle to sand and quickly caused clogging.

Each finish was cut, scratched, heated, and stained with food to test durability

To ensure an even playing field when testing the durability of each finish, I applied a uniform thickness to a homogeneous surface. I used 10-in. by 16-in. panels from a single sheet of ½-in.-thick oak plywood whose face was made from a single flitch of veneer. I stained half of each panel with a dark walnut, oil-based stain and allowed it to dry for two days before applying any finish.

I used an industry-standard Mayer rod to apply each coat of finish. This is a round stainless-steel bar wound tightly with stainless-steel wire. The diameter of the wire regulates the thickness of the coating; for this test I chose a wet-coating thickness of 3 mils. I applied three coats of finish to each panel and let it cure for three weeks. In addition to the waterborne panels, I prepared two control panels with solvent-based finishes: a profes-



sional self-catalyzed lacquer and a conventional brushing varnish. Note that all these tests were done with fresh cans of finish. Many woodworkers don't realize that a waterborne finish has a shelf life of about four years. The chemical additives slowly deactivate over time; warm storage conditions will hasten this deterioration. A sign that a waterborne finish is beyond its useful life is the formation of gelatinous stalactites on the underside of the lid or the rim.

A good finish must stick to the surface—To test each finish's ability to adhere to a surface, I made an X with a razor knife through the coating over the stained section of the panel, burnished a piece of high-tack packaging tape over the X, and then ripped off the tape. An excellent score meant no finish came off; fair meant finish loss of less than ½6 in. wide at the intersection of the cut, while a loss of more than ½6 in. rated poor. All the finishes except two had excellent adhesion.

Scratch the surface with a pencil—It may seem counterintuitive, but soft (elastic) finishes are generally more scratch-resistant than hard (brittle) finishes. When an object strikes a soft finish, the finish deforms slightly, then rebounds to its original shape; a brittle finish fractures, causing a scratch. However, a hard finish is a better choice if you want to rub out your finish to a high gloss.

I used a set of pencils ranging from a soft 6B to a hard 6H. I held each pencil at a 45° angle to the surface and pushed it across. Pencils softer than the coating skated along without scratching; pencils harder than the coating dug into it.


Neither heat nor food should mar the finish—I patterned the food-stain test on the one used by the Kitchen Cabinet Manufacturers Association. I placed a dollop of 10 foods on each test



Can't stand the heat. Minick placed a steel nut, heated in boiling water, on each test panel and evaluated the results after 24 hours. Most finishes survived unscathed; Moser's Simple Success simply failed.



Spilled food, spoiled finishes. Ten different foods and drinks were applied to each panel to see if they marred the finish. Most finishes coped well, but mustard left a stain on many panels.

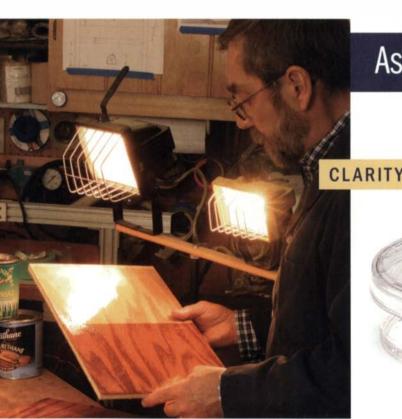

A clear finish. Each panel was examined under a halogen light for color and clarity. Only a few finishes exhibited the bluish cast that was once the trademark of waterborne finishes.

Assessing the appearance



Waterborne finishes can add color. Some of the finishes, such as Hydrocote Resisthane Plus, dried clear. Others, such as M.L. Campbell Ultrastar, added a touch of yellow, while J.E. Moser's Marine Shield was dark yellow.



Comparing the finishes Every finish was tested first for ease of application, by brush or spray gun. The dried finish was then evaluated for its appearance, and finally subjected to a series of assaults to test its durability.

FineWoodworking.com

Visit our Web site for in-depth results of Minick's finish test.

panel, then after 24 hours washed the panel clean, dried it, and graded it. I awarded two points if the finish was undamaged, one point if the finish needed buffing to remove the stain, and no points if I observed permanent damage.

The Fuhr 355 and M.L. Campbell's Ultrastar scored a perfect 20 points with the rest of the pack close behind. This is a pretty tough test, so any of these finishes would be fine on a well-cared-for dining table.

For the heat-resistance test I boiled a bunch of ¾-in. galvanized steel nuts in water for five minutes and then immediately placed one on each panel. After 24 hours I inspected the panels and assigned a rating of excellent for no damage, good for slight damage that could be buffed out, and poor for permanent damage.

Clarity and color determine a	finish's appearance
-------------------------------	---------------------

The application and protection properties of a finish are meaningless if it looks bad on the wood. Waterborne finishes have a reputation for having a hazy, almost bluish appearance, especially when applied over a dark stain. However, most of the finishes tested were completely transparent. A few were slightly hazy but looked fine under normal lighting conditions, but J.E. Moser's Simple Success had a distinct bluish haze that I found objectionable.

Finish Brand	Source	\$ gallon/ quart
AQUAZAR WATER-BASED POLYURETHANE	Dealer locator: www.ugl.com	53/20
BENWOOD FINISHES STAYS CLEAR	Dealer locator: www.benjaminmoore.com	45/15
CRYSTALAC PREMIUM GLOSS	McFeely's; www.mcfeelys.com	42/17
FUHR 355 ACRYLIC VARNISH	Homestead Finishing; www.homesteadfinishing.com	39/19
BEST OVERALL GENERAL FINISHES HIGH PERFORMANCE	Rockler; www.rockler.com	63/26
BEST VALUE HYDROCOTE RESISTHANE PLUS	Hood Finishing Products; www.hoodfinishing.com	20/9
J.E. MOSER'S MARINE SHIELD	Woodworker's Supply; www.woodworker.com	70/25
J.E. MOSER'S SIMPLE SUCCESS	Woodworker's Supply; www.woodworker.com	45/18
MINWAX POLYCRYLIC	Hardware store or home center	43/15
M.L. CAMPBELL ULTRASTAR	Dealer locator: www.mlcampbell.com	34/8*
OLYMPIC POLYURETHANE	Lowes; www.lowes.com	40/16
OXFORD ULTIMA BRUSHING VARNISH	Homestead Finishing; www.homesteadfinishing.com	58/22
VARATHANE DIAMOND POLYURETHANE	Dealer locator: www.woodanswers.com	48/19
CONTROL GROUP		Librar
MINWAX FAST-DRYING POLYURETHANE	Hardware store or home center	25/9
ML CAMPBELL MAGNAMAX	Dealer locator: www.mlcampbell.com	42/10*
*Available in gallon only. Quart price equals ¼ of gallon price.		

Available in gallon only. Quart price equals ¼ of gallon price.

How waterborne finishes color the wood—Conventional wisdom in woodworking circles is that waterborne finishes are completely colorless. While that is true for some brands, it is far from universal. When I measured the color of each finish with a laboratory spectrophotometer, I found that about half had an amber tint reminiscent of nitrocellulose lacquer.

The contrast between the clearest finish (Hydrocote Resisthane Plus, color index 1.35) and the yellowest (J.E. Moser's Marine Shield, color index 27.34) is obvious on maple but barely detectable on dark Peruvian walnut. However, I was shocked when the same two finishes turned cherry a dark gray/green color.









APPLICATION				DURA			APPEA	RANCE	
Vertical Sag	Brush	Spray	Sand	Adhesion	Hardness	Food Stain Resistance	Heat Resistance	Clarity	Color
Fair	Poor	Poor	Good	Excellent	Very soft	Good	Good	Slightly hazy	Clear
Excellent	Fair	Excellent **	Fair	Excellent	Soft	Good	Good	Slightly hazy	Yellow
Excellent	Good	Good **	Excellent	Excellent	Medium	Good	Good	Transparent	Clear
Excellent	Poor	Excellent	Excellent	Excellent	Medium	Excellent	Excellent	Transparent	Clear
Good	Excellent	Excellent **	Excellent	Excellent	Medium	Good	Poor	Transparent	Light yellow
Excellent	Excellent	Excellent	Good	Excellent	Medium	Good	Good	Transparent	Clear
Good	Excellent	Excellent	Good	Fair	Very soft	Good	Excellent	Transparent	Dark yellow
Poor	Excellent	Fair	Fair	Poor	Soft	Good	Poor	Very hazy	Light yellow
Fair	Fair	Good	Good	Excellent	Very soft	Good	Poor	Transparent	Clear
Fair	Poor	Excellent	Excellent	Excellent	Medium	Excellent	Excellent	Transparent	Yellow
Good	Good	Excellent **	Good	Excellent	Medium	Good	Good	Transparent	Clear
Excellent	Good	Excellent	Good	Excellent	Medium	Good	Good	Slightly hazy	Light yellow
Fair	Poor	Good	Excellent	Excellent	Soft	Good	Good	Transparent	Clear
- 10 C	18 JE 74	15 7 5	THE REAL PROPERTY.					WEST-	THE PARTY OF
Poor	Excellent	Excellent	Fair	Excellent	Verysoft	Excellent	Excellent	Transparent	Dark yellow
Fair	Excellent	Excellent	Excellent	Excellent	Medium	Excellent	Excellent	Transparent	Yellow

^{**}Thinning of no more than 15% needed to achieve good atomization.

This color change is caused by a waterborne finish's chemical makeup rather than the color of its resin. Waterborne finishes must be alkaline to remain stable in the can, and alkaline materials can change the color of some woods. If you don't like the appearance of a finished sample, wipe the bare wood with a sealer coat of wax-free shellac; it will act as a barrier to the waterborne finish and will prevent chemical discoloration.

Picking the winners

In a strong field, I liked the Oxford Ultima Varnish and J.E. Moser's Marine Shield because both applied clear rather than

milky white. But my choice for best-overall finish goes to the General Finishes High Performance product. This finish was a dream to work with: It brushed and sprayed easily, it dried flat, it had great protection except from heat, and it looked good. It has everything you could ask for in a finish except for price. At \$26 per quart, the General Finishes product is a bit on the expensive side, so I chose Hydrocote Resisthane Plus as the best value. Not only does Hydrocote offer a truly clear coat, but it's also a steal at \$9 a quart.

Chris A. Minick is a consulting editor.

Fresh Take on Tabletops

With a center gap for expansion, the design options multiply

BY DOUG STOWE

few years ago, I attended a family reunion at a state park in Tennessee. As a woodworker, I couldn't help noticing that the cabins in the park had solid-oak tables made with breadboard ends. The breadboard ends kept the tabletops flat and covered the end grain, giving a more refined look. I also noticed a common problem: The humidity had caused the top to expand so that it extended 3/8 in. on both sides of the breadboards.

Breadboard ends have an annoying design quirk related to humidity and wood movement. As humidity changes, a board expands and contracts in width. That same humidity, however, has no significant effect on the board's length. And that's the problem. When a table is built, the edges of the top often are made flush with the ends of the breadboards. During summer, when humidity is high, the top absorbs moisture and gets wider, but the breadboard ends stay the same length. As a result, some of the top's end-grain begins to show. In the winter, when humidity is low, especially in heated homes, the top gets narrower as it dries and the breadboard ends stick out.



Center gap solves a problem

At the same reunion, an aunt, wanting to encourage my woodworking career, asked me to design and build her a table. With the cabin tabletop issue fresh in my mind, I began to consider other ways to address the challenges presented by the expansion and contraction of wood.

Inspired to think outside the box, I decided to make the top

with a narrow center board separated slightly from the other boards to create a pair of end-to-end gaps. With the top attached to the breadboards only at the outside ends, the gaps allow the wood to expand and contract at the center of the table. That means the overall width of the top doesn't change, and the edges of the top and the ends of the breadboards stay perfectly flush. The center board added a unique and interesting look to the table.

Since then, I've used a center-gap concept in several tables and even a bench. In some, I inlaid small, flat stones to add texture and visual interest (see photos, p. 55).

Having a center gap and fixed edges on the tabletop also affects what you can do with the base. For a bench made from curly maple (see photo and drawing, right), the center gap helps in a slightly different way. Without it, the top ends of the legs would



Expansion in a normal top would cause this base to flex.




CONNECT A TABLETOP RIGIDLY TO A BASE

Thanks to the center-gap design, Stowe can dovetail the ends of the legs into the benchtop without danger of flexing the base.

> With a center gap, expansion is directed inward and the base doesn't flex.




KEEP BREADBOARD ENDS FLUSH

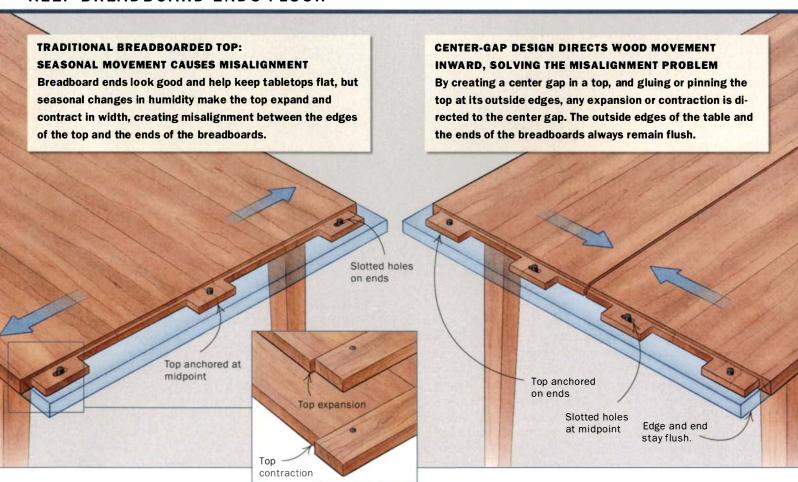

ADD VISUAL INTEREST TO TABLETOPS: THREE WAYS



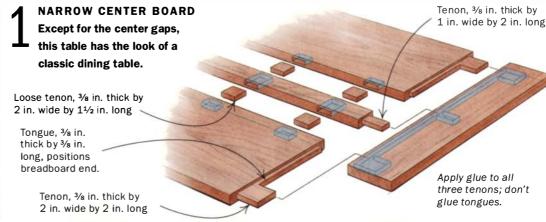



flex. Eventually, such flexing would cause the leg rails to loosen. The center gap eliminates the problem.

Inlaid stones add detail and texture

Natural materials like wood and stone work wonderfully together. That's why I sometimes inlay a few shallow, flat stones in tabletops that incorporate my gap technique. The stones stand just slightly proud of the surface. It's a pretty straightforward technique, yet it adds considerably to the warmth and character of the top.


Arrange the stones on the top in a manner that pleases your eye. Then use a pencil to trace the perimeter of each stone on the top. To help when it's time to relocate the stones later, label each stone and matching perimeter with identical numbers. Use a

carving gouge to remove material under each stone. Don't worry much if the match isn't perfect; the glue fills in any gaps.

Apply a generous amount of two-party epoxy to a cutout. Place the mating stone in the cutout and press firmly. Repeat for each stone. Sometimes I extend a stone across the gap. In that case, make sure the stone is glued to one side of the gap only. If both sides are glued, the movement at the gap would surely cause something to crack, probably the epoxy joint. Also, when carving, be sure to create a little clearance around the perimeter of the unglued portion of the stone. That way, when the top expands, the stone won't jam against the edge of the recess.

Doug Stowe is a furniture maker in Eureka Springs, Ark.

2 INLAID STONES
By adding stones to the center gap,
Stowe blends two natural materials to
create a whimsical detail.

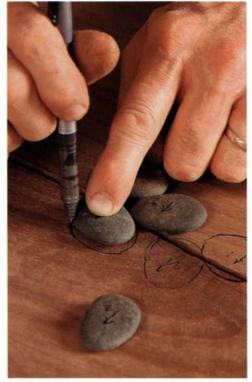

Lay out the stones. Stowe begins the inlaying process by positioning the stones and then tracing their outline.





Remove the waste stock. A carving gouge pares stock as needed so that each stone can be inlaid to about one-half its thickness.




Glue the stones in place. A two-part epoxy bonds the stones securely to the top. Stones that span the gap are glued to one side only.



A BED OF STONES

Stowe sometimes opens up a portion of the gap and arranges loose stones to fill the opening. He adds a plywood board with solid-wood edging to the underside of the top to support the stones. To allow for wood movement, the board is attached on one side only.

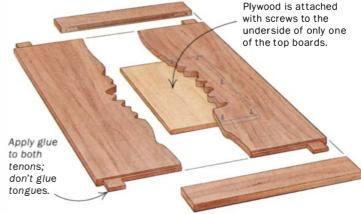



Many joints are possible

These samples provide an overview of the many joints and configurations possible with dovetall jigs. Other joints are possible, and the spacing options are endless. We used the shorthand listed below each sample to denote the basic joints each jig can produce.



THROUGH DOVETAILS (T)



HALF-BLIND DOVETAILS (HB)



VARIABLY SPACED
THROUGH DOVETAILS (VT)

ovetail Jigs

All can make precise joints—but the best do it easily

BY TIM ALBERS

o many woodworkers, a clean and snugfitting row of dovetails is the hallmark of craftsmanship (hence the logo of this magazine). This is probably why you'll find more than 20 dovetail jigs on the market, each promising to turn a time-consuming process into a few foolproof passes with a router.

Like politicians, these jigs are either loved or hated and everyone seems to have an opinion about them. To see for myself, I gathered 15 of the most versatile jigs for a thorough test.

The only jigs I didn't test are the most basic models, which cut only half-blind dovetails, on stock 12 in. wide or less, with fixed spacing. These are covered by Fred Sotcher in a Web-only article, available free on FineWoodworking.com.

How they stack up

First, every one of these jigs can produce a snug and accurate dovetail joint. The factors that separate them are the diversity of joints they can create, the width of workpieces they can handle, and the setup and adjustment time they require. The best jigs offer a good balance between versatility and learning curve.

I was impressed with a number of these jigs. Though a router bit can't create the very slender spaces between tails associated with hand-cut joints, a good dovetail jig will turn out a stack of boxes in an hour, and many offer variable spacing for more attractive results.

For the best-overall award, the Leigh D4R comes out on top. It can do it all and do it quickly. The Akeda is another great jig, but not quite as versatile. Even with the D4R, I'd be tempted to add a Keller and/or Gifkins jig: the Keller for larger work and the Gifkins for small boxes. These offer unmatched simplicity and efficiency.

For best value, I recommend the Porter-Cable 4212. While only 12 in. wide, it offers a remarkable combination of price, options, and ease of use.

Tim Albers is a woodworker in Ventura, Calif., and a frequent contributor.



VARIABLY SPACED HALF-BLIND DOVETAILS (VHB)



SLIDING DOVETAILS (S)



BOX JOINTS (B)



ISOLOC (I)

Leigh jigs are fast and versatile



LEIGH D4R AND D1600

Source: www.leighiigs.com

Street prices: \$476 (D4R, shown); \$340

(D1600)

Thickness capacity: 1/8 in. to 11/2 in.

Width capacity: 24 in. (D4R); 16 in. (D1600)

Variable spacing: Yes

Templates included: VT, VHB, S

Accessories available: I, B, dust port

Instructions: Excellent Learning curve: Fair Ease of setup: Very good Ease of use: Very good

he Leigh jigs are built around a solid aluminum base unit, with quick and solid clamps, and a single ingenious template that produces both throughand half-blind dovetails with variable spacing, as well as sliding dovetails. The jig comes with the cutters and guide bush-

ings for these joints.

Complexity is the tradeoff with such a versatile jig. While the manual is the most clear and

comprehensive woodworking equipment manual I have seen, it still took me about a half-day to master the basic joints. However, once I understood the basic jig,

terminology, and marking system, I was able to cut a variety of joints very quickly. Diagrams on the jig itself act as helpful reminders.

The key to the Leigh design is the sliding template fingers, which allow beautiful dovetail configurations to be arranged by eye, with the fingers always locking down level and straight.

The shorter Leigh D1600 (not shown) is a great value, offering all of the features of the D4R except adjustable pin size, a feature I consider insignificant.



One template does all. This clever template does both through- and half-blind dovetails, with variable spacing that is easy

The Porter-Cable is a bargain



PORTER-CABLE 4212

Source: www.portercable.com

Street price: \$150

Thickness capacity: 1/4 in. to 11/8 in.

Width capacity: 12 in. Variable spacing: No Templates included: HB. T Accessories available: None Instructions: Very good Learning curve: Easy

Ease of setup: Very good

Ease of use: Excellent

orter-Cable's 4200-series jigs contain some new features that make setup and use very easy. For my evaluation, I used the 4212. The 4210 has a lower price but cuts only half-blind joints.

went smoothly, though the instruction manual could be better. Very helpful are the additional setup lines and instructions etched onto the templates themselves. The jig is also the only one to include built-in gauges for setting the router-bit height. The jig comes with 1/2-in-dia.-shank router bits, which reduce vibration (most others use 1/4-in. bits).

After using the jig a few times with the help of the information on the templates, it becomes pretty intuitive, and switching between templates, joints, and different-size boards goes quickly. At an average street price of \$150, this jig is a real bargain.





Flip and continue. For through-dovetails, once the tails are cut the template is simply flipped over to cut perfect pins.



Helpful guide lines. The templates have scribe marks that are aligned easily with the back of the tail board, making setup fast.



Another unique guide. The Porter-Cable is the only jig with built-in guides for setting bit depth. Instructions on the jig mean fewer trips to the manual.

AKEDA DC16

Source: www.woodcraft.com **Street price:** \$350, plus router bits (\$450 as tested)

Thickness capacity: 1/4 in. to 1 in. (pin board max is 3/4 in.)

Width capacity: 16 in. Variable spacing: Yes

Templates included: VT, VHB, S

Accessories available: Router bits, dust port, various-sized

fingers

Instructions: Excellent
Learning curve: Easy
Ease of setup: Very good
Ease of use: Very good

The Akeda jig
truly is a new approach to
cutting dovetail joints—and
a successful one. If it were
24 in. wide, it would give the
Leigh D4R tough competition
for the best-overall award.

The Akeda comes completely assembled, and setup is a snap. The jig is calibrated at the factory and no adjustments are needed. Within 30 minutes I had read through the excellent instruc-


tions and made a precise, finished joint with variable spacing.

The Akeda's uniqueness comes from its boxlike design, which employs movable guide fingers that snap into a guide rail at ½-in. increments. The tails are cut first; then the tail fingers are replaced by tapered pin fingers. The clamping bars are simple and fast to adjust—one of the best designs of any jig. They require only one knob, with an internal gear system keeping pressure even.

The Akeda bits are not a standard size, so I'd keep a few extras on hand in case one breaks.



Design advantages. The Akeda jig's boxlike design offers better router support than other jigs, and with an accessory port, much better dust collection.



Good old pencil marks.After cutting the tails, you mark the jig at the centerline of each template finger and then align the pin fingers with those marks.



FESTOOL VS-600

Source: www.festoolusa.com Street price: \$300, \$390 with basic templates

Thickness capacity: 5/8 to

11/8 in.

Width capacity: 241/2 in. Variable spacing: No

Templates included: None

Accessories available: T, HB, S, B, doweling jig, router bits,

dust port

Instructions: Fair Learning curve: Difficult

Ease of setup: Fair Ease of use: Good

he Festool is a versatile jig capable of dovetails, box joints, and even shelf-support holes and dowel joints. It also has very solid clamping bars with a third knob in the middle for narrow stock. Adjusted front-to-back, the templates are the only ones that hold their settings when removed from the iig. The iig must be used with a Festool router, but these come with a tapered pin that makes installing the guide bushing a breeze, and the 8-mm-dia. Festool bits are

stiffer than the 1/4-in. competition.

However, the jig's design is troublesome. Because it uses a special guide bushing with a lipped collar, the stock can't be pushed flush against the template. This makes it harder to align the template with the work or to align two boards when cutting half-blinds. And the long, thin templates tended to flex under the weight of the router, or bow on top of narrow boards. Last, the jig is only the base unit; you must buy bits and at least one template to cut a joint. Add the router and the price approaches \$800.



These templates remember. The Festool templates retain their front-to-back settings when removed from the jig.



Got three hands? Because the workpieces don't touch the template, you must go by feel when aligning two boards-tough while holding the workpiece and tightening a clamp.

HART DESIGN GFK1800

Source: www.hartvilletool.com

Street price: \$150

Thickness capacity: 1/16 in. to

1 in.

Width capacity: 18 in. Variable spacing: No

Templates included: HB Accessories available: T,

small HB

Instructions: Very good Learning curve: Fair Ease of setup: Very good

Ease of use: Good

he Hart jig, model GFK1800, is especially large, well-designed, and well-made for a lower-priced, half-blind jig. The initial setup and adjustment took only 30 minutes. I recommend the simple but effective setup gauge (\$10), which aligns the side guides and template and sets the bit height. Cam-style clamp levers (\$20) are also a helpful upgrade.


As with all half-blind jigs, the template supports only

slightly more than half of the router base, so care must be taken to prevent the router from tipping.

CHARLES CONTRACTOR OF THE PARTY OF THE PARTY

The Hart jig also offers templates for through-dovetalls—one each for pins and tails. Unfortunately, each time a template is changed, it must be set up and adjusted for accurate results.

The Hart 18-in. jig is a solid performer. A 12-in. model is \$100, and includes a free setup gauge.



Good capacity in a basic jig. The Hart's 18-in. capacity means it will produce deeper boxes and cases than the other low-priced jigs.



Handy alignment guide. Like the rest of the jig, the small, optional guide that aligns the side stops is simple but effective.



Porter-Cable's flagship Street prices: \$400 (7216); dovetail machine for many years. In fact, the entire jig is Thickness capacity: 1/2 in. to being radically redesigned, with the new version set for Width capacity: 24 in. (7216): a January 2007 release. We'll review it in a future issue. Variable spacing: Yes The existing version is the Templates included: HB, VT heaviest and most solid of Accessories available: Small any of the jigs we evaluated (the 7216 weighs in at 60 lb.). Instructions: Good Both existing models come Learning curve: Fair with a half-blind template, Ease of setup: Fair a router bit, and a template Ease of use: Fair guide bushing. A special offer

on the 24-in. model includes a

variably spaced through-template.


\$300 (5116)

16 in. (5116)

HB, VT, B

The Omnijigs arrive assembled with only minor adjustment necessary. The instructions are simple and straightforward, and a good video is included. The solid-steel, cam-action clamping bars have no flex, but to adjust them for different thicknesses you have to reach awkwardly under the jig.

The half-blind templates work well. But on the one for variably spaced through-dovetails, the T-shaped handle on each finger can get in the way of the router above and the workpiece below. Also, it's easy to tighten down the fingers in a slanted position.



Fickle fingers. The poor design of the T-shaped clamp handles on each finger means that the template must be raised above the workpiece to align the fingers, making layout less accurate. Also the fingers don't stay level when they are adjusted.

ROCKLER DOVETAIL **JIG COMBO 23882**

Source: www.rockler.com

Street price: \$140

Thickness capacity: 1/2 in. to

11/4 in. (3/4 in. on T)

Width capacity: 11 in. Variable spacing: No

Templates included: HB. T

Bits included: Yes

Accessories available: None

Instructions: Very good

Learning curve: Fair Ease of setup: Good

Ease of use: Fair

he Rockier Dovetail Jig Combo is a basic halfblind dovetail fixture with the addition of a throughdovetail template. The jig comes equipped with everything necessary to make either joint. The base unit is made from stamped steel and a fair amount of plastic, including the halfblind template.

The initial setup goes quickly, as the instructions are clear and the jig comes mostly assembled. The

clamping bars are solid, and large adjustment knobs make coarse adjustments very quick. The cam-action clamps work very well.

But the jig's overall design is problematic. Unlike the others, the Rockier template is stationary, and a separate fence limits the rearward travel of the router base. This requires too much math and test-fitting to arrive at a snug, flush joint-especially when switching from one type of joint to another.





Adjustments are a chore. This jig uses a rear fence to stop the back of the router base. This means both template and fence must be adjusted for each new workpiece or joint, and math is necessary.



WOODHAVEN 7517K

Source: www.woodhaven.com

Street price: \$362

Thickness capacity: 3/8 in. to

1 in.

Width capacity: 12 in. Variable spacing: No

Templates included: T, HB

Accessories available: B,

small HB

Instructions: Good Learning curve: Fair Ease of setup: Fair Ease of use: Good The standard Woodhaven jig (model 7500; \$207) is a half-blind jig with fixed spacing. This review covers more versatile jigs, so I ordered the Woodhaven with its optional through-dovetail template and bits—actually a copy of the Keller Journeyman template.


In its basic configuration, this is a solid half-blind jig that uses bearing-guided bits, an advantage over jigs that use fussier template guide bushings. The clamping bars have

slots so that clamps can be moved next to the stock to prevent flex in the bars. The jig can be used upside down on a router table. I also liked the speedier, optional Kamtite clamps (shown).

On the downside, the Woodhaven comes in many parts and takes time to assemble. The side guides are different for various dovetails and must be changed out. The outrigger support arm for the router was more trouble than it was worth. Last, I preferred using the Keller through-dovetail system on its own (see Keller review); its versatility is limited in the Woodhaven jig.



Movable clamps. These can be snugged up to the sides of the workpiece for even pressure.



Lots of parts. The side guides are different for different dovetails, adding a step during changeovers. This jig also requires the most assembly.

Clamp-on jigs are easiest

Three jigs are a different breed: They are portable templates that clamp on to the workpiece. All use bearing-guided router bits, which tend to be more accurate than template guides. Better yet, after initial setup, these jigs handle stock of varying thickness with no



Sources: www.gifkins.com.au (info); www.japanwoodworker .com (purchase)

Street price: \$220

Thickness capacity: 1/8 in. to

7/8 in

Width capacity: 12 in. Variable spacing: No Templates included: T

Accessories available: T, for

other spacings

Instructions: Excellent
Learning curve: Easy
Ease of setup: Very good
Ease of use: Excellent

The Gifkins dovetail jig comes standard with a backer-board assembly and one phenolic template of the buyer's choice. The pin and tail boards are mounted at the same time on opposite sides of the fence, and aligned with a very precise and stable stop. A variety of optional templates can be purchased for different dovetail sizes and spacings.

The instruction booklet for this jig is one of the best, though all dimensions are metric. The jig was ready to use

right out of the box, aside from a one-time adjustment to the shims used on the pin side of the backer board.

The Gifkins jig is intuitive, remarkably fast to use, and especially suited for the router table.



Shim once; done forever. The Gifkins jig provides thin shims for fine-tuning the fit of the pins. As with all clamp-on jigs, you'll only have to do this once.

Router-table technique. All of the clamp-on jigs will work on the router table, but the Gifkins is especially stable there.



adjustment. They can't cut half-blind dovetails but are versatile in other ways: Variable spacing and wider workpieces are handled by sliding the template along the workpiece and/or skipping pins. Wedge-shaped shims will allow the jigs to cut dovetails at an angle.



Source: www.katiejig.com
Street price: \$270

Thickness capacity: 1/8 in. to 3/4 in. (tail board, 1 in.)

Width capacity: 12 in.
Variable spacing: Yes
Templates included: VT


Accessories available: None

Instructions: Good
Learning curve: Fair
Ease of setup: Good
Ease of use: Very good

The Katie is the only clampon jig with true variable spacing. However, the movable finger assemblies require a bit more setup than the fixed models, partly because there is play in the finger assemblies when loosened.

I found this jig easier to use upright, with a handheld router. There are optional handles available for controlling the jig on a router table, but they are too close to the

clamp handles, and the one interferes with the other. Also, due to the variable spacing, the backer board gets eaten away more quickly than similar models, and tearout becomes a problem.



Variable spacing, at a price. While this is the only clamp-on jig with movable template fingers, they have slop in their fit. To align them correctly, push each one against the mounting bar when securing it.

KELLER PRO SERIES

Source: www.kellerdovetail

.com

Street prices: \$250 (1601); \$340 (2401); \$440 (3600)

Thickness capacity: $\frac{1}{8}$ in. to $\frac{3}{4}$ in. (tail board, up to 1 in.)

Width capacity: 16 in., 24 in.,

or 36 in.

Variable spacing: No Templates included: T

Accessories available: None


Instructions: Very good Learning curve: Easy Ease of setup: Very good


Ease of use: Excellent

he Keller Pro Series jigs are simply aluminum templates (with bits included) that come in pairs (for pins and tails) and are supplied in three sizes, all longer and thus more versatile than the other clamp-on jigs. The templates are mounted on shopmade backer boards. There's a lessexpensive Journeyman system made from phenolic resin that comes in two sizes, 15 in. (\$150) and 22 in. (\$220). These combine the tails and pins on one template, requiring the user to make just one backer board.

As with all clamp-on jigs, test cuts are needed at the very beginning to adjust the pins' template on its backer board, but on the Keller a helpful scribe line gets you close. (Quick tip: Before flipping over or replacing a chewed-up backer board, clamp another board to the template to record the correct position.) The system is very easy to use: The tails are cut first, and then the tail board is used to register the pin board. Just clamp on stop blocks for repetitive work.

The 16-in. length might be all you need. It is more affordable, yet because it can be slid along the workpiece, with careful layout it will handle the deepest blanket chest.





Low-tech but effective. After cutting the tails, use that workpiece to lay out the first pin on the mating piece (left). Then you can align the pins' template quickly and accurately (right). Clamp a stop block on each jig to lock in the side-to-side workpiece alignment.

9

Reasons to Own a Shoulder Plane



Fine-tune your joinery with these tips and techniques

BY CHRIS GOCHNOUR

It's easy to dismiss the shoulder plane as a "specialty" plane, another way of saying it has limited use in most shops. But that has not been my experience. I use this tool almost every day in my furniture-making shop. When I teach woodworking and show students what the shoulder plane can do, it quickly becomes the most borrowed tool from my tool chest.

Early in its history, the shoulder plane was used most often to plane the shoulders of hand-cut tenons, hence its name. The blade is bedded at a low angle, with the bevel facing up, making it well-suited for planing end grain. It can be used one- or two-handed.

What really sets the shoulder plane apart from other handplanes is its narrow body profile, with the sole precisely milled square to its side and a blade that spans ever-so-slightly beyond the full width of the sole (see drawings, facing page). That means the blade is sure to cut fully into a corner without producing an unsightly cut line. Granted, you can use a chisel to get into a corner, but a shoulder plane does it faster with more control. Because the side of the plane and the sole are square to each other, each face of the corner remains square. Also, compared to a chisel, the plane makes it easier to keep the surfaces perfectly flat.

I reach for my shoulder plane all the time. Indeed, when making a wall cabinet recently, I used the plane in nine different places. For many of these tasks, the shoulder plane simply is the best tool for the job. The following pages illustrate some of the more common ways I put a shoulder plane work. No doubt there are other applications as well.

Chris Gochnour builds furniture and teaches furniture making in Murray, Utah.

1 Trim tenon cheeks to fit

Perhaps the task where I use a shoulder plane the most is fine-tuning the fit of tenons to their respective mortises. I use machinery to cut the tenons. But I don't aim for a perfect fit from the machines, mainly because there are enough slight variables in the process to make perfection hit or miss. Instead, I use the machines to produce a very tight fit. Then, when it's time to dry-assemble the parts, I use the shoulder plane to shave each tenon cheek. This gives me complete control, and I end up with a perfect fit every time.


Before starting, set the plane for a very light cut.

Check to make sure the blade is parallel with the sole of the plane. Plane across the grain, taking light passes. If the tenon is longer than the plane is wide, use slightly overlapping passes, starting at the shoulder and working toward the tenon end.

Be sure to plane the same amount from both cheeks. If you don't, the position of the tenon relative to the face surfaces of the workpiece will change slightly, and the face surfaces of the mating parts won't be perfectly flush when assembled.

There's another advantage to starting with a tight fit. If, during dry-assembly, I discover any misalignment of the face surfaces of the mating parts, I can make a correction. This is done by identifying where the joint is misaligned and planing one cheek of the tenon until the misalignment is corrected.

While I'm at it, I use the plane to chamfer the tenon end. This helps reduce the amount of glue that gets scraped to the bottom of the mortise during glue-up.

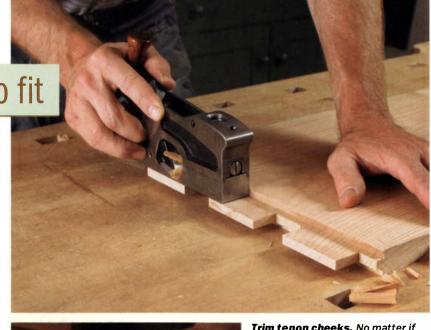




Trim tenon cheeks. No matter if the workpiece is narrow or wide, a few light passes with the shoulder plane on each tenon cheek will transform a tight-fitting joint into one that fits perfectly.

2. On tenons longer than the plane is wide, each additional pass with the plane should slightly overlap the previous pass.

3. To keep the tenon centered, remove the same amount of wood from each tenon cheek.






Set the blade extension

A shoulder plane needs to be sharp and well-tuned. The tuning process involves several steps; one of them making sure that the side edges of the blade extend about 0.002 in. beyond the sides of the plane. Gochnour uses two sheets of paper to establish that distance. The paper goes on a flat surface with a narrow piece of 400-grit sandpaper in between. Then, with the edge of the blade on the sandpaper, and the front and back of the plane resting on the paper, he slides the plane back and forth to sand down the edge. When the sandpaper stops cutting, the blade extension will be spot-on.

FineWoodworking.com

Visit our Web site to watch Gochnour tune up a shoulder plane from start to finish.



2 Refine tenon shoulders

Traditionally, tenon shoulders were cut with a backsaw, then cleaned up with a shoulder plane. While today's woodworker probably makes shoulder cuts on a tablesaw, there are occasions where misalignment creeps in. With its low-angle, full-width blade, sole squared to its sides, and solid construction, the shoulder plane excels at working those tough endgrain fibers.

When working shoulders, set the plane for a very light cut and make multiple passes. If planing a narrow shoulder like that of a cabinet door, use a bench hook to support the stock. Lay the board flat on the bench hook and align the shoulder flush with the end of the bench hook's planing stop. This supports the edge of the shoulder and helps prevent splintering. To prevent splintering when working on wide shoulders, clamp the workpiece in a vise with the tenon facing up. Make your first planing cuts from the end of the shoulder to the middle. Then do the same from the opposite end of the shoulder. Work carefully so that the shoulder line remains straight.





Trim tenon shoulders.
When trimming relatively narrow tenons, Gochnour finds a bench-hook jig (above) makes the process easier. The jig's built-in fence helps prevent tearout. Wider workpieces are mounted in a vise and cut without the aid of a bench hook (left).

3 Tune dadoes and grooves

Every now and again, a dado or groove needs to be cut a little deeper. If the joint is wide enough to accept a shoulder plane, I use one to do the job. It's generally faster and easier than resetting the machinery that made the cut initially.

At each end of the dado or groove, use a marking gauge to define the new depth. Adjust the shoulder plane's mouth opening and blade depth for a medium cut so that the work progresses quickly.

To help avoid tearout, start by planing from one edge of the workpiece toward the middle of the piece. You need only plane for a few inches. Then do the same from the other end. Finally, plane the area between the end cuts.

Sometimes I cut a dado entirely with hand tools. To do this, use a backsaw to cut the dado sides to the desired width and depth. The material that remains is removed mostly with a paring chisel working across the grain. Then, the shoulder plane finishes the job in the manner described above.



Deepen a dado or groove. A dado or groove that's too shallow can be deepened by establishing the new depth on each end with a marking gauge (above). Then the shoulder plane is used to cut to the marked lines (right).



4 Cut rabbets

A shoulder plane can cut small rabbets. First, define the base and depth lines with a marking gauge. Then, to create a fence, clamp a straightedge board to the workpiece, making sure it is aligned with the baseline.

Open the mouth of the plane to about $\frac{1}{22}$ in. to accommodate heavier shavings, and then advance the blade for a medium cut. Hold the plane in both hands with its side firmly against the fence. Make multiple passes as needed. When you reach the depth lines, the rabbet is complete.



Cut a rabbet. First use a marking gauge to mark the rabbet width and depth (left). After that, clamp a wood straightedge to the workpiece and start cutting (right).



Tweak rabbet joints

Rabbets are mainstays in woodworking joinery and often will benefit from a tweak with a shoulder plane. I periodically use the tool to correct a misshapen opening for a cabinet back, to improve the fit of a rabbeted case joint, or to size the rabbet of a recessed door panel to just the right fit in a door frame.

Many shoulder planes have a unique feature—they convert to a chisel plane in no time. When a corner meets a corner, like when two rabbets meet at right angles, a chisel plane is the perfect tool for getting into that corner.





Fine-tune a rabbet. A rabbet that's a little too fat can be thinned simply by making a few passes with the plane (above). Rabbeted parts that are slightly misaligned when assembled can be quickly realigned by converting the shoulder plane into a chisel plane (right).

www.FineWoodworking.com NOVEMBER/DECEMBER 2006

Adjust tongue-and-groove joints

I like the look of tongue-and-groove boards

I like the look of tongue-and-groove boards on cabinet backs. I try to fit this joint tight off my machines so that the alignment of the boards is just right. Every now and again, though, a joint is a bit tight and requires the tongue to be slightly thinned. I'll finish it in no time with a few passes of the shoulder plane.

Hold a small board in one hand and plane with the other. On a larger board, plane with both hands, securing the board to the workbench with bench dogs and the tail vise.

Take a shaving or two off each side of the tongue and check the fit. Continue until the fit is perfect.



Tweak a tongue. A tongue-and-groove joint is a chore to assemble when the tongue is too tight. A few swipes on each side of the tongue solves the problem in short order.

Remove machine marks

On flat surfaces, milling marks are easy to clean up with handplanes, scrapers, or sanders. But a shoulder plane is the best tool for cleaning up Inside corners.

On the top and base molding of this cabinet (right), I can plane right up to the raised lip that's machined along the entire length. However, I need to work carefully because I don't want to alter the depth from one piece of molding to the next. I handle this by setting the plane for a very light cut and letting the machine marks serve as a reference to show where and how much material to remove.

On the shallow rabbet that decorates the inside edge of the cabinet door (facing page), I need to remove the router-bit marks before assembly. The shoulder plane is perfectly suited for the task.

A spare plane blade, sharpened to a steeper angle (35° to 40°), can come in handy for long-grain areas with tricky grain. The steeper cutting angle reduces the prospect of unsightly tearout.



Clean up machine marks. Decorative rabbets on the door fronts (right) and the top and bottom moldings (above) of a case have surfaces that will be exposed when the cabinet is assembled. The shoulder plane is perfect for cleaning up the machine marks left by the tablesaw or router.

8 Soften sharp edges

I use a shoulder plane to soften sharp edges that are inaccessible with other planes. For example, on a beadboard back, it's easy to soften the sharp edge on the milled bead by reaching in with the edge of a shoulder plane. Because the blade isn't sharpened on its side edge, the plane won't mar the details that are adjacent to the edge being worked.

To soften or round the edge, set the blade for a light cut and begin with the plane tipped on its edge at about a 50° angle, with the corner of the blade reaching into the bead. Make a series of passes, rolling the plane more upright with each successive pass.



Go places other planes can't. The sharp edge adjacent to the beaded edge of the cabinet backboard is easy to soften with a shoulder plane.

9 Trim mitered molding

The crisp alignment of mitered moldings is a hallmark of fine craftsmanship. Try as I might to get things just right, there are occasions where after the glue is set, slight adjustments must be made to the fit of the molding. These are especially problematic where the molding meets the front or side of a case.

A shoulder plane can be used here as you might a chisel, but with a sole to add control. With a shoulder plane you can carve, shape, and realign moldings for a clean, crisp look.



Plane moldings flush. The top edges of the front and side base moldings were slightly misaligned. Gochnour uses a shoulder plane to get the parts flush.

A User's Guide to Featherboards

Extra hands make machine cuts safer, cleaner, and more accurate

BY ROLAND JOHNSON

eeping my fingers attached to my hands and in good working order is a high priority in my woodworking shop. Featherboards help me do it.

A featherboard is simply a board with a series of slits cut into an angled end, forming a row of flexible fingers that move much like the barbs of a feather. The fingers provide constant pressure to hold stock firmly against tabletops and fences, and the angle allows stock to pass in one direction but resists movement in the opposite direction. They do this especially well at the tablesaw and router table.

But featherboards also increase the quality of router, tablesaw, and even shaper cuts. They maintain pressure exactly where it is needed to keep the workpiece moving in an unwavering, straight line. They are especially helpful for controlling thin stock safely, a particular problem when feeding stock by hand.

This guide will show you how to make a featherboard, and then outline some

Shopmade or store-bought?

I like making featherboards because I can do so quickly and cheaply and I can tailor boards to specific tasks.

That said, the manufactured featherboards offered by popular woodworking catalogs offer their own advantages.

Ease of adjustment and setup are the biggest lures. Most models are made of high-grade plastic and lock quickly, anywhere along a standard miter slot. A slot cut into the featherboard allows rapid adjustment for stock width and finger pressure. Some models (left) also offer an optional hold-down attachment, a feature that varies in usefulness depending on the width and thickness of your stock. The Bench Dog Feather-Loc (center) preserves its setting when removed from the miter slot.

Magnetic featherboards offer the added advantage of infinitely adjustable setup without the need for clamps or miter slots, although a metal surface is necessary.





Store-bought models offer ease of use. Some attach with miter-slot adapters (left) for easily repeatable setups. A magnetic featherboard (right) can be placed anywhere on a metal tabletop.



Start by marking the fence. Use a pencil line to indicate the front end of the blade. Align the featherboard so that it doesn't reach beyond this line, where it could pinch the blade.



Clamp the featherboard in place. Lower the blade and place the stock between the fence and the featherboard. Snug the featherboard against the stock as you tighten the clamp.



A brace keeps the featherboard from pivoting. Push this board snugly into position against the featherboard as you tighten the clamp.



essential featherboard setups on the machines where they are used most often.

Featherboards are easy to make

There are a huge variety of store-bought featherboards, but I like to make my own. It's inexpensive and easy.

Scrap hardwood provides a ready source of material. Flexible woods like ash or hickory make the best featherboards, but any defect-free hardwood will work well.

You could use a softwood like pine, but you'd want to make the fingers slightly thicker. Avoid plywood or medium-density fiberboard (MDF); thin fingers of these materials break too easily.

I make most of my featherboards from 34-in. stock. This is thick enough to support most workpieces that require a featherboard. I sometimes use ½-in. stock for lighter-duty applications. I vary the length and width of the boards according to my

specific needs, but I rarely need a board wider than 8 in. Longer boards are good for mounting to a table-you'll want the board to reach to the far side of the table so you'll have access with a standard clamp. Shorter boards work better in applications where they'll be clamped to a fence.

The bandsaw is ideal for making the stopped cuts needed for featherboards, because the user can back work easily out of the cut. A tablesaw blade creates a wider

71

Holding stock against a fence

Simple side pressure helps keep the workpiece secure against the fence on the router table (below) or the tablesaw. To raise feather-boards off the table for panels or other tall stock (right), secure them with wood screws to a long clamping block. Make sure the boards sit no higher than the top of the auxiliary fence.





kerf than I like between the feathers. Of course, you can cut featherboards by hand: Just mount the board in a vise and use a backsaw to cut a series of parallel kerfs.

To make a featherboard, start by crosscutting the business end of the board at an angle. I find that an angle of about 30° offers the best combination of continuous side pressure and kickback resistance. Cutting the feathers into the board's end grain gives them long-grain strength and flexibility so that they don't snap under pressure. Make the feathers no longer than 3 in.

Keep the feathers thin and the spaces between them narrow. Experiment with what works best for you; I find that the thickest practical feather is about ½ in. If the feathers are made any thicker, the bending action becomes too stiff, and it is difficult to feed the stock past them. A thinner feather doesn't give you as much pressure, but on most cutting operations the pressure doesn't need to be great. It just needs to be consistent.

Proper setup yields smooth, safe cuts

On any machine, start by placing the stock against the fence or on the tabletop. Po-

sition the featherboard firmly against the stock, with the angled end pointing in the feed direction. Secure it to the fence or tabletop with clamps or a miter-slot hold-down. The featherboard should be placed firmly enough to keep the stock against the fence or tight to the tabletop, but not so firmly that it makes it difficult to feed the stock into the cutter or blade. Give the stock a test push to be sure.

Position the featherboards as close to the cutter as possible without putting pressure on the cutter itself. In most cases, placing a featherboard directly opposite the blade or cutter can cause the piece to jam dangerously or even kick back, or the cutter to take too deep a cut. Here are some essential featherboard setups.

The tablesaw: Featherboards allow straighter, safer cuts when ripping long, narrow stock, when cutting rabbets or plowing dadoes in narrow stock, or when cutting tall stock like door panels that might rock against the top of the fence.

For ripping, I like to apply side pressure with a long featherboard that I clamp to the tabletop. Downward pressure comes from a push stick. A table-mounted board

applies side pressure only on the infeed side—pressure on the outfeed side will cause the stock to pinch the blade.

When cutting rabbets, I clamp two featherboards onto an auxiliary fence to apply downward pressure at the dado cutter (breaking the direct-pressure rule) and on the outfeed side of it. If your saw has a Biesemeyer-style fence, be sure to clamp down its back end, because the fence's tendency to lift slightly will relieve pressure on the featherboards and could result in a cut of uneven depth. For dadoes (across the grain) or grooves (with the grain) in narrow stock, I use a single fence-mounted featherboard to apply downward pressure on the infeed side of the cutter. I also use a table-mounted featherboard to keep the stock tight against the fence.

Stock that is taller than the fence needs side pressure both before and after the cut to prevent it from pivoting away from the blade. But applying that pressure with tabletop featherboards can cause the stock to tip away from the top of the fence. The solution is to lift the featherboards a couple of inches above the table with a clamping block.

Holding stock against a table



Fence-mounted featherboards apply pressure from the top down. This keeps stock firmly against the table for tasks like rabbeting an edge on the tablesaw (right) or cutting a molding profile or edge treatment on the router table (above).




The router table: If the stock is too narrow, wide, or short to work comfortably—in short, if controlling the stock will put fingers close to the cutter—featherboards can make the setup safer. Of course, your best bet for safety and quality of cut is to make router cuts on wide boards, and then rip off the pieces you need. But sometimes narrow or thin stock is unavoidable.


Attach the featherboards to the tabletop and fence to apply downward pressure and side pressure on the infeed side of the cutter. Apply either downward or side pressure after the cutter, depending on how well the stock is supported by the table or fence. Keep the infeed featherboards as close to the cutter as possible. The outfeed pressure can be less than that on the infeed side; the idea is just to keep the stock from vibrating or "fluttering" after the cutterhead. If a second pass is needed on a shaper or router table to cut a molding profile, such as a raised panel, the second pass can't have downward pressure near the cutter. This pressure would tend to tip the work into the cut.

Roland Johnson is a contributing editor.

Small stock needs both types of support

Top and side featherboards increase safety and accuracy when working with small, narrow stock. The setup ensures a straight, flat-bottomed dado on the table-saw (right) and a cleanly cut molding or edge detail on the router table (below).



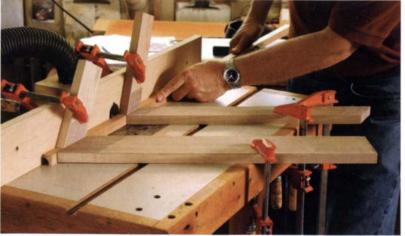

A New Look at Eye Protection

Comfortable glasses, goggles, and face shields leave you no excuse

BY STEVE SCOTT

s beautiful as it might look to you, a woodshop is an unfriendly environment for your eyes. Sanders kick up clouds of irritating dust. The tablesaw throws sharp chips, while small workpieces can burst into flying shards at the miter saw. The lathe peppers its user with wood chips, and grinders throw sparks and abrasive fragments. Hand work also presents dangers: A chisel and mallet can launch chips like little missiles. Less likely perhaps, but just as dangerous, is a caustic splash from a jostled container of solvent or finish.

According to government estimates, hospitals in 2004 treated about 15,000 eye injuries from tools found in most woodshops. Many of these injuries could have been avoided if the victim had worn an inexpensive set of safety glasses or goggles.

"These are not high-ticket items, compared to saving your sight," said Dr. Larry Jackson, an epidemiologist who studies workplace injuries at the National Institute for Occupational Safety and Health.

Jackson, who helped develop U.S. industry standards for safety glasses, recommends that every woodshop be equipped with all three basic types of safety eyewear—glasses, goggles, and face shields. Woodworkers should use some type of eye protection at all times in the shop, he says.

No doubt some woodworkers will balk at that suggestion—it's hard to believe that your eyesight is threatened when you're taking shavings with a block plane or laying out dovetails with a marking gauge and a bevel. But it's also hard to argue against a sure way of keeping your eyes safe: making a rigorous habit of wearing the right protective gear. The argu-



Three lines of defense

Safety experts say there's a need in every woodshop for each of these forms of eye protection: safety glasses for jobs that shoot lightweight chips into the air, goggles to keep heavy dust out of your eyes, and face shields (used with glasses or goggles) to protect your face and repel heavier chips or other projectiles.





Safety glasses ward off small chips and dust

With impact-resistant lenses and frames, and wraparound protection, safety glasses shield your eyes from small flying chips, whether they're launched by a mallet and chisel or by a powerful shop machine. There also are great options for woodworkers with corrected vision.

ment tilts further when you consider how easy it is to find comfortable and effective eye protection.

Every woodworker will strike his or her own balance between convenience and eye safety. Three *Fine Woodworking* editors recently sized up a broad selection of glasses and goggles, looking for models that offer both protection and comfort. Here's an informal overview of the eyewear that's available with some tips on what to look for.

Safety glasses are a must

Any protective eyewear—glasses or goggles—should meet the American National Safety Institute standard known as Z87.1-2003. This means that the lenses, typically made of tough polycarbonate, won't shatter and the frames won't break when smacked by a ¼-in. BB moving at 150 ft. per second. They must also offer generous side protection to keep dust and flying objects out of the corners of your eyes. The lenses, frames, and packaging should all be stamped with a Z87+ to indicate that they meet this safety standard.

Don't wear glasses?—For the woodworker who doesn't wear glasses or who wears contact lenses, the selection of safety glasses is wide and varied. Most fit and look like lightweight sport sunglasses.

We liked lightweight models from Elvex (about \$5)

and Edge Eyewear (\$5) that had large, wraparound lenses for good peripheral vision. UVEX, Crews, and AO Safety also make suitable and inexpensive models.

To aid in a snug and comfortable fit, some models come with a padded or flexible nose bridge, padding at the browline, and adjustable earpieces.

Plenty of options for glasses wearers—If you

wear glasses, you might think they give you adequate eye protection in the shop. They don't.

Your glasses very likely offer no side protection at all, and they probably leave too much room between your brow or cheekbones and the rims of the glasses. Wood-chip projectiles

GOOD PROTECTION ISN'T COSTLY

For \$5, the Elvex Triad offers no-nonsense eye protection in sporty wraparound frames. The glasses feature a flexible nose bridge and earpieces for added comfort.



Elvex Triad

THE CADILLAC

The ESS ICE 2.4 offers military-level impact resistance and greater visibility. The frameless design doesn't interfere with peripheral vision, a common complaint about some protective eyewear. The military cachet comes at a price, though—\$42 per pair.



PRESCRIPTION SAFETY GLASSES CAN BE STYLISH

Optometrists, vision centers, and online retailers offer plenty of styles for safety frames and prescription lenses that meet industry standards for impact protection. Frame prices start as low as \$25 for a utilitarian pair.



Phillips Safety Products

GLASSES FOR YOUR GLASSES

Safety eyewear
designed to fit over
street glasses is a
relatively inexpensive
way for prescription
wearers to protect
their eyes in the shop.
This pair from Eye
Armor (\$25) offers a
snug fit.





Eye Armor

Goggles seal out dust

They offer the same impact protection as safety glasses, but safety goggles close all the gaps between your face and the lens with a foam or rubber lining. This full protection is needed when you're filling the air with clouds of fine dust.






ROOMY ENOUGH TO FIT OVER GLASSES

It's easy to find goggles that fit comfortably over your street glasses. Verdict Goggles by Crews (\$9) offer indirect air baffles for fog control and splash protection.



Some glasses or goggles can be fitted with inserts that hold prescription optics. Others, like the SG1 from Wiley-X (\$90) can be fitted directly with prescription lenses.

Wiley-X SG1



can dart through that gap. Some street glasses also have lenses of glass or acrylic that might not stand up to a direct hit from flying debris.

Safety glasses go a long way toward correcting these flaws. They are designed to fit closely to your brow and cheekbones, and they feature wraparound lenses or side shields to protect the corners of your eyes. The lenses and the frames both are impact resistant.

There are plenty of safety glasses designed to fit over the glasses you already wear. They are sturdy and inexpensive (some cost as little as \$4 per pair), but the challenge lies in getting a good fit.

Safety frames for prescription lenses range from bland and square to sleek and stylish. There are a few wraparound models, but lenses of this shape cannot be ground to fit some prescriptions.

If you wear contacts, you still need safety glasses or goggles to keep your eyes safe. Some safety experts go further and advise against wearing contacts in environments with a lot of dust or chemical fumes in the air, because either of these could become trapped behind the lens and damage your eye. Hard lenses are more likely to trap dust; soft lenses are more vulnerable to chemicals, the experts say. Injury statistics typically don't track contact-lens use, so it's hard to gauge the

threat. The safest course may be to always use goggles over contacts or to take the contacts out and wear glasses instead when you're in the shop.

Jackson and others recommend wearing safety glasses for any light-duty shop activity that doesn't involve power tools. For power tools that throw dust and chips at high speed, they recommend stepping up to goggles.

Goggles provide more comprehensive coverage

Goggles are the most certain way of protecting your eyes from fast-flying debris and heavy floating dust.





Face shields protect head and neck

A face shield is essential at the lathe, which can spray its user with heavy chips. Flying sparks or disintegrating grinder wheels also are a threat. Be sure to wear safety glasses or goggles underneath; flying debris can ricochet behind the mask.

They're better at this than safety glasses because they completely enclose the eyes, and they're held snug to your face with an elastic head strap. Models with baffled air vents provide the best dust protection and also can protect your eyes against chemical splashes.

For the best field of view, we preferred the full-face models that resemble a diver's mask to the motorcyclist style with separate eyepieces.

Some models, like the goggles you wore in high-school chemistry lab, are designed to fit over glasses. Those very goggles, in fact, or ones much like them (Pyramex, \$3), are a great and inexpensive way to protect your eyes in the shop. But with their rubbery, scuba-mask feel, you might not want to wear them for long. A roomy, updated version from Crews has baffled air vents and a foam lining. It's more comfortable but still bulky.

When the heavy chips fly, reach for a face shield

Any task in which the tool forcefully throws large wood chips or other heavy flying particles (wood turning, for instance) calls for a face shield.

A face shield consists of a large, clear visor mounted on a piece of adjustable headgear to flip up and down like a welder's mask. Inexpensive models are available from both Woodcraft and Lee Valley Tools. Just like its name implies, a face shield is designed to prevent flying objects from striking the wearer in the face.

It's easy to feel like your eyes are well protected behind this clear shell, but safety experts say otherwise. Because a face shield is more or less open at the bottom, wood chips or other projectiles could get past it and into your eye. For that reason, the experts say, you should always wear safety glasses or goggles under a face shield. A face shield for your face, glasses or goggles for your eyes.

Steve Scott is an associate editor.

UPDATED VERSION OF THE BASIC SHIELD

Jackson and Uvex offer two slightly different takes on the familiar face-shield design. Jackson's "The Shield" (\$17) mates a set of safety goggles with an impact-resistant shield for the lower face. The Bionic Face Shield by Uvex (\$30) provides extended coverage for the chin and the top of the head.



Uvex Bionic Face Shield

SOURCES OF SUPPLY

Safety eyewear is available at home centers and online. Prescription safety glasses can be found at your local optometrist.

Elvex, Edge Eyewear, ESS, U.S. Safety, Wiley-X, Crews, AO Safety www.safetyglassesusa.com

> Uvex Spoggles, Radians AV www.woodcraft.com

Prescription safety frames and lenses www.RXSafetywear.com;

www.phillips-safety.com

Face shields

www.discountsafetygear.com; www.labsafety.com



Stop Guessing at Wood Movement

Figure out exactly how much of a gap to leave in drawers and floating panels, no matter the wood or season

BY CHRISTIAN BECKSVOORT

easonal changes in humidity cause wood to expand and contract (shrink) in width. Woodworkers refer to this phenomenon simply as "wood movement." In relatively narrow boards, say, under 5 in., this movement is rarely an issue. But, as boards get wider, wood movement becomes an important consideration. Ignore it, and problems wait in ambush.

If you build a snug-fitting drawer in midwinter, when humidity typically is low and the wood has shrunk to its minimum width, you'll almost certainly have problems come the end of summer, when humidity is high and the wood has expanded to its maximum width. A drawer cut too wide, if it expands, can end up jammed in the drawer opening and stuck fast. It also can push against the drawer opening and stress the joints. By the way, humidity has no measurable effect on the length of wood.

When I teach case construction, the two most frequent questions are "How much gap do I leave over this drawer?" and "How far should my door panel fit into the frame grooves?"

Most woodworkers make such decisions based on little more than a guess. But luck doesn't have to be your best friend here. You can predict pretty accurately how much a board will move simply by knowing: (1) the species, (2) the grain orientation (flatsawn or quartersawn), (3) the width, (4) the current moisture content (MC), and (5) the expected highest and lowest MC.

www.FineWoodworking.com

To collect this data, you'll need a Wood Movement Reference Guide (available from Veritas, www.leevalley.com, for about \$6), a moisture meter, a calculator, a ruler, and a dial (or vernier) caliper. Or, you can skip the guide and use a chart and formula (see p. 81). A decent moisture meter can be had for around \$100.

Determining the width of a drawer

To determine wood movement for an inset drawer front and sides, I first cut the drawer front and sides for a friction fit.

Sizing a red-oak drawer in winter—To determine the final drawer width, though,

I need to collect the pertinent information and use the Wood Movement Reference Guide. As an example, let us assume an 8-in.-wide drawer opening. The wood is flatsawn red oak. Because it's Maine in late winter, the MC is 6%, as low as it will ever get.

I have no way of knowing where in the world my furniture pieces eventually will be shipped, so I assume a potential worst-case scenario of 16% MC—a 10% increase. The guide shows a movement value of 0.0037 for flatsawn red oak. To calculate the worst-case wood expansion, I multiply the movement value (0.0037) by the width



Fitting a drawer

A drawer cut and fitted to just the right width offers a smooth, sliding fit even on the most humid of summer days, with as narrow a gap as possible when the drawer shrinks in winter.



1. MEASURE THE OPENING

Measuring the drawer opening, top to bottom, provides the maximum width for the drawer.



2. DETERMINE THE MOISTURE CONTENT OF THE WOOD

Use a moisture meter to measure the moisture content (MC) of the drawer front, back, and sides. By the way, if the parts come from more than one board, make sure the boards have the same moisture content, within plus or minus 2%, or so. If a drawer has parts with radically different MC, the parts won't move the same amount, which could stress joints.

(8 in.), by the worst-case increase in MC (10%). Doing the math I get $[0.0037 \times 8 \times 10] = 0.296$ in., or $^{1}\%_{4}$ in., just under $^{5}\%_{6}$ in. Therefore, I cut the drawer front and the two drawer sides to $7^{11}\%_{6}$ in. (8 in. minus $^{5}\%_{6}$ in.).

If I am making lipped drawers, a standard ¼-in.-wide lip won't fully cover the gap when the board is at 6% MC at the end of winter. So, I'd make a 5/16-in. lip.

After assembling the drawers and the case, I use a handplane to trim the ends of the front and the outside faces of the drawer sides to create ½4-in. to ½2-in. clearance on each end.

Sizing a red-oak drawer in summer—Now, let us assume we are building the same drawer in Maine at the end of summer. The MC measures 13%. Again, with 16% MC as a potential maximum, the board would experience an increase of 3% (16% minus 13%). Written out, it looks like this: $[0.0037 \times 8 \times 3] = 0.088$ in., or just under $\frac{3}{2}$ in., meaning an inset drawer would be cut to $7^2\%_2$ in. (8 in. minus $^3\%_2$ in.). The same drawer, at the end of winter, will have an MC of 6%. That's a decrease in MC of 7% (13% minus 6%). Calculating the shrinkage, I get $[0.0037 \times 7^2\%_2$ in. $\times 7] = 0.205$ in., $^1\%_4$ in.

Keep in mind that these numbers are based on unfinished wood. To a certain extent, applying a finish slows the transfer of moisture to and from the wood, and adds a margin of safety.

Determining the ideal width of a panel

Frame-and-panel construction has lots of eye appeal and is a very stable construction system. That's because it gives solid-wood panels the freedom to expand and contract in width as the humidity changes, without affecting the size of the frame.

For woodworkers, the challenge is to determine the ideal width to cut the panel. If a panel is cut too wide and expands in width, it will bottom out in the grooves, and apply pressure to the frame joints.


But if the panel is cut too narrow, it will shrink so that the side edges are no longer in the grooves. When that happens, you'll see dreaded daylight along each side. You can solve the problem by adding a vertical divider (effectively making two narrow panels rather than one wide one) or by widening the groove cut in the frame parts.

Sizing a cherry panel in winter—Let us say it's the end of February and I've made a cherry door frame. Dry-clamped, the inside edges of the frame measure 10 in. between stiles and 26 in. between upper and lower rails. Centered on the inside edges of all four frame parts is a ½-in.-wide by ½-in.-deep groove. Therefore, the dimensions, bottom-of-groove to bottom-of-groove, measure 11 in. wide by 27 in. long.

Determining the length to cut the panel is a no-brainer. Because the length changes little as the humidity changes, I simply cut the panel ½6 in. shorter, to

3. CALCULATE THE MOVEMENT

Use the maps below to determine the maximum seasonal change in moisture content (MC). Then use the provided formula to calculate anticipated wood movement.



Moisture content of interior woodwork in January Moisture content of interior woodwork in January Moisture content of interior woodwork in July

SEASONAL MOISTURE CONTENT

In most of the United States, the average MC of interior woodwork varies from winter to summer. It's those seasonal changes that cause wood to shrink in winter and expand in summer. Because Becksvoort does not know where his furniture will be shipped, he always assumes a 10% increase from winter to summer.

USE THIS FORMULA WITH A REFERENCE WHEEL OR A CHART

To determine how much a board will expand or shrink, use this formula. For the movement value (MV), use either a reference wheel or the chart below.

Expected expansion or shrinkage = (MV) x (board width) x (expected change in moisture content)

◀ REFERENCE WHEEL

The Wood Movement Reference Guide isn't a necessity, but it conveniently puts in your hands the quartersawn and flatsawn movement value (MV) for over 70 wood species.

CHART

If you'd rather not buy the guide, you can use the chart below to get the movement value (MV). The formula and abbreviated chart are adapted from the Wood Handbook, published by the U.S. Department of Agriculture, Forest Products Laboratory. For the complete chart (Table 12-5) listing more than 120 species of wood, go to www.fpl.fs.fed.us.

SPECIES	QUARTERSAWN	FLATSAWN
Alder (Red)	.0015	.0026
Ash (White)	.0017	.0027
Aspen (Quaking)	.0012	.0023
Basswood (American)	.0023	.0033
Beech (American)	.0019	.0043
Birch (Yellow)	.0026	.0034
Butternut	.0012	.0022
Cherry (Black)	.0013	.0025
Fir (Balsam)	.0001	.0024
Mahogany	.0017	.0024
Maple (Red)	.0014	.0029
Maple (Sugar)	.0017	.0035
Oak (Red)	.0016	.0037
Oak (White)	.0018	.0037
Pine (Eastern White)	.0007	.0021
Pine (Longleaf)	.0018	.0026
Pine (Ponderosa)	.0013	.0022
Pine (Sugar)	.0010	.0019
Poplar (Yellow)	.0016	.0029
Sweetgum	.0018	.0037
Sycamore (American)	.0017	.0030
Teak	.0010	.0019
Walnut (Black)	.0019	.0027

4-5 5-6

6-7

7-8

8-9 9-10

10-11

11-12


12-13

>13%

Fitting a drawer (continued)

4. TRIM THE DRAWER TO FIT

Becksvoort planes the top edge of the drawer front and sides until he hits the trim-point. A quick test shows a perfect gap between the top edges of the drawer and the drawer opening.




After determining how much to trim from the drawer front and sides to allow for future expansion, Becksvoort saves layout time by simply setting his

saves layout time by simply setting his dial caliper to the calculated distance and using a knife to mark the trimpoint directly on the drawer front.

26¹⁵/₁₆ in. Figuring the panel's width again requires the guide. The panel is cherry and flatsawn. The maximum panel width is 11 in.; the minimum is 10 in. The moisture meter measured the MC at 6%, and considering it's late winter in Maine, that's as low as it will get. So the MC can only increase. Again, I assume a potential worst-case scenario—16% MC—a 10% increase.

Using the above information, and with the guide in hand, I determine that the movement value for flatsawn cherry is 0.0025. To calculate the worst-case wood expansion, I multiply the movement value (0.0025) by the width (11 in.), by the worst-case increase in MC (10%). Written out, it looks like this: $[0.0025 \times 11 \times 10] = 0.275$ in.

To be on the ultraconservative side, I add another ½6 in. and come up with

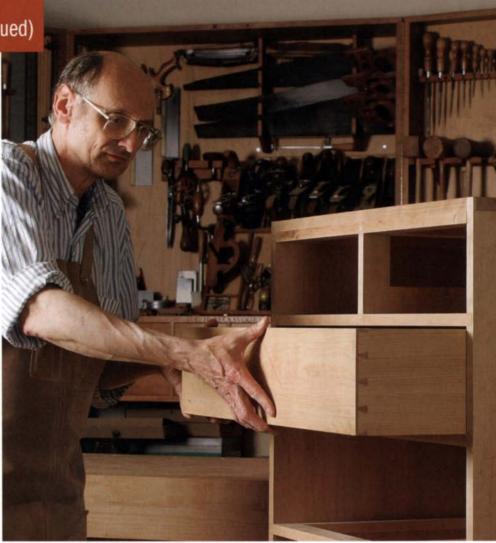

about $^{11}/_{32}$ in. That's how much this board could expand. So, to make room for it in the frame, I subtract $^{11}/_{32}$ in. from my total available space of 11 in., resulting in a panel width of $10^{21}/_{32}$ in. Rounding it down to an easier number, I cut the panel to $10^{5}/_{8}$ in. wide.

Sizing a cherry panel in summer— Now, let's assume that I'm building that same frame-and-panel in August. Because it's well into a humid Maine summer, the moisture meter reads 12% MC.

Again, I anticipate a potential worst-case maximum MC of 16%. But now the difference between the current MC and the worst-case MC is 4% (16% minus 12%). Multiplying the movement value (0.0025), by the width (11 in.), by the anticipated increase in MC (4%), and you get $[0.0025 \times 11 \times 4] = 0.110$ in., which is just under ½ in. Adding ½ in. as an extra safety factor, I'd cut my panel to a width of 10^{13} ½ in.

Next, I run the numbers to find out how much that 10^{13} /i6-in.-wide panel will shrink come the end of winter, when the MC could be as low as 6%. With an expected decrease of 6% (12% minus 6%), the numbers look like this: $[0.0025 \times 10^{13}$ /i6 \times 6 = 0.162 in., or about 11 /k4 in. So, in winter, when the moisture content of the panel drops back to 6%, the panel cut to 10^{13} /i6 in. wide would shrink to just over 10^{5} % in. $(10^{13}$ /i6 in. minus 11 /k4 in.). As a result, the side edges of the panel would extend a comfortable 5 /i6 in. into each stile groove.

At first, this process might seem a bit daunting. After you've done it a few times, though, the entire procedure will take only a few minutes. The payoff is the peace of mind knowing that wood movement won't be a problem. As a professional woodworker, that's important to me.

Christian Becksvoort is a contributing editor.


Fitting a panel

In frame-and-panel construction, a solid-wood panel cut too wide or too narrow will cause problems down the road (see drawing, below). If too wide, an expanding panel will push on the frame stiles, causing stress on the frame joints that could ultimately lead to failure. If cut too narrow, the panel may shrink to the point that it's no longer in the stile grooves, and you'll see a line of daylight along the two side edges. By calculating the future panel movement, you can anticipate a problem, and add a divider or cut a deeper groove to permit additional movement.



Measure for the panel. To determine the maximum available width for the panel, Becksvoort marks the groove depth all around a dry-fitted frame, then measures from groove-bottom to groove-bottom.

SIZE SOLID-WOOD PANELS TO COMPENSATE FOR EXPANSION AND CONTRACTION

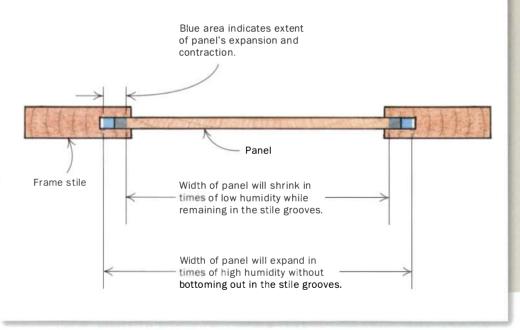



Cut the panel to size and check the fit. After measuring the moisture content of the panel and doing the math to determine the appropriate width, the panel is cut to final size and checked against the dry-fitted frame.

The ABCs of Letter Carving



PALATINO: A SIMPLE BUT STYLISH TYPEFACE

The shapes of the letters make this font a good choice for carving. Chances are, the word-processing program on your home computer includes it. If not, photocopy this font at the size you need, cut the letters apart, and rearrange them.

etter carving is well worth learning because it transforms and personalizes otherwise ordinary objects. When someone receives a jewelry box or a piece of furniture that you've made and inscribed with their initials, they know they have an heirloom.

I began carving letters more than 30 years ago, while studying to be a boat-builder. An extraordinary craftsman who made bagpipes and did wood carving inspired me. I was awestruck by how quickly and effortlessly he could carve perfect letters. I began to practice sign carving myself, and in 1981, I carved a sign for Cole-Haan shoes when it opened its first

store in Freeport, Maine. That led to signs for Polo Ralph Lauren, Tommy Hilfiger, Gant, Calvin Klein, and others.

BY T.J. McDERMOTT

I've developed a simple and straightforward technique for letter carving that has served me well over the years. You can do most of the carving with a ¾-in. bevel-edge chisel. The only other tool you may need is a #7, 14-mm gouge. Both are shown in the photo above.

Good letter carving depends largely on learning to trust your eye and developing a rhythm in the work with a feel for how the chisels move through the wood. You'll eventually learn the most comfortable

ABCIDIE GIL



Cut and paste. To achieve the best spacing, cut out letters and move them around. Use a straightedge to be sure the letters stay on the same horizontal line.

way to hold a chisel, which chisels work best for you, and which woods work well for carving.

Good carving starts with good layout


Any large bookstore will have books on letter styles, letter spacing, layout, and the like. For simplicity's sake, you might want to start with a typeface that's available on your home computer. The font shown here, usually called Palatino, adapts well to lettercarving and has some distinctive touches, such as the extralong curve on the letter J. Fonts such as Times Roman and Garamond are also good choices.

On the computer, type the characters you want to carve and enlarge them to the size you want. Take advantage of options that let you modify characters, making them bolder, for example, or stretched out. When you're satisfied, print out the letters.

Draw a horizontal guideline across the bottom of the characters to help keep them aligned. Keep in mind

Spend time on the layout


Adjust the letter sizes to fit the space. Take time to arrange the letters so that they look evenly spaced. Try moving letters like A, F, and T closer to their neighbors, and pushing letters like H and M farther away. Trust your eye to tell you when the spacing appears uniform, even if the ruler says otherwise.



Round letters extend past top and bottom of others.



Transfer shapes. Use carbon paper to transfer the outline of the curved parts of the letters onto the wood. Don't try to trace the straight parts of the letters freehand.



Finish with a straightedge. Use a square or bevel gauge to draw straight, parallel lines connecting the curved shapes. If the top of a letter doesn't exactly match up with the bottom, split the difference and blend the lines together freehand.



Mark the centers. Measure the exact center of each part of the letters. This line is critical because it marks the first place you'll carve, to set the depth of the letter. Use a straightedge to draw the centerline. Freehand the curves that join the points of the serifs to the centerlines.



Start in the center

Use clamps or benchdogs to hold the work firmly in place. Push the point of the chisel into the centerline to establish the depth of the carving. You may need three or four passes to achieve the proper depth. Score the narrow parts of a letter only half as deep as the wide parts. You may want to use a mallet to score harder woods, but pounding the chisel into a soft wood will compress the fibers.



Straight chisel for big curves. It's easier to push the point of a straight chisel around large curves than it is to try to make a curved gouge follow a curved line with a different radius.



Use a sweep for serifs. A curved carving gouge makes it easy to connect the point of the serif to the center. Angle the gouge so that the shallowest part of the cut is at the point of the serif.

Score the centers.

Hold the chisel in one hand and use the thumb or a couple of fingers on your free hand to help push, pull, and guide it across the wood. Angle the chisel so that one corner does the work. Push down and carefully score the centerline.

that rounded capital letters (C, G, O, Q, S) will extend above and below the guideline. If they actually lined up with the others, they'd look too small.

Try positioning the characters so that they're centered left and right in the space you want to fill. Allow more space below the letters than above. If you don't, the letters will appear too low.

I've seen many signs done by supposedly professional sign shops that suffer from bad letter spacing. You can make adjustments on the computer, but the best approach is to cut the letters apart and move them until the spacing looks right. Be sure to keep them aligned on their guideline, and tape them together.

FineWoodworking.com

Visit our Web site to watch a video of McDermott carving the letter R.

Transfer from paper to wood

Carbon paper is best for transferring designs onto wood. You also can use graphite paper, available at most craft-supply stores. Begin by tracing all the curved parts of the letters with a pencil. Some type-faces, including Palatino, have serifs that are squared-off (see the sample below). While you can copy that feature, it's simpler to fair the serifs out to a point.

Next, use a square or a bevel gauge to draw in the straight parts of the letters, connecting the curves. Be aware that seemingly straight lines in some typefaces actually have a slight curve in the middle or a slight taper from bottom to top. You'll have to blend the straight lines into the curves by eye. Finally, measure the center of each part of the letters and draw in the centerlines. Freehand a curve from the points of the serifs down to the centerlines.

Get in a rhythm for carving

Begin the actual carving by scoring the centerline of each letter with a corner of the chisel. It's better to make multiple passes to score the lines, so you can develop the right feel. These scoring cuts set the depth of the letters, but don't carve very deeply or you can spoil the look. For the letters shown on the opening page, I went only about ½ in. deep.

Be sure your work area is well-lit. I use a drop light with a 100-watt full-spectrum bulb, positioned about 45° to the left or right of the work and 2 ft. to 3 ft. above the bench.

Carve methodically

Carve one side. Hold the chisel bevel-up, place it on a penciled line, and push down and toward the center. Start with a shallow cut, gradually increasing the angle and depth until the side of the letter meets the scored centerline.

Rather than completely carve one letter at a time, do the same parts of all the characters. That helps you develop a rhythm and ensures that you'll make consistent cuts from one character to the next. So, score all the right-hand serifs, then all the left-hand serifs, and so on. Carve one side of all the letters, then flip the workpiece and carve the other side.

Keep yourself and your chisels sharp

Razor-sharp chisels are a must for good carving. I sharpen mine with a 1x48 Delta narrow-belt sander (a worn 220-grit belt works fine) and a felt buffing wheel. As soon as I feel signs of resistance or sticking from the chisel, I touch it to a soft felt wheel charged with compound.

Carving letters is an intense and deeply focused pursuit. For the best control, stand at the bench and lean over the work. Remember to move around, walk away for a while, or stretch. You'll come back relaxed.

T.J. McDermott is a sculptor and wood-carver in Freeport, Maine.

Work from one side to the other, cutting the same parts on each letter—all the straight sections, all the curves, all the serifs. That makes it easier to get a feel for how the chisel moves through the wood and sets up a rhythm for the work.

Be careful on the curves. When carving curves with a straight chisel, keep it beveldown, and be sure you're aware of the grain direction. You can easily blow out part of the carving by pushing the wrong way. Remove just a little wood with each pass.



Lighten up on narrow parts. Try to get a feel for the depth of cut, so you can apply light pressure to the chisel on narrow parts of a letter and gradually increase the pressure for wide parts.



Flip the work to finish. When you've carved one side of all the letters, flip the workpiece and carve the other side. You always carve in the same direction, making it easier to get uniform results.



Clean up carefully. Gently erase stray pencil lines, then give the workpiece a light hand-sanding. Use a sanding block to avoid rounding the edges of the letters.

87

Z0123456789

readers gallery



RANDY LEAVITT South Royalton, Vt.

Leavitt designed this maple and walnut table (42 in. wide by 84 in. long by 29½ in. tall) to be the centerpiece of his client's great room, which overlooks the Connecticut River. Built in homage to the trees that frame the view outside the client's window, the table has a base that rises from the floor like the roots of a tree and spreads out like branches. The live edges of the planks that frame the tabletop, combined with the shimmer of the inset glass top, mimic the river. The table is finished with an oil-and-varnish mixture.

KENNETH STOVER

Rancho Santa Fe, Calif.

These tea tables (11 in. deep by 16 in. wide by 21½ in. tall) have a dominant Louis XIV lineage, but Stover adapted the inlay in the tops directly from a music stand (circa 1770-75) attributed to noted 18th-century ebeniste Martin Carlin. The stand is on exhibit at the Getty Museum in Los Angeles (www.getty.edu). In keeping with the antique feel of the tables, all of the veneers are more than 100 years old (circa 1880), acquired from a dealer in Paris. The tables are made of poplar and mahogany, veneered with Brazilian rosewood. The inlay in the tops features veneers of boxwood, tulipwood, amaranta, kingwood, and ebony. The finish is French polish.



CELINE SCHMIDT

Saskatoon, Sask., Canada

The focal point of this cabinet-on-stand (17 in. deep by 17 in. wide by 70 in. tall) is the inlaid wheat leaves, which are set in the foreground of a repeating prairie sky created with straight-grained tulip poplar veneer. To get the grain of the veneer to wrap seamlessly around the piece, Schmidt laid up the veneer in one large panel, then laid out the marquetry pattern on the sheet using a paper template. She cut up the sheet in different sizes to fit the substrates, added the marquetry leaves, then applied the veneer using a veneer press. The doors run on wood slides, and the finish is a mixture of tung oil and Varathane.



This Mackintosh-inspired Arts and Crafts desk is based on an original built in Scotland by Wylie & Lockhead (ca. 1900). The problem was getting a good-quality photograph of the original—designed by E.A. Taylor (1874-1951)—from which Hall could develop measured drawings. Fortunately, Hall's mailman delivered. While visiting Scotland, the mailman bought a book with a photo of the desk and brought it back. The desk (18½ in. deep by 37 in. wide by 57 in. tall) is made of quartersawn white oak, with poplar as a secondary wood. Hall made all of the hardware and leaded stained-glass inserts. The finish is Watco medium-walnut Danish oil.



Submissions

Readers Gallery provides design inspiration by showcasing the work of our readers. For consideration, send entry forms (available at www .FineWoodworking.com) and photos (unaltered digital images, prints with negatives, or slides) to Readers Gallery, Fine Woodworking, 63 S. Main St., Newtown, CT 06470, or email fwgallery@taunton.com. If you want materials returned, you must include a self-addressed envelope with appropriate postage.

$readers\ gallery_{\tt continued}$

FRED SHINDLE Collingswood, N.J.

This comb-back Windsor (17½ in. deep by 23 in. wide by 53 in. tall) is based on the speaker's chair built for The Carpenters' Company, a trade guild, and used at the meeting of the First Continental Congress in 1774 at Carpenters' Hall in Philadelphia. Shindle was given access to the original by The Carpenters' Company so that he could take photographs and measurements. His version now resides in the main hall where that first meeting took place. The

chair has a poplar seat, maple turnings, hickory spindles, mahogany arms, and a white-oak crest. The finish is two coats of black milk paint followed by linseed oil.

PHOTO: J. ELBERSON PHOTOGRAPHY



ED ZBIK San Diego, Calif.

Zbik assembled and turned this segmented vase out of curly maple, bloodwood, zircote, holly, lacewood, satinwood, and ebony. Called "Butterfly Vase," the piece is 9½ in. dia. by 14 in. tall and is finished with Waterlox Original.



MICHAEL PARK Columbia, Md.

Park built this ash table as a project while a student in the woodworking and furniture program at Rochester Institute of Technology. The graceful curves and airy feel were inspired by Korean furniture. All of the parts are bent-laminated. The table is 16 in. deep by 36 in. long by 17 in. tall and is finished with Bartley clear gel varnish.






RICHARD E. GIES Kennett Square, Pa.

Gies had been honing his furnituremaking skills for 25 years before tackling this tall case clock (11 in. deep by 19 in. wide by 86 in. tall). To make the piece, a classic example of an 18th-century Philadelphia-region clock, Gies took measurements from an original owned by a friend. From

those dimensions, he created full-scale working drawings. The clock, made of cherry with poplar as a secondary wood, is right at home in Gies's 1830 Quaker farmhouse. The finish is water-based stain and tung oil.

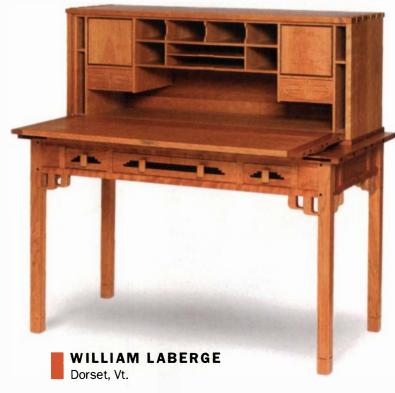

This writing desk was inspired by one built by the Greene brothers for the Robert R. Blacker House in Pasadena, Calif. It is made of cherry, with walnut and ebony accents, and is 24 in. wide by 50 in. long by 48 in. tall. When not in use, the writing surface can be folded up and locked. Laberge carved the pulls, corbels, and legs. The finish is hand-rubbed oil.

TRISH NORTON

Newport, Del.

Norton's winged couch (60 in. deep by 72 in. wide by 78 in. tall) reflects her style of sculpture, which often incorporates curves and the winged form. This piece was inspired by the sandhill crane, which has a wide wingspan and a long, thin neck. It is made of maple and features steel legs and aluminum feathers. The crane eyes are ebony. The wood is stained for a frosted appearance, while the steel and aluminum are coated with spray enamel and lacquer, respectively. The upholstery is cotton fabric. PHOTO: BOB MCLAN



91

www.FineWoodworking.com NOVEMBER/DECEMBER 2006







READER SERVICE NO. 164









Electrophysics

1-800-244-9908

READER SERVICE NO. 5

Box 1143, Station B London, Ontario Canada N6A 5K2

www.electrophysics.on.ca







READER SERVICE NO. 165



For A Free Catalog Or To Find Your Local Woodcraft Store, Visit www.woodcraft.com Or Call 800-542-9115.

Fasten your tool belts and prepare for the ultimate

test drive. Visit your local Woodcraft store to

take a spin with Festool's new Rotex Dual

Mode Sander!





FESTOOL.

FESTOOL Rotex Dual Mode Sander Model RO 150 FEO

If you need fast material removal plus smooth fine sanding, but only want to buy one tool, the Rotex is for you. It switches instantly from random orbital sanding motion to the Rotex rotary random orbital motion, to cover rough sanding, fine sanding, and polishing. 6" Dual Mode Sander has a $\frac{3}{16}$ " stroke for intermediate sanding and fast stock removal. 6 Amps, 320-660 RPM rotary motion speed, 3,300-6,800 RPM eccentric motion speed, 5 lb.

Systainer Storage



Multifunction Table



Dust Extractor CT 22



Toolie Tool



Visit www.woodcraft.com/festool.aspx to see the full line of Festool products.

Dept: 06WW12P



Cutting mortises for bed-rail hardware

Q: In FWW #175, Jeff Miller made it look easy to install bed-rail brackets. I want to know how he gets such clean mortises in the end of 80-in.-long rails. Does he use a router or cut them by hand with a chisel?

-VINCENT IANNELLI, Portage, Mich.

A: THERE ARE A COUPLE OF TRICKS

that help you use a router to cut mortises in the end of a long workpiece. First, use a jig to support the router. I

built the T-shaped jig shown here. The top of the T supports the router, and the base clamps to the workpiece. Second, hold the workpiece at an angle in the workbench vise. I've found that angling the long rail this way is safe and comfortable, although it takes a little work to support the router.

Scribe the exact outline of the bed-rail bracket you want to use. Once you've finished hollowing most of the mortise with the router, clean it up with a chisel. With most of the wood already removed, the chisel should track the scribed lines cleanly.


—Jeff Miller, a furniture maker in Chicago, is the author of Beds (The Taunton Press, 1999).



Mortise

Top

The long base on this jig helps to steady it on a long rail. Size the base to match the width of the rails you're using. Cut the mortise in the top larger than the bed-rail bracket to allow for use of a guide bushing on the router. Be sure the mortise is centered on the end of the rail.

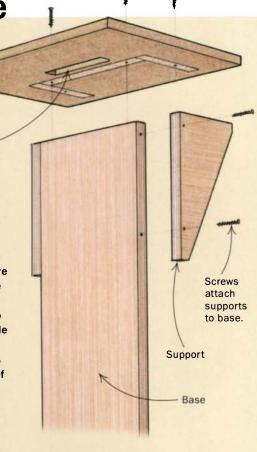



Hold the work at an angle. Use a bench vise to steady the bed rail at a good working height. Clamp the jig to the end of the bed rail. With a plunge router, straight bit, and router template guide bushing, cut the mortises into the ends of the bed rails.



Clean up the mortise. Pare away the remaining waste with a chisel to make a snug housing for the bracket.

Ask a question

Do you have a question you'd like us to consider for the column? Send it to Q&A, *Fine Woodworking*, 63 S. Main St., Newtown, CT 06470, or email fwqa@taunton.com.






BOATBUILDERS SWEAR BY IT, and so will you.

Strong, waterproof WEST SYSTEM® Brand epoxy is more than a 2-part adhesive. It's a complete system of resin, hardeners, fillers and additives from which you can easily create the perfect bonding, coating and sealing agents for your wood or composite project.

For a free copy of the 30-page WEST SYSTEM® User Manual & Product Guide, write:

West System, Inc. P.O. Box 665 Bay City, MI 48707 866-937-8797 www.westsystem.com

READER SERVICE NO. 50

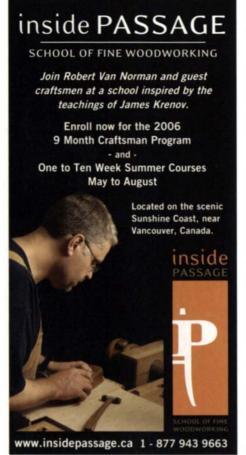



READER SERVICE NO. 135





READER SERVICE NO. 25

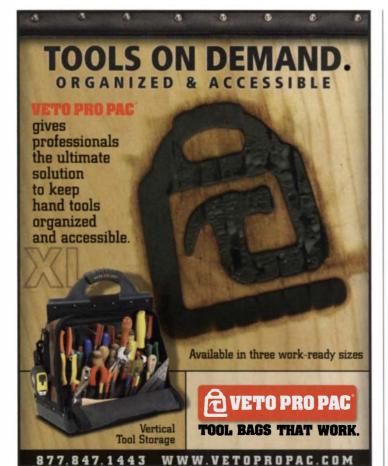





READER SERVICE NO. 33



Will green wood soak my shop?

Q: How do I keep my expensive lathe and bandsaw from damage and rust caused by cutting and turning green wood? Will the wood raise the humidity level in the shop and cause other tools to rust?

> -RICH LEHMANN, Glendale, Calif.

A: GREEN WOOD CAN RUST

unpainted cast-iron surfaces very quickly. So sweep up chips at the end of every turning session—even if you're only going to lunch.

I usually end any green-wood turning session by vacuuming the machines and the shop, then giving bare metal surfaces a coating of WD-40. That will take care of humidity problems that the shavings may create. Green shavings dry quickly, so it's a good idea to remove them at the end of the day to minimize a fire hazard.

—Ernie Conover, a regular contributor, teaches woodworking in Parkman, Ohio.



A breeze. Turning green wood is a joy, quickly producing mountains of long shavings. But they hold enough moisture to rust bare metal in short order. To keep rust from developing, remove the shavings and clean the shop.



FREE Tool Catalog

Visit one of our stores located nationwide! Call us for the store nearest you.

Your Best Work Starts With Us...

with over 8,000 of the finest woodworking tools in the world.









minutes! Make over 500 standard pat-

terns, curved molding, tongue & groove, any custom design. **QUICKLY CONVERTS** from Molder/ Planer to Drum Sander or power-feed Multi-Blade Rip Saw!

Variable Feed Makes the Difference!

Just a twist of the dial adjusts the Woodmaster from 70 to over 1,000 cuts per inch. Produces a glass-smooth finish on tricky grain patterns no other molder/planer can handle. Plenty of American-made "muscle" to handle money-saving, "straight-from-the-sawmill"

Prouder than ever to be MADE IN AMERICA! Call Today for FREE FACT

READER SERVICE NO. 45



- * 29 kayaks, canoes, rowing boats & more.
- * Pre-cut parts, epoxy & hardware included.
- * Advanced design stitch & glue.
- * Free catalog 410 267.0137 or online:

clcboats.com

READER SERVICE NO. 22

Australian School of Fine Furniture

Enrollments for 2007 are sought for one of the world's most comprehensive fully accredited, two year ociate Degree course in the designing and making of fine furniture.

For information contact: University of Tasmania Web: www.utas.edu.au/asff

Ph: 61 3 63 310288 Fax: 61 3 63 312660



READER SERVICE NO. 85



The new MULTIMASTER RS Remodeling/Renovation System. Everything you need to make your house like new in one great kit.

The MULTIMASTER does things other power tools can't. Sand into corners and along edges. Undercut a door jamb. Plunge into baseboard...right through the nails. Remove grout. Replace broken tile. Scrape paint. For more information, a free brochure and a dealer near you call 1-800-441-9878 or visit us online at www.feinus.com.

Powered by innovation





READER SERVICE NO. 125

READER SERVICE NO. 15



Wrenches and router collets


Q: Why do I have to use a wrench twice when I want to remove a router bit? The wrench seems to loosen the nut on the collet, but after a couple of turns by hand, I have to use the wrench again to release the bit.

-DAVID CREITZ, Kennesaw, Ga. **A:** MOST ROUTER COLLETS are designed with a slight taper that won't self-release. Once tightened, the collet won't come loose without being pulled. When you loosen the collet nut and continue to turn it, you bring the nut up against a rim or a snapon circlip on the top of the collet. You have to use the wrench a second time so that the nut applies enough force to lift the collet out of its socket.

—John White is Fine Woodworking's shop manager.



Friendly persuasion. Most router collets have a slight taper and require some leverage to undo. That's why you have to use wrenches after the collet nut loosens.

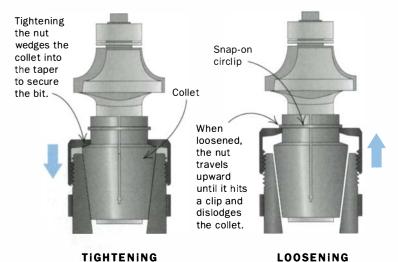

Is MDF hazardous?

Q: What is the toxicity of MDF dust, and what hazards do we face by being exposed to this material?

- PETER LUNDQUIST, Calumet City, III.

A: MOST MDF, or mediumdensity fiberboard, is held together with ureaformaldehyde resins. This type of adhesive lends strength and stability to the panels, but also emits small amounts of formaldehyde. This can irritate eyes and respiratory systems and cause more severe health problems in people with an extreme sensitivity. Two alternatives are Medex and Medite II from Medite Corp. (www. sierrapine.com). These products emit extremely low



Side effects. MDF is a versatile material, but the urea formaldehyde that holds panels together can be a health hazard to some sensitive individuals.

Finish inside a blanket chest?

Q: I finished the outside of a blanket chest with Tried & True Varnish Oil. Do I need to finish the inside to keep the wood from splitting and warping? If so, is there a finish that will be odorless after a couple of weeks?

- MICHAEL WOLLOWSKI, Terre Haute, Ind.

A: YOU CAN LEAVE THE INSIDE

carcase of the chest unfinished if you like, but I would play it safe and seal it. Avoid oil-based finishes because their odor will linger and permeate the contents of the chest. That won't happen with shellac, because most of its alcohol solvent evaporates very quickly. I'd apply two coats, followed by a coat of wax after the shellac has dried for 24 hours.

—Jeff Jewitt, a wood finishing expert, is a frequent contributor.



Instant access to all the great stuff that goes beyond the printed page



Over 1,200 articles | 200+ skill-building videos | Over 200 furniture projects
500+ side-by-side tool comparisons | Fully indexed, searchable archive | Expert help for every skill level

Get instant access to the most dynamic woodworking site online and enjoy the perfect complement to our *Fine Woodworking* magazine. It's always worth exploring FineWoodworking.com, because we add new content every weekday. Here you'll discover fresh, new ideas and know-how to inspire, instruct, and answer your questions. And all of it is just a click away!

Take a look right now! Explore FineWoodworking.com/New



wood turning


Sharpening gouges: the 40° solution

BY MIKE MAHONEY

n my years of teaching wood turning, I've noticed that many students have trouble learning how to grind gouges correctly. That's understandable. Unlike most other turning tools, a bowl or spindle gouge must be moved in two directions simultaneously—rolled against the grinding wheel while being swept from side to side. That's the only good way to keep the gouge's distinctive fingernail profile and a cutting edge beveled at a consistent angle along the curved end of the tool.

The proper bevel is crucial for cutting wood efficiently. As a rule, the more acute the bevel, the cleaner the gouge will cut and the less force you'll have to use. For most turnings, a 50° bevel is better than one of 70°, and 40° is better still.

The sharpening jigs I've seen produce an uneven bevel, invariably 16° to 20° more acute on the sides than at the tip. That's because they aren't designed

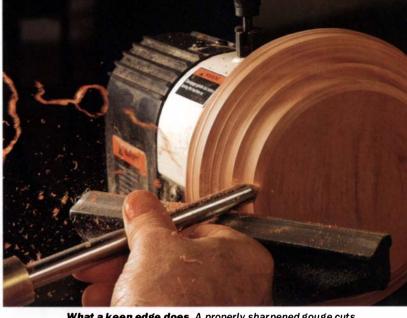

What a keen edge does. A properly sharpened gouge cuts efficiently and doesn't need a lot of muscle to do its work.

to swing the gouge from side to side. As a result, the gouge will vibrate when used and will dull quickly.

I believe it's better to grind gouges freehand. The technique described here, which I adopted after watching my friend and master turner Stuart Batty, is simple, effective, and easy to learn.

Set your grinder for the proper angles

Handbooks and experts give different recommendations for optimum bevel angles, but Batty and I have found through experience that spindle and bowl gouges work best with a bevel of about 40°. As it happens, that magic number represents the bevel angle, the amount of side-to-side movement you make when grinding, and the amount of bevel on the top side. Here's how to set up your grinder to get a consistent 40° bevel.

First, mark guidelines on the grinder platform 40° left and right of the center of the grinding surface. They

1. Set up the grinder to get a consistent 40° bevel



Make a template. Cut one corner of a piece of scrap at a 40° angle and use it to mark the grinder platform.



Angle the grinder platform. Use trial and error to set the platform at a 40° angle (or close to it), which will be the bevel angle on the gouge.



Grind the nose to check the angle. Test the platform angle by lightly grinding the nose of the gouge, then checking the result with a protractor or angle gauge.









READER SERVICE NO. 64









READER SERVICE NO 16

wood turning continued

2. Flatten the cutting edge






Start a new cutting edge. With the gouge's flute facing down, grind away the cutting edge. The resulting thin face creates a guide for the last stage of sharpening.

3. Grind the bevel

To sharpen the edge, start with the gouge centered on the grinder platform in line with the grinding wheel. Roll the gouge while simultaneously swinging it to the side to the 40° mark on the grinder platform. Keep the gouge flat on the grinder platform to maintain a consistent grinding angle. Sharpen one side at a time. Finish by blending in the bevel.



will help you get a consistent side-to-side sweep. Make a template from scrapwood cut to the same size as the platform. Mark the guidelines with an indelible marker.

Next, adjust the angle of the platform. Set it by eye to an angle that looks close to 40°, then test it by grinding the bevel on the nose of the gouge. Check the result with an angle gauge or protractor, and tweak the platform angle as needed. Don't worry if the angle isn't exact; a couple of degrees either side of 40 won't matter. Once you have the platform at the correct angle, grind the bevel on the nose again and recheck it.

Grind a fresh cutting surface

The next stage of grinding deliberately flattens the cutting edge so you will have a fresh surface to grind back to. Hold the tool in line with the grinding wheel with the flute face down on the platform. Lift the gouge from the platform slightly as you pass it over the wheel a couple of times; that will create a slight convex surface overall. If you hold the gouge against the platform the whole time, the wheel will leave a concave surface, which gives the gouge a tendency to catch in the work.

To sharpen the edge, roll and swing

Begin with the gouge in line with the grinding wheel and the flute facing up. Keep the gouge flat on the grinder platform, holding it by the metal just above the ferrule to keep the grinding angle consistent. If you hold the tool by the handle, you may be inclined to lift it off the platform, thus changing the angle.

Roll the gouge counterclockwise while moving it to the left. You want to end with the flute facing to the left and the gouge lined up with your 40° line on the left side of the grinder platform. As you bring the gouge up to the line, be careful not to roll it too far; if you do, you'll make the end of the bevel convex.

Repeat the maneuver, rolling the gouge clockwise while moving it toward the other 40° mark.







Start with the flute facing up and the tool centered on the grinder platform. Sweep the gouge in an arc to the left, simultaneously rolling the tool so that the gouge faces left. End at the 40° guideline on the grinder platform. Then sweep and roll the gouge to the right.



Over 70 years ago, the Titebond brand of wood glues was launched with the industry's first ready-mixed hide glue. Since then, generations of woodworkers have relied on Titebond for superior results.

We have built trust through consistent and sustained reliability. And that's something worth passing down to future generations.





The Trusted Choice for Generations

1-800-347-4583 • titebond.com



- 1. Adjustable Exhaust
- 2. Protective Side Bumpers
- 3. Large Dia. Cylinder for Extra Power
- 4. Adjustable Counter Sink
- 5. Large Sight Window
- 6. Anti-Dry Fire Mechanism
- 7. Integral Nose Safety
- 8. Shoots 23 Ga. Pins 5/8" to 2"
- 9. Cushion Grip
- 10. Comes With Carry Case
- 11. Comes With Plastic No-Mar Nose Piece


Distributed by Direct Sales Ltd. PH 604.876.9909 FAX 604.876.3914 WEB www.c.



READER SERVICE NO. 28

SPECIAL NEWSSTAND-ONLY PUBLICATION

Smart tool buying begins here



Now you can have the new 2007 Tool Guide for a small investment that pays off by helping you make smart buying decisions. Your 2007 Tool Guide is completely updated. So you'll always know what to look for when purchasing a chop saw, a cordless nailer, or the newest battery-powered drill.

Test-drive the latest tools before you buy with straight talk from our editors, tool users, and industry pros! Now better than ever, it's the only place to get:

- · Unbiased tool reviews and ratings,
- Useful comparisons
- · Reliable buying advice

Order now! Only \$9.99 Product #015004 Call 888-304-6051

or visit The ToolGuide.com/FW



This special issue is not part of any regular magazine subscription. Plus \$3.50 s&h. Payable in U.S. funds © 2006 The Taunton Press





READER SERVICE NO. 29



READER SERVICE NO. 175


Keep your Fine Woodworking back issues looking brand new.



Store your treasured copies of Fine Woodworking in slipcases for easy reference again and again! Bound in dark blue and embossed in gold, each case holds more than a year's worth of Fine Woodworking. Only \$8.95 (\$24.95 for 3, \$49.95 for 6).

Postage and handling additional. CT residents add 6% sales tax, Canadian residents please add 7% GST.

To place an order using your credit card, call 1-800-888-8286. Outside the U.S. and Canada call 1-203-426-8171.

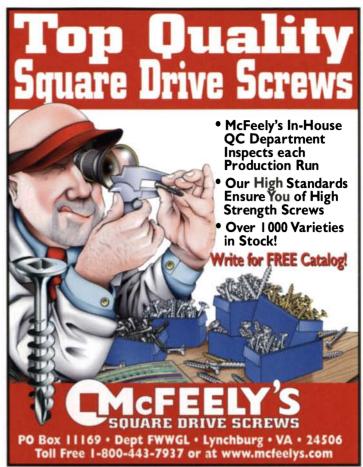

READER SERVICE NO. 41



READER SERVICE NO. 109

master class

A faceted Ruhlmann leg

BY AARON RADELOW

In Paris during the early years of the last century, Emile-Jacques Ruhlmann was "it" when it came to Art Deco design. One of his signature designs was a torpedo-shaped, multisided leg that attached to the corners of tables or cabinets. While looking through a book on Ruhlmann furniture, one of these *fuseaux à facets*, or spindle legs with facets, caught my attention. I was lured by the simplicity of their graceful curves, but I was shocked to learn that it took Ruhlmann's top craftsman needed a week to create each leg.

Intrigued to discover their hidden complexity, I decided to take the plunge and to build a cabinet incorporating four of these legs. With the aid of various jigs, I broke down construction into manageable sections that, while still time-consuming, are not that difficult.

The leg's core consists of eight pieces

You'll need to create a full-scale drawing of the whole piece first. Use a thin strip of wood or metal to lay out the fair curve of the leg's profile. At the leg's widest point, draw a line perpendicular from the outside edge to the midpoint of the leg. Draw seven other lines of equal length radiating out from this midpoint and connect them at the ends to form an octagon. This will be your guide for making the eight sections of the leg.

Cut the leg components—Traditional Ruhlmann legs were veneered, so the core should be made from strips of stable and well-seasoned rift-sawn white oak or poplar. If you prefer a more contemporary look, use cherry or maple for the legs and skip the veneering. In either case, start by milling rectangular strips that are the same width as each segment in the octagon, slightly thicker than the outside edge of one facet, and about ¼ in. longer than the leg. Make parts for two extra legs to allow for testing and waste.

I make a jig or sled to run these strips through my planer to create isosceles triangles with two base angles of 67.5° and a top angle of 45° (see drawing, facing page). All eight triangles must be identical so that when dry-fitted together they create a solid leg that matches the cross-section drawing.

Sources of Supply

VINYL AND HOLLY STRINGING

www.doverinlay.com 301-223-8620

VENEER


www.certainlywood.com 716-655-0206


OLD BROWN GLUE

home.pacbell.net/ ebeniste/gluepage.htm 619-298-0864


HIDE GLUE

Gram strength 192 for hammer veneering www.milligan1868.com 518-762-4638






A full-size drawing. Use a flexible guide to fair the leg's curve. Then draw the octagonal cross-section at the leg's widest point. This view is used to size the eight sections that form the core.

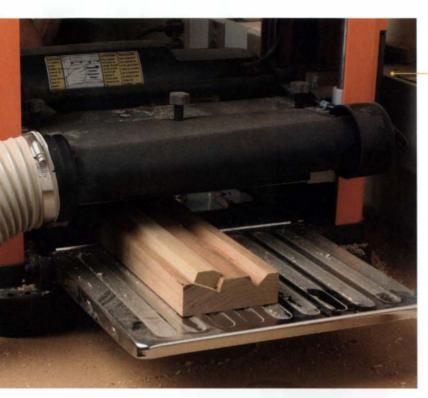


Make the leg segments


STEP 1: USE A SLED TO ANGLE THE SEGMENTS

To create the eight triangles that form an octagonal leg, place each rectangular blank on a sled and run it through the planer in two positions.






Place a rectangular blank in the first channel and run it through the planer until you create a single flat surface across the top of the blank.



Place the just-planed surface face down in the second channel and run it through the planer until you have created an isosceles triangle.



Form the leg's profile—To cut the

curved profile of the leg on each triangle, you'll need a jig for the router table or shaper. The base of the jig can be made from \(^1\fmathbf{4}\)-in. or \(^3\text{8}\)-in. plywood. It should be about 5 in. wide and 4 in. longer than the leg. Cut the leg's profile on the base's front edge; the bearing on the pattern-cutting bit will run against this edge. The jig's top section should be about 1 in. thick by 3 in. wide, slightly longer than the leg component, made from pine or some other softwood.

On the tablesaw, cut a 45° wedge into the edge of the jig so that a triangular leg section will fit snugly and will be flush with the outside edge of the jig. Glue the



Into the router jig. Use a pin nailer to secure each leg section. To make the pins easier to pull out, Radelow attached a binder clip as a pivot point for angling the gun away from the work.



Work outward to the ends. To avoid tearout on the top of the leg, begin in the middle and rout the bottom of the leg conventionally. Then profile the top of the leg, working away from the center, using a climb-cut and keeping a firm grasp on the jig.



Roll up the leg. After shaping the eight sections for each leg, dry-fit them with masking tape to check for symmetry.

master class continued

Add veneer and stringing

Apply the veneer. Because clamping the veneer to the triangular leg section would be very difficult, the easiest way to apply the veneer is with hide glue and hammer veneering.





Trim the veneer. Use a laminate trimmer with an adjustable base to remove most of the overhanging veneer.

two parts of the jig together so that the top part is flush with the widest part of the base. On the bandsaw, cut the leg profile onto the top part of the jig, staying just outside the base line.

When you place the leg blank back into the jig, it should be flush only at the widest section of the jig. Secure the blank temporarily in the jig using a pin nailer. To make it easier to remove the pins later, the pins should only just penetrate the workpiece, and the front of the pin nailer should be propped to keep the heads of the pins exposed.

Remove the bulk of the wood on the bandsaw, and starting in the middle of the leg, run the right-hand or lower end of the leg past the router bit from right to left. If you try to run the top end of the leg into the bit in this direction, you will be going against the grain and almost certainly will get tearout. Instead, do a climb-cut on the top half, moving the jig from left to right. When done, remove the pins with pliers to release the shaped component and test it against your full-scale drawing.

Veneer and inlay one section at a time

With the core components shaped, it's time to veneer them. Because you'll be gluing eight pieces together, there probably will be misalignment that must be corrected by sanding. Most


burl veneers, such as this amboyna burl, are thick enough to allow for sanding, but standard veneers are too thin; use special ¹/16-in.-thick veneer (see Sources of Supply, p. 106).

Make a pattern of the outside face of a leg section and cut out the veneer using either a veneer saw or a scrollsaw. The veneer should overhang the section about \(^{1}\)8 in. all the way around.


I build a cradle with a 45° groove to hold each piece while I hammer-veneer it using hot hide glue. Once the veneer has dried, trim the overhanging edges flush. I use a laminate trimmer with a tilting base and a new flush-trimming bit. The tapered ends won't guide the bit's bearing, so I sand these sections and clean up the whole piece on P150-grit sandpaper glued to a flat surface. Don't sand too much or you'll spoil the alignment with the other pieces.

One side of each section gets stringing—To emphasize the octagonal shape, eight lines of stringing run down each leg. The





A groove for stringing. Use a rabbeting bit in a router or laminate trimmer to create a small rabbet on one side of each leg section for the stringing.

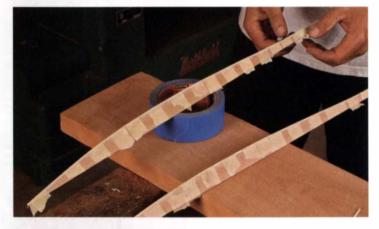



Apply the stringing. A thin bead of glue and plenty of masking tape secures the ivory or holly stringing in each leg section (above). The rabbet should be very slightly shallower and narrower than the stringing so that the latter can be sanded to final size (left).



afraid to show its teeth.

Nearly 3" cutting depth and pure power at your fingertips.





Slip clutch protects gears and helps prevent kickbacks



FastFix saw blade changing system



Tool-less adjustment for zero play on the guide rail



Precise depth adjustment to the millimeter



Splinter guard for clean cuts on both sides of blade

TS 75 EQ PLUNGE SAW

Cut through your workload like never before with Festool's new TS 75 plunge-cut saw. Take on bigger projects with our largest cutting depth yet -2.15/16" or 2.3/4" with the included guide rail. And with 13 amps of adjustable power, the TS 75 has plenty of muscle to spare and so will you, since it weighs less than 14 pounds. A return stop and slip clutch drastically reduce the effects of kickbacks, making the TS 75 much safer to use. The splinter guard and guide rail make glue-ready cuts a reality. Add it all up and you have a fierce, versatile saw that's easy on the user and tough on everything else. To learn more about the TS 75 and the entire Festool system, contact us or visit your local Festool dealer today.



Fasten your tool belts.

FIND YOUR DEALER | www.festoolusa.com/dealers | 888-337-8600

FESTOOL

READER SERVICE NO. 83

TS 75 EQ plunge-cut saw


master class continued

Assemble the leg



Assemble in pairs. Glue two leg sections at a time into quarters.





Each leg has a notch. Cut off the top of one of the quarter sections to create the notch that receives the corner of the cabinet.





Glue the halves together.

Assemble the sections. Glue the quarter sections in pairs to form halves of the leg. When dry, glue the halves together to complete the leg.



traditional material is ivory (you can buy certified legal ivory online at eBay), but holly or vinyl are acceptable and are easier to use because they typically come in longer lengths.

Run a rabbet slightly less than the thickness and width of the stringing into one outer corner of each leg section (see drawing, p. 108). To cement the stringing into the rabbets, I use Old Brown Glue, a liquid hide glue with extended work time. The next day, sand the inlay flush with the leg segment.

Assemble the legs and add the shoes

Gluing eight sections at once would be messy so I take two sections, apply hide glue sparingly to both joining faces, and tape them together with masking tape, making sure they are as flush as possible. Allow the quarters to dry overnight.

Take one quarter and cut away the top to form the notch for the cabinet's corner. Now glue the four sections into halves, and then the halves to form a whole. Cut the leg to length on the tablesaw, propping up the foot so the cut will be square.

To make the foot, take a ¾-in.-sq. by 2-in.-long piece of the material you used for the stringing. Turn it on the lathe to create a taper that will follow the shape of the leg, with the connecting end 1/64 in. larger in diameter than end of the leg. While at the lathe, drill a small hole in the foot for a dowel or a piece of threaded rod, and a matching hole in the end of the leg. Glue the foot in place.

Now extend the leg's octagonal flats onto the foot using a small sanding block. After everything is faired to your liking, sand the whole leg, one facet at a time, using P150-grit paper. This will also transfer the corners to the center of each inlay. With the cabinet upside down, attach the legs using Old Brown Glue and strap clamps.

The last step is to add the small ivory bead at the top of each leg. I use a ball burr bit in a handheld drill, but you could use a gouge to create a small crater that will enclose about a third of the bead. Apply a high-gloss traditional finish, and admire the results.



A turned foot. Turn the tapered foot until it is just larger than the bottom of the leg. Join the two with either a dowel or a threaded rod (above). Use a sanding block to extend the leg facets onto the foot (right).



Fine Woodworking invites you to

Explore 17th century joined and turned furniture

THE 2007 COLONIAL WILLIAMSBURG CONFERENCE



Learn the secrets of recreating 17th century turned and joined furniture from Colonial Williamsburg Historic Trades joiners and guest experts.

The 9th annual conference celebrates the 400th anniversary of the first permanent English settlement in North America.

This conference will explore how joiners used riven green wood to produce framed panel pieces such as cupboards, chests, and complex wainscot chairs. And also show how turners created both straightforward and complicated components of chairs, stools, and table parts.

WORKING WOOD BEFORE THE 18TH CENTURY:

2 Sessions

January 10-13 and 14-17, 2007

For more information, call Colonial Williamsburg Continuing Education 800-603-0948

Or go online: www.ColonialWilliamsburg.org/ContEd

PRESENTERS AND DEMONSTRATIONS

- Green woodworker and teacher John Alexander
 (author of Make a Chair from a Tree) will team up with joiner, Peter Follansbee, to discuss working green wood and build a joint stool to illustrate basic techniques.
- Plimoth Plantation's Peter Follansbee will also construct a carved oak box typical of the period.
- Colonial Williamsburg Historic Trades joiner
 Ted Boscana and master carpenter Garland Wood will build a large court cupboard to illustrate case making.
- Turner and teacher Ernie Conover (author of *The Lathe Book* and *Turning for Furniture*) will produce components for the cupboard and demonstrate examples of the complex turning typical of the period.
- After-dinner comments and Q&A will be presented by Asa Christiana
 of Fine Woodworking.







Taunton's Complete Illustrated Guides: the ultimate reference for every skill level



Taunton's Complete Illustrated Guides set a new standard for woodworking reference books. Each title provides comprehensive coverage of a major topicalong with: detailed and in-depth information direct from hands-on professionals, step-by-step photos, instructive captions, and helpful sidebar stories. The perfect gift for woodworkers, from beginners to advanced.

Additional Titles in the Series

Furniture & Cabinet Construction Andy Rae

Hardcover Product #070534 \$39.95

Shaping Wood Lonnie Bird

Hardcover Product #070533 \$39.95

Joinery Gary Rogowski

Hardcover Product #070535 \$39.95

Choosing and Installing Hardware Robert Settich

Paperback Product#070647 \$29.95

Box Making Doug Stowe

Paperback Product #070721 \$24.95

Sharpening Thomas Lie-Nielsen

Hardcover Product#070737 \$39.95

Using Woodworking Tools

Lonnie Bird Hardcover Product #070729 \$39.95

Turning Richard Raff an

Hardcover Product #070757 \$39.95

Workingwith Wood Andy Rae

Hardcover Product #070765 \$39.95


Period Furniture Details Lonnie Bird

Paperback Product #070708 \$27.00

Jigs & Fixtures Sandor Nagyszalanczy

Hardcover Product #070832 \$39.95


3-Volume Hardcover Slipcase Sets



Volume I

- Joinery Furniture & Cabinet
- Construction
- Shaping Wood Product #070665

\$120.00




Volume II

- · Finishing
- Sharpening · Using Woodworking

Product #070817 \$120.00

Newest Books in the Series



Routers Paperback Product #070827 \$24 95



Woodworking Lonnie Bird, Andy Rae Thomas Lie-Nielsen Jeff Jewitt, Gary Rogowski


Hardcover Product #070830 \$29.95

FREE shipping on orders of \$50.00 or more

Call 800-888-8286 and mention offer MS80014 Or visit: Taunton.com/CIG

Offer valid from 10/2/06-11/23/06. Shipping and handling extra. Payable in U.S. funds.





READER SERVICE NO. 110

Keep your Fine Woodworking back issues looking brand new.

Store your treasured copies of Fine Woodworking in slipcases for easy reference again and again! Bound in dark blue and embossed in gold, each case holds more than a year's worth of Fine Woodworking. Only \$8.95 (\$24.95 for 3, \$49.95 for 6).


Postage and handling additional. CT residents add 6% sales tax. Canadian residents please add 7% GST.


To place an order using your credit card, call 1-800-888-8286.


Outside the U.S. and Canada call 1-203-426-8171.



READER SERVICE NO. 127

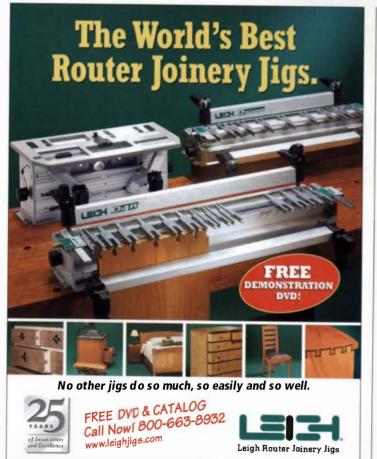

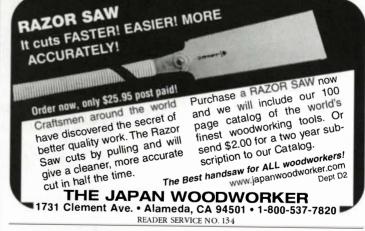



Paul Schürch, Michael Cullen, Nora Hall, Garrett Hack, Julie Godfrey and many more! www.wnwoodworks.com

(714)993-4215

Southern California's Premier Woodworking School

READER SERVICE NO. 61

COLLEGE of the REDWOODS Fine Furnituremaking

Continuing the Tradition

Apply March 1-31

for further information: College of the Redwoods 440 Alger Street Fort Bragg, CA 95437 707.964.7056

www.crfinefurniture.com



NORTHWEST

LUMBER, PLYWOOD, VENEERS 503-695-3283 WWW.NWBAMBOO.COM



THE FURNITURE INSTITUTE of MASSACHUSETTS

Study with Fine Woodworking author Philip C. Lowe • Classes range from 1 day to 1 week to 2 and 3 year mastery programs.

· See new class schedule on:

(978) 922-0615 www.furnituremakingclasses.com



European tools for the discriminating craftsman See the entire line online or call for a free catalog

www.Festoolonline.com 1.800.669.5519

AFRICAN EXOTIC HARDWOODS

BEST PRICES - DIRECT FROM SOURCE

 EXOTIC LUMBER, BLANKS AND BURLS

- LARGE OR SMALL ORDERS WELCOME SHIPPED PROMPTLY NATIONWIDE

CONTACT FABS AND MIKE TODAY (828) 658-8455 TEL. CORMARK INTERNATIONAL (828) 645-8364 FAX. 181 REEMS CREEK ROAD, WEAVERVILLE, NC 28787

High Style Furniture Classes and Carving Classes



in Northern Virginia www.georgeslack.com George L. Slack - Instructor

asprdts@infionline.net

(540) 349-8633

ASK ABOUT




The Fine & Creative Woodworking Program at ROCKINGHAM COMMUNITY COLLEGE

is an internationally recognized associate degree & certificate program. Instruction in hand-tools, furniture, construction, shop start-up, operation & much more.

PO Box 38, Wentworth, NC 27375-0038 Phone: (336) 342-4261, ext. 2178. www.rcc.cc.nc.us/woodwork/homepage.html AAEEOC







SCHOOL OF WOODWORKING

DISCOVER the ART of HAND TOOL WOODWORKING 3-Day Finishing & Restoration Courses 1-12 day Courses to Advanced Levels Catalogue of Courses • (254) 799–1480 In Central Texas www.creeschool.com

GOOD HOPE HARDWOODS, Inc.

"Where Fine Woodworking Begins"

4/4-24/4 Custom Cut Wide Matched Sets Custom Flooring Available

Specializing In: Figured & Plain Cherry, Walnut & Claro Walnut, Tiger Maple & 58" Wide Bubinga Plus Many Other Species

1627 New London Rd., Landenberg PA 19350 Phone 610-274-8842/Fax 610-255-3677


www.goodhope.com

We Provide Personalized Service












Create professional 3D blueprints for Mac and Windows

fw.gizmolab.com/11





WORKBENCH



TEL# 201-724-6005 http://www.andreoumachinery.com/workbenches.htm



HIBDON HARDWOOD, INC.

www.hibdonhardwood.com

Direct Importers of Central American Exotic Hardwoods

St. Louis, Missouri

(314) 621-7711

23 Gauge Pinner & Brad Nailer



⇒Shoots Pins and Brads from 1/2" to 1 3/16"

⇒ Excellent for:

Cabinets, Decorative molding

all 800-930-3998 Trident Associates Company

Trend Airshield

Airware America

219 240th St., Elbow Lake, MN 56531 3M Authorized Distributor

mail: airware@runestone.net www.airwareamerica.com

1-800-328-1792



THE BEALL WOOD THREADER

Cuts perfect threads every time.

Six different sizes



541 Swans Road, N.E. Newark Ohio 43055 Toll Free 1-800-331-4718 Fax 1-740-345-5880 www.bealltool.com



QUARTERSAWN HARDWOODS

HIGHLY FIGURED LUMBER

Ash, Cherry, Hard Maple, Red Oak, White Oak, Walnut, Sycamore, Mahogany, Hickory, and Birch. Also, many Exotic Species in Stock. NEW We now have Curly Bubinga, Curly Makore, + other figured exotics.

WEST PENN HARDWOODS, INC.

(888) 636-WOOD (9663) www.westpennhardwoods.com Oregon Black Walnut

GOBL WALHUT PRODUCTS

5016 Palestine Rd Albany, OR 97321 MENANC BY APPOINTMENT ONLY

(541) 926-1079

Wide lumber - 4/4 through 16/4 Turning - Carving Stock **Gunstocks** - Veneer Instrument Grade Lumber No Minimum Order

Web Site: www.gobywalnut.com

Dyes and Pigments natural earth pigments
 natural plant dyes alcohol-based metal-complex dyes Free catalog of woodfinishing supplies Kremer Pigments, Inc. 247 West 29th Street New York, NY 10001 - (800) 995 5501 www.kremer-pigmente.com





height applications and chemical applications

18,000 parts. 3D-CAD. eStore. Find it all at www.jwwinco.com.

J.W.WINCO,

Phone 800-877-8351 Fax 800-472-0670

2007 Ozark Folk School Workshops

March 18-23, 2007

Classes in:

- Country Chairmaking
 White Oak Baskets
- Gourd Banjo Construction Spirit Carving Additional Classes in Craft, Herbs and Traditional Music.

Call or write for catalogue.



P.O. Box 500, Dept. FW | Mountain View, AR 72560 870-269-3851 | 1-800-264-FOLK (V/TT) www.ozarkfolkcenter.com

Andrews Toolworks. Inc. **Huge Selection of Stock**

www.routerbitsonline.com 800.821.8378



WWW.CLOCKKIT.COM

CLOCK KITS & Clock Making Supplies

Call for free catalog

1-800-653-1930




Cabinet Hardware, Glass Mosaic Tile, Ceramic Sink

* High Quality Stainless Steel Bar Pull, Bin Pull and Cabinet Knob Contempo Living Inc 1220 Santa Anita Ave Unit A, South El Monte CA 91733 Order Online or Call 626-450-0560 www.contempolivinginc.com



Philadelphia Furniture Workshop Hands-On Instruction; All Levels Mario Rodriguez, Artist in Residence www.philadelphiafurnitureworkshop.com 215-849-5174





CROWN PLANE COMPANY

TRADITIONAL BENCH MADE PLANES

JACK..SMOOTH..SCRUB..SCRAPERS..BLOCK CHAIRMAKERS TRAVISHERS..COMPASS PLANES

18 Chase Street South Portland, ME 04106 (207) 799-7535

Order Online www.crownplane.com



CUSTOM BRANDING IRONS

HIGH QUALITY, DEEP ENGRAVED BRONZE DIES LONG LASTING - INDUSTRIAL DUTY HEATERS

NOT THE CHEAPEST - QUALITY COSTS MORE FREE BROCHURE AND SAMPLE BRANDS

ENGRAVING ARTS 800-422-4509 fax: 707-984-8045 P.O. Box 787 www.brandingirons.net Laytonville, CA 95454 e-mail: clem@brandingirons.net

GILMER WOOD CO. Quality Domestic & Exotic Lumber

- Logs, blanks, squares Over 50 species in stock
- Thin woods, Assortments, Books
 Musical Instrument woods

Phone 503-274-1271

2211 NW St. Helens Rd, Portland OR 97210 Fax 503-274-9839 www.gilmerwood.com



Architectural, Cut to Size & Specialty Panels, Tabletops, Doors & Veneer

(800) 875-7084 www.woodriverveneer.com

BUILD AN HEIRLOOM

with Michael Dunbar

Learn with the Master.

Craftsman - Teacher - Author — 35 Years —

Week-long Workshops Held Year-round

44 Timber Swamp Road Hampton, NH 03842

603-929-9801 thewindsorinstitute.com



WINDSOR CHAIR WORKSHOPS Nov 17-20 & Dec 8-11 Sack-back Chair

lim Rendi, Tel: 610-689-4717

www.philadelphia-windsor-chair-shop.com pphilawindsor@aol.com

IMPORTED & DOMESTIC HARDWOODS

LUMBER • PLYWOOD • VENEERS • TURNING BLOCKS • BURLS

FINE WOOD CARVINGS

and ARCHITECTURAL MOLDINGS



Freeport, NY 11520

Over 80 species of hardwood in stock CALL FOR PRICE LIST:

866-378-2612 FAX 516-378-0345

www.woodply.com







Call or e-mail for course information. 360-385-4948

LEARN CRAFTSMANSHIP IN WOOD

Programs from one day to twelve months.

www.nwboatschool.org





SLATE POOL TABLE

Plans • Parts • Slate • Accessories

Build your own custom built pool table at a fraction of the cost of retail

www.workbenchbilliards.com

St. James Bay Tool Co.

#271 Router Plane \$34.95+s/h

800-574-2589

stjamesbaytoolco.com





BIRDSEYE AND TIGER MAPLE Sawmill Direct • Slabs to 40" Wide • 75+ Unusual Native & Imported Species • Matching Flitches • Burls & Turning Blocks Order 75 Domestic and Imported Species 4/4 -16/4 • Custom Flooring & Wainscotting • No Order Too Large or Too Small 858 Scotland Road, Quarryville, PA 17566

PREMIUM WALNUT, CHERRY, CURLY CHERRY,

& Instrument Grade Woods

www.groffslumber.com 1-800-342-0001 • 717-284-0001 • Fax 717-284-2400

National & International Shipping



Go online for product information

Find our advertisers' web sites quickly and easily on our online Advertiser Index at

www.finewoodworking.com

Fine Wood Working

MISUGI DESIGNS



Japanese Tansu & Cabinet Hardware Japanese Woodworking Tools Japanese Paper

Visit us at-


www.misuqidesigns.com

Tel: 707-422-0734 / Fax: 707-425-2465



TIMBER WOLFTM **Band Saw Blades**

Swedish Silicon Steel ~ 1/8" - 2" www.Suffolkmachinery.com Free Catalog ~ 800-234-7297





Apprenticeship: Art-Furniture Construction/Design, one year-fulltime, hands-on, professional training & education.

> 6525 North Clark St., Chicago, IL 60626-4001 Ph: 773,338,1746 www.chicagobauhaus.org



· No minimum quantity · Online catalog www.swivel-chair-parts.com











phone/fax 609-587-7187 9 John Lenhardt Road Hamilton Square, NJ 08690

www.meaproducts.com

Blue Spruce **Toolworks** Beautiful hand tools for precision joinery www.BLUESPRUCETOOLWORKS.com


DOVETAILED DRAWERS
Reasonably priced method to distinguish your cabinets.

• Custom-sized width and depth
• 1/2" solid maple, assembled and sanded

2-coat catalyzed finish available Quick service, shipped UPS

EAGLE WOODWORKING

130 East Street, Tewksbury, MA 01876-14 FAX (978) 640-1501 (800) 628-4849











CLASSIFIED

The Classified rate is \$9.50 per word, 15 word min. Orders must be accompanied by payment, ads are non-commissionable. The WOOD & TOOL EXCHANGE is for private use by individuals only; the rate is \$15/line, minimum 3 lines. Send to: Fine Woodworking Classified Ad Dept., PO Box 5506, Newtown, CT 06470-5506. FAX 203-270-6310, Ph. (800) 926-8776, ext. 3310 or email to ads@taunton.com Deadline for the January/February 2007 issue is October 25, 2006.

Business Opportunities

PHILADELPHIA Spaces available in fully equipped woodshop. Spraybooth, clamps, utilities, etc. www.stentonguild.com (267) 987-2546.

Hand Tools

EXQUISITE HAND-CRAFTED woodworking mallets for the discerning craftsman. Check out our beautiful selection at www.millstwoodworks.com

HIGHLANDHARDWARE.COM, the world's largest selection of hand planes, plus thousands more fine hand tools.

WOODCARVERSWAREHOUSE.COM tools, books, supplies. 1-888-901-8099. "Lifelong hobbies start here!" Class info also available!

ANTIQUE & USED TOOLS. Hundreds of quality hand-tools. Stanley plane parts. Visa/MC. BOB KAUNE. www.antique-used-tools.com. (360) 452-2292.

PETE NIEDERBERGER - Used and Antique tools and parts. A few just in highly tuned Stanley planes. (415) 924-8403 or pniederber@aol.com Always buying!

Help Wanted

HIGHLY SKILLED CARPENTERS wanted for challenging luxury estate type work in the D.C. area. Call Greg Fritz at 800-726-4876. Visit www.horizonbuildersinc.net

PRECISION SHOP needed for small production runs of detailed 1/64-in-tolerance light fixtures. Please email photos of past work. Laurel Canyon Lights, production@laurelcanyon.com

Miscellaneous / Accessories

GLASS SOURCE FOR WOODWORKERS. Glass and mirror custom cut, beveled, edged, grooved or fabricated to your specifications. Shipped direct from our shop to yours. For a free brochure, inquiries and orders, call Glass Source: 1-800-588-7435. www.theglasssource.net

WOODSLICER.COM, resawing blade rated best-performing 1/2-in. bandsaw blade by *Fine Woodworking*. 800-241-6748.

Instruction

PENLAND SCHOOL OF CRAFTS, in the spectacular North Carolina mountains, offers one-, two-, and eightweek workshops in woodworking and other media. (828) 765-2359; www.penland.org

WINDSOR CHAIR CLASSES: 1 week intensive. Also weekend turning classes. Lodging and meals included. Midwest. www.chairwright.com

LONG ISLAND SCHOOL of Classical Woodcarving New York, beginners and advanced classes, European instructor. (631) 225-1666. http://homepage.mac.com/walterc530/

COME TO LEARN IN SCOTLAND - The Chippendale International School of Furniture offers a 30-week intensive career program in Design, Making and Restoration. For further information phone: 011-44-1620-810680 or visit www.chippendale.co.uk

NEW ENGLAND SCHOOL of Architectural Woodworking. 35-week career training in architectural woodworking or 6-week summer intensive for the serious enthusiast. (413) 527-6103. (MA) www.nesaw.com

1:1 TEACHER-TO-STUDENT RATIO at fine woodworking school. (519) 853-2027. www.passionforwood.com

BENJAMIN HOBBS Furniture Making Classes. Queen Anne and Chippendale chairs, chests, beds, tables, more. Hertford, NC. (252) 426-7815. www.hobbsfurniture.com

HANDS-ON COURSES in beautiful Maine. Beginner through advanced. Workshops, Twelve-week Intensive, Nine-month Comprehensive. Center for Furniture Craftsmanship (207) 594-5611, www.woodschool.org

Musical Supplies

BUILD YOUR OWN violin, guitar, or dulcimer! Free catalog featuring kits and all the tools, finishing supplies and instructions needed to build your own instrument. Stewart-MacDonald, Box 900-F, Athens, OH 45701. Call 800-848-2273. www.stewmac.com

Plans & Kits

CARLYLE LYNCH MEASURED DRAWINGS—Museum and private collection furniture plans by Carlyle Lynch. Catalog \$2. P.O. Box 13007, Arlington, TX 76094. (817) 861-1619.

FULL SIZE FURNITURE LAYOUTS Drawn by: Philip C. Lowe. Catalog \$3. (978) 922-0615. 116 Water Street, Beverly, MA 01915. www.furnituremakingclasses.com

Power Tools

CADEX & NIKLE pin nailers & pins, Flexeel air hose & fittings at www.floydtool.com

LAMELLO BISCUIT JOINERS and Accessories/Parts/ Repairs. Best prices, most knowledgeable. Call us for all your woodworking & solid surfacing needs. 800-789-2323. Select Machinery, Inc. www.selectmachineryinc.com

NAILERS AND STAPLERS at www.nailzone.com Top brands of tools and fasteners. Visit our website. (800) 227-2044.

Wood

COMPRESSED SOLID HARDWOODS ready for cold-bending by hand! Oak, cherry, walnut. www.extremewoodbending.com

MAHOGANY FROM OUR Caribbean plantation, Honduras and Cuban, extremely dense, figured, bookmatched flitches and logs. www.maderas.ca (905) 370-0170, (416) 817-1509.

TIGER MAPLE, MAHOGANY, cherry, walnut; plain and figured. Wide boards, matched sets, 4/4 to 24/4. 200-ft. minimum. (570) 724-1895. www.irionlumber.com

SHAKER OVAL BOX BANDS, sawn from solid cherry. Very high quality. www.shakerboxesnb.com Toll free: 1-877-503-4440.

CLARO WALNUT, BAY LAUREL, pecan, redwood and maple burl. Large slabs and blocks. Peter Lang, Santa Rosa, CA. 1-866-557-2716.

QUALITY NORTHERN APPALACHIAN hardwood. Custom milling. Free delivery. Bundled, surfaced. Satisfaction guarantee. Niagara Lumber. 800-274-0397. www.niagaralumber.com

COLLECTOR'S SPECIALTY WOODS "Rocky Mountain Dry" lumber, tops, burl slabs, flooring, blocks, bases-showroom/mill room/wood yard; www.cswoods.com (719) 746-2413. (CO)

SAWMILL DIRECT 100 species of exotics, turning, lumber, logs, slabs, musical instruments TROPICAL EXOTIC HARDWOODS OF LATIN AMERICA, LLC: Toll Free (888) 434-3031. www.anexotichardwood.com

WALNUT SLABS/CROTCHES Claro, myrtle, elm. Black acacia. 877-925-7522. From our sawmills. Gilroy, CA. www.bakerhardwoods.com

MESQUITE LUMBER (915) 585-7693.

LONGLEAF HEART PINE (antique). Flooring-lumber-millwork. Red cedar lumber & paneling. Lee Yelton: (706) 541-1039.

QUILTED, CURLY, SPALTED, Burled & birds-eye maple, figured claro walnut, figured myrtle wood, musical grade lumber and billets. Visit our online store at www.nwtimber.com or call (541) 327-1000.

DOMESTIC AND IMPORTED EXOTICS. For musical instruments, pool cues, knife handles and custom furniture. Price list. Exotic Woods, 1-800-443-9264. www.exoticwoods.com

BIRD'S-EYE AND CURLY MAPLE, 4/4 to 12/4 lumber, flitches, turning squares and blocks. Black walnut, cherry/quartersawn, and curly oak lumber. Dunlap Woodcrafts, Chantilly, VA. (703) 631-5147.

NORTHWEST'S FINEST BURL, maple, myrtle, redwood, buckeye. Table, clock slabs, turning blocks. (503) 394-3077. burlwoodonline.com

FIGURED CLARO WALNUT slabs, planks, blocks, dimensions suitable for small to very large projects. California Walnut Designs. 800-660-0203. www.woodnut.com

ATTENTION VA/MD AREA WOODWORKERS. K/D quartersawn sycamore, red & white oak. Cherry, walnut, elm, apple, and other domestic hardwoods. Herbine Hardwoods, Leesburg, VA. (703) 771-3067.

EISENBRAND EXOTIC Hardwoods. Over 100 species. Highest quality. Volume discounts. Brochure. 800-258-2587; Fax 310-542-2857; eisenbran.com

ALASKAN YELLOW CEDAR vertical grain. Douglas fir old growth vertical grain. Easy Creek Lumber Co. (541) 344-3275. www.easycreeklumber.com

WOOD AND TOOL EXCHANGE

Limited to use by individuals only.

For Sale

Fine Woodworking Issues 1-185 complete. Excellent condition. \$600. plus shipping & handling. Phone (320) 589-2508 (MN)

COCOBOLO, BIRDSEYE & CURLY CHERRY 4/4-16/4. Very finest quality. \$8-\$16/bf 10bf min. Former stock from jewelry box maker. Russ: (970) 375-7777.

Fine Woodworking - 1 to present \$600. Fine Homebuilding - 1 to present \$525. Fine Gardening - 1 to present \$350. S/H additional. (631) 376-4040 or mdrifkin@usa.net

Fine Woodworking: issues 1-186, excellent condition. Also, all issues of Home Furniture published by Taunton Press. All for \$500. demezza@aol.com. (724) 838-0849.

Fine Woodworking Issues 1-186, no missed issues. \$750. plus shipping. Morgan (408) 399-9028. (CA) moriane@aol.com

Wanted

Shopsmith over-arm pin router, must be very good condition and reasonably priced: Bob, Box 1189, Abingdon, VA. 24212, (276) 628-6591.

SMALL ADS YIELD BIG RETURNS

for advertisers featured in the Woodworker's Mart and Classified sections of *Fine Woodworking*. For more information call 800-309-8954

-	ik access to their websites	-	ADVERTISER INDEX at www.		aworking.com		
eader ervice No.	ADVERTISER, page #	Reader Service	No. ADVERTISER, page #	Reader Service I	No. ADVERTISER, page #	Reader Service N	o. ADVERTISER, page #
Ab	pacus Chair Parts, p. 117	57	Eagle Woodworking, p. 117	19	Kuffel Creek Press, p. 29	12	S.R. Wood, p. 117
170 Ac	ccurate Technology, p. 115	11	Edward R. Hamilton, Bookseller, p. 29	154	Kwick Kleen Restoration	165	SATA, p. 92
42 Ad	dams Wood Products, Inc., p. 29	5	Electrophysics, p. 92		Products, p. 101	89	Scherr's Cabinet & Doors,
34 Ac	dria Toolworks, Inc., p. 116		Engraving Arts, p. 116				Inc., p. 21
46 Ag	gazzani & Eagle Tools, p. 35			97	Laguna Tools, p. 12-13	111	School of Woodworking, p. 114
9 Ai	rware America, p. 115	125	Fein Power Tools, p. 97		Leigh Industries, p. 113	161	Screw Products, Inc., p. 29
160 Al	isam Engineering, p. 117	83	Festool, p. 109	126	Lie-Nielsen Toolworks, p. 21	101	Shaker Workshops, p. 95
90 Al	lred & Associates, Inc., p. 116	6	Festoolonline.com, p. 114	30	Lignomat Moisture Meters, p. 22	7	Sharp Tools USA, p. 114
141 Ar	mana Tool Company, p. 25		Fine Woodworking & Fine	21	Luthiers Mercantile	62	The St. James Bay Tool Co., p. 116
169 Ar	ndreou Machinery, p. 114		Homebuilding on DVD, p. 14-15		International, p. 25	52	Stanley Tools, p. 37
73 Ar	ndrews Toolworks, p. 115		Fine Woodworking.com, p. 99			116	Suffolk Machinery, p. 117
167 Ap	pollo Sprayers, Inc., p. 7	99	Forrest Manufacturing, p. 27	49	M.L. Condon Company, p. 116	64	Super Shop by Smithy, p. 101
85 At	ustralian School of Fine	147	Freud, p. 33	92	MEG Products, p. 117		
j	Furniture, p. 97	67	The Furniture Institute of		MLCS, Ltd., p. 21	94	Talarico Hardwoods, p. 117
			Massachusetts, p. 114		Makers-Marks, p. 116		Taunton Books, p. 112
23 Ba	all & Ball Reproduction		, ,	41	McFeely's Square Drive, p. 105	33	Tech Mark, Inc., p. 95
	Hardware, p. 92	17	General Manufacturing Co., Ltd, p. 17	112	Milwaukee Electric Tool Corp., p. 19	95	Thewindsorinstitute.com, p. 116
	arr Specialty Tools, p. 115		George L. Slack Instruction, p. 114	128	Mini Max USA, p. 23	66	Titebond Wood Glues, p. 103
	he Beall Tool Co., p. 115	137	German Timber, p. 11	127	Mini Max USA, p. 113		Tool Guide 2007, p. 104
	erea Hardwoods, p. 17	110	Gerstner & Sons, p. 113	82	Misugi Designs, p. 117	81	Toolmart, p. 116
	erkshire Veneer Co., p. 117	71	Gilmer Wood Company, p. 116	02	misugi Designs, p. 117	70	Tools for Working Wood, p. 22
		36		32	The Northern Alberta Institute, p. 21	172	
	ue Spruce Toolworks, p. 117	175	Gizmo Lab, p. 114	32			Tormek, p. 17
	osch Tools, p. 13		Gladstone Tools, p. 105	25	Northwest Bamboo, p. 114	168	Trend Routing Technology, p. 9
143 T	he Burgess Edge, p. 35	86	Goby's Walnut Wood Products, p. 115	35	Northwest School of Wooden		Trident Associates Company, p. 11
422 C	MT LICA Inc. A 20	174	Good Hope Hardwoods, p. 114	407	Boatbuilding, p. 116	E0.	Van II Clama A 25
	MT USA, Inc., p. 29	43	Gorilla Glue, p. 7	107	Northwest Timber, p. 25	56	Vac-U-Clamp, p. 25
	abinetparts.com, p. 117	78	Groff & Groff Lumber, p. 116	60	Norton Abrasives, p. 111	87	Vacuum Pressing Systems, p. 97
	enter for Furniture	152	Guillemot Kayaks, p. 117		olle til a la fri	38	Veto Pro Pac, p. 95
	Craftsmanship, p. 35		H 1904 - 26	98	Old English Academy of Fine	55	Virutex.com, Inc., p. 101
	ertainly Wood, p. 114	74	Hammer USA, p. 36		Woodworking, p. 114		
	hesapeake Light Craft, p. 97	163	Hartville Tool Woodworking, p. 36	39	Old Masters, p. 25	120	W. Moore Profiles, p. 101
	hicago Bauhaus, p. 117	47	Hearne Hardwoods, Inc., p. 22	54	Oneida Air Systems, p. 36	118	West Penn Hardwoods, p. 115
	assic Designs by Matthew Burak, p. 9	113	Hibdon Hardwood, Inc., p. 115		Onsite Productions, p. 92	50	West System, p. 95
	ockkit.com, p. 115	25	Highland Hardware, p. 95	59	Osborne Wood Products, p. 22	8	Western Dovetail, p. 115
	phasset Colonials, p. 7	48	Hoffmann Machine Co., Inc., p. 35	15	Outwater Plastics Industries, p. 97	58	Whitechapel, Ltd., p. 29
151 Co	ollege of the Redwoods, p. 114	145	Holbren, p. 7	53	Ozark Folk Center, p. 115	61	William Ng Woodworks, p. 113
Co	olonial Williamsburg					65	Williams & Hussey Machine
(Conference 2007, p. 111	171	ITP Tooling, p. 13	91	Panasonic Power Tools, p. 35		Co., p. 92
80 Co	onnecticut Valley School of	3	Infinity Cutting Tools, p. 95	140	Penn State Industries, p. 29	136	Wood Rat, p. 25
,	Woodworking, p. 117	135	Inside Passage School of Fine	144	Phase-a-matic, Inc., p. 9	37	Wood River Veneer, p. 116
131 Co	ontempo Living, p. 115		Woodworking, p. 95	150	Philadelphia Furniture	2	Woodcraft, p. 21
68 Co	ook Woods, p. 21	84	Internetlumber.com, p. 115		Workshop, p. 115	1	Woodcraft, p. 93
	ormark International, p. 114	14	Iturra Design, p. 9	122	Philadelphia Windsor Chair, p. 116	4	Woodcraft, p. 97
Cı	raft Supplies USA, p. 105			159	Porter Cable, p. 122-123		Woodfinder, p. 115
123 T	he Craftsman Gallery, p. 117	69	J.W. Winco, Inc., p. 115	155	Powermatic Tools, p. 2-3	44	Woodjoy Tools, p. 116
102 Cr	raftsman Studio.com, p. 114	109	JDS Company, p. 105	77	Pygmy Boats, Inc., p. 114	45	Woodmaster Tools, p. 97
142 Cr	rown Plane Co., p. 116	134	The Japan Woodworker, p. 113			119	Woodpeckers, p. 114
		16	JessEm Tool Co., p. 101	29	Quality Vakuum Products, p. 105	75	Wood-Ply Lumber Corp., p. 116
158 D	elta Machinery, p. 30-31					153	Woodworker's Source, p. 117
106 D	iefenbach Benches, p. 114	138	Kay Industries, Inc., p. 17	156	Rikon Power Tools, p. 101	166	Woodworker's Supply, p. 35
	iefenbacher Tools, p. 117	26	Keller & Company, p. 22	72	Rockingham Community	121	The WoodWorks Show, p. 114
	imitrios Klitsas, p. 117	164	Klingspor's Woodworking Shop, p. 92		College, p. 114		Workbench Billiards, p. 116
	irect Sales, Ltd., p. 104	28	Kreg Tool Company, p. 104	18	Rosewood Studio, p. 22		,,,
	he Dogwood Institute, p. 92	117	Kremer Pigments, p. 115	88	Router Bits.com, p. 36		
•	g, F. /-		0 ,1 ,		F. V.		

finish line

The impact of light on dyes and stains

BY TERI MASASCHI

hatever dye or pigment stain you use, it will fade or change color with exposure to bright light. The solution is not to swear you'll never stain wood again (after all, natural colors in wood are affected by light too), but rather to learn which coloring agents to use, how to use them, and what else you can do to preserve the intended color.

The degree of lightfastness varies enormously between different dye stains and pigmented stains. The problem is that many products contain both dyes and pigments, and the dyes fade faster. With time, the effect can be disappointing. With the right technique, you can stop dyeand-stain combinations from fading at different rates, and take advantage of the ultraviolet protection offered by some clear coats.

NGR dyes are more lightfast

When measuring lightfastness, many variables come into play, such as what substrate the dye is on, the concentration of the mix, and of course the type of light exposure. To give a rough indication of



Hidden color. The candlestick protected the tabletop from sun damage, preserving the original darker color.

the relative lightfastness of different dyes and stains, manufacturers use a scale from 1 to 8, with 8 being the most lightfast.

Dyes come in both powders and liquids, with the former divided by the solvent in which they dissolve: water, alcohol, or oil. As a group, powdered dyes have lower fade resistance; water-based dyes fall into the 2 to 5 range while alcohol and oil-soluble dyes range from 2 to 3. In general, powdered dyes in darker tones containing a lot of black are more lightfast than the medium to light tones of reds and blues.

The modern metallized dyes are even more lightfast. Better known as nongrain raising (NGR) dyes, they come either in ready-to-use strength (such as Solarlux) or 2-oz. liquid dye concentrates (such as TransTint or WizardTint). This group falls from 4 to 7 on the scale, with the very darkest approaching 8.

The older NGR stains did not have the lightfastness of today's products, hence the continuing belief that these alcoholbased stains are not very light resistant.

Pigments are fade resistant

As a group, pigment stains resist fading better than dyes. The actual pigments can be natural or man-made, with many of the former recognizable by earthy names such as raw umber or burnt sienna. The bright primaries such as blue or red are now mostly man-made. The two groups



Water-based powder dyes faded fast. After only five weeks, the extent of the sun damage, particularly to the red-dyed areas, is obvious.

More lightfast. Alcohol-based, non-grain-raising dyes suffered some damage from the sunlight but not as much as the water-based dyes.

120 FINE WOODWORKING

Photos: Mark Schofield

don't differ markedly in their lightfastness. New on the market are micronized pigments whose particles are so small that they mimic the transparency of a dye but offer the benefit of superior lightfastness. These "super" pigments are mostly confined to commercial systems and are very expensive, but they are finding their way into consumer exterior stains. Check the ingredients label for "transparent" red, yellow, or brown.

How to combine dye and pigment stains

When you open a can of Minwax Golden Oak, you'll notice that both the liquid in the top two-thirds of the can (the dye) and the thick sediment at the bottom (the pigment) are the same color. This dye and pigment stain combination, with its one-step ease of application, is common among mass-market stains. However, with prolonged exposure to bright light, the dye in the product will fade faster than the pigment, altering the original effect.

To offset this, select a separate NGR dye and a pigment stain of the same color. Apply the dye and let it dry. Then go over it with a thick pigment stain such as a gel stain that will act as a shield.

Further ways to protect the colors


Manufacturers of clear coatings use additives to slow down the degradation of a color. The best finishes for sun protection contain both ultraviolet absorbers (UVAs) and hindered amine light stabilizers (HALS). UVAs absorb the damaging rays and protect the underlying surface color, whether stained or natural; HALS protect the clear coat itself.

Because both types of additive are expensive, finish manufacturers use them sparingly unless the product is designed for a sun-exposed location and can command a premium. In general, marine finishes contain large amounts of UV protection, mass-market exterior finishes have smaller amounts, and most interior finishes contain little if any. The can probably will mention if the contents include UV inhibitors, but to be safe. contact the manufacturer.

Even in a good exterior finish, the additives eventually will break down from exposure to light.

USE A CLEAR COAT TO PROTECT THE COLOR

Clear finishes designed for exterior use should contain ingredients to block and/or absorb ultraviolet light.





The benefits of UV protection. Compared to the severe fading of the water-based dves with no clear topcoat (top), those sealed with three coats of an exterior finish containing ultraviolet absorbers showed only a slight change in color.

APPLY STAIN AND DYE SEPARATELY



Two-step process adds depth to a workpiece. The best way to combine dyes and stains is to apply the dye first (left), in this case an oil-based dye dissolved in mineral spirits, and to let it dry. Then wipe on a heavy pigment stain with a similar color (below). This will add depth to the look and will give the dye underneath some protection.







FLUSH SANDING



VERTICAL SANDING



SCRIBING



EDGE SANDING

THE BIG IDEA. SMALLER.




Now sanding in tight spaces or unusual orientations is easier than ever. Introducing the most compact belt sander you can buy, the PORTER-CABLE* 371K. It's the only 21/2 X14 belt sander available. Besides being compact, it has a flush side for sanding up to perpendicular surfaces. It also features a low center of gravity for balance, a rubber grip for comfort, and metal components for durability. Find out more about our small wonder at www.porter-cable.com/sanders.



100 YEARS OF INNOVATION

READER SERVICE NO. 159

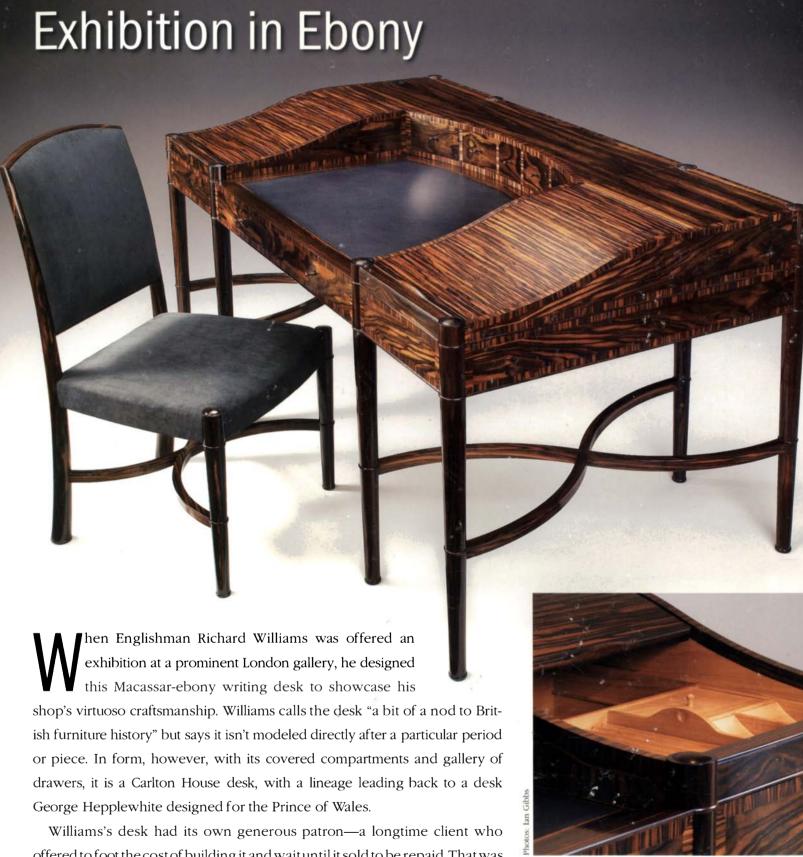

offered to foot the cost of building it and wait until it sold to be repaid. That was

fortunate, because the desk and chair required 930 hours to build. Williams, who employs five cabinetmakers and can spare

only a day a week at the workbench, built the chair but entrusted the desk to Stuart Webster. The trickiest technical issue was getting the tambours to slide without sticking or racing. A full-scale mock-up solved that riddle.