

NOTE:
OFFAL AND HIDE ROOMS MAY BE ON SAME
LEVEL OR LOWERED, DEPENDING ON TERRAIN.

NOTE:
CHECK ROOF REQUIREMENTS WITH STATE OR FEDERAL INSPECTOR.
IF ROOF IS REQUIRED, EXTEND 6'x6' POSTS AND ADD PLATE TO
SUPPORT TRUSS ROOF LEAVE RIDGE OPENING FOR VENT.

DESIGN CAPACITY = 10 HEAD PER DAY

FLOOR PLAN

12'0" 1'2'3'4"

NOTES:
THE PURPOSE OF THESE PLANS IS TO SERVE
AS A GUIDE ONLY.
FOR A PLANT TO BE ELIGIBLE FOR OFFICIAL
INSPECTION, DETAILED PLANS MUST BE
SUBMITTED TO YOUR LOCAL HEALTH &
BUILDING CODE AUTHORITIES, FOR APPROVAL
BEFORE CONSTRUCTION IS BEGUN.


COOPERATIVE EXTENSION WORK IN
AGRICULTURE AND HOME ECONOMICS

AND
UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING

CUSTOM SLAUGHTERHOUSE

VA 177 6270 SHEET 1 OF 4

BASED ON: VPI & SU PLAN NO. M-176

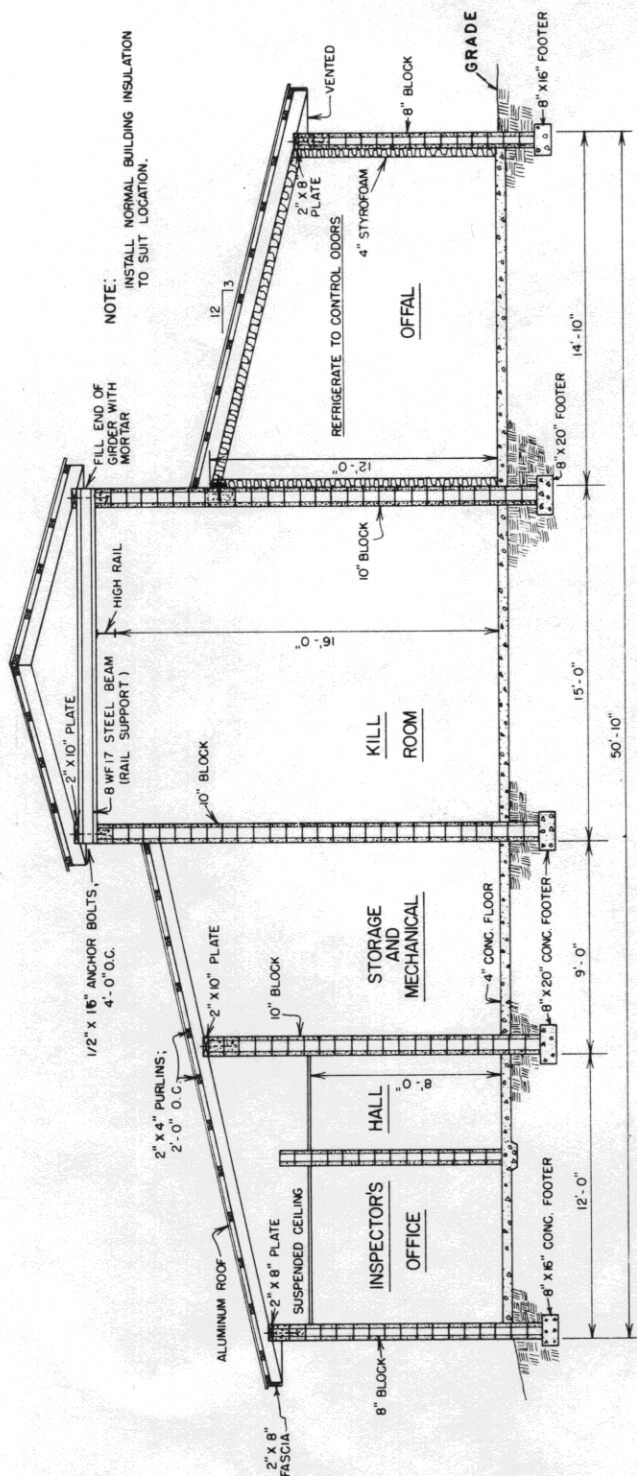


NOTE: INSTALL NORMAL BUILDING INSULATION TO SUIT LOCATION.

NOTE: HANGING RAILS NOT SHOWN






SECTION A-A

EXTEND FOOTINGS TO FIRM BASE BELOW FROST LINE

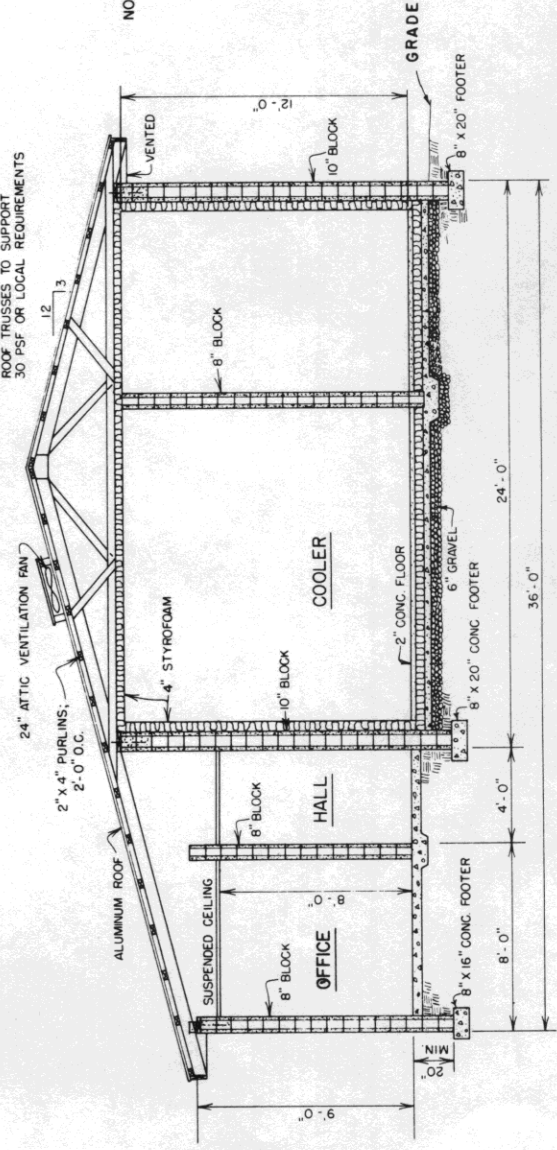

SECTION B-B





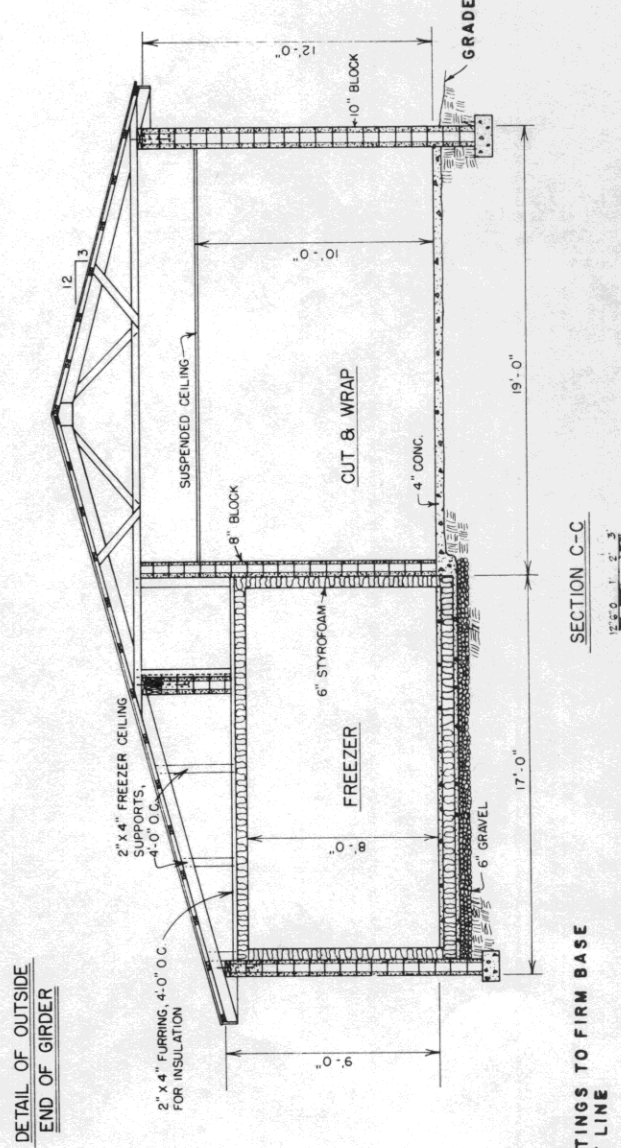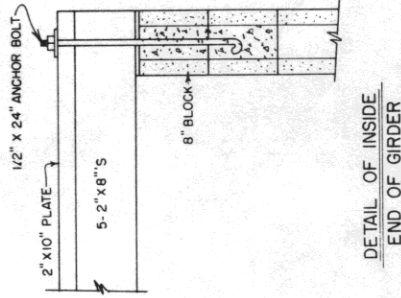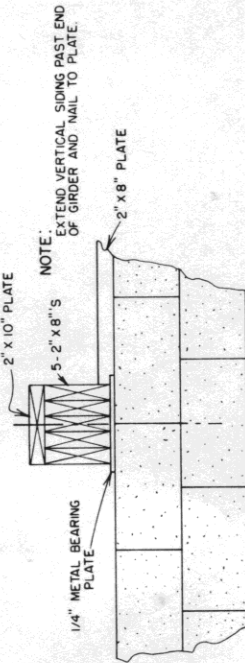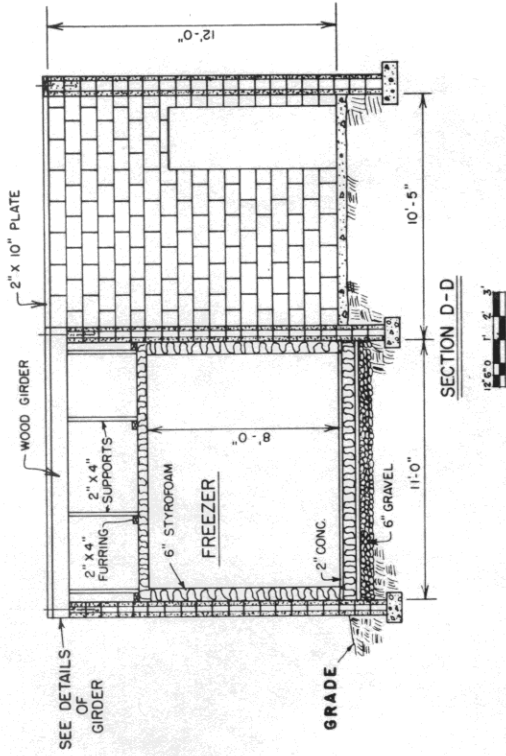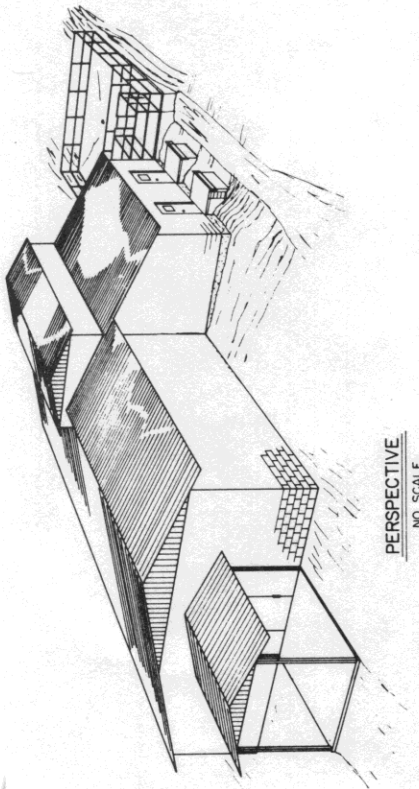

EXTEND FOOTINGS TO FIRM BASE BELOW FROST LINE

12" 9" 6" 3" 0


NOTE:
HANG LIGHTS FROM CABLES IF
HOLDING AREA IS OPEN

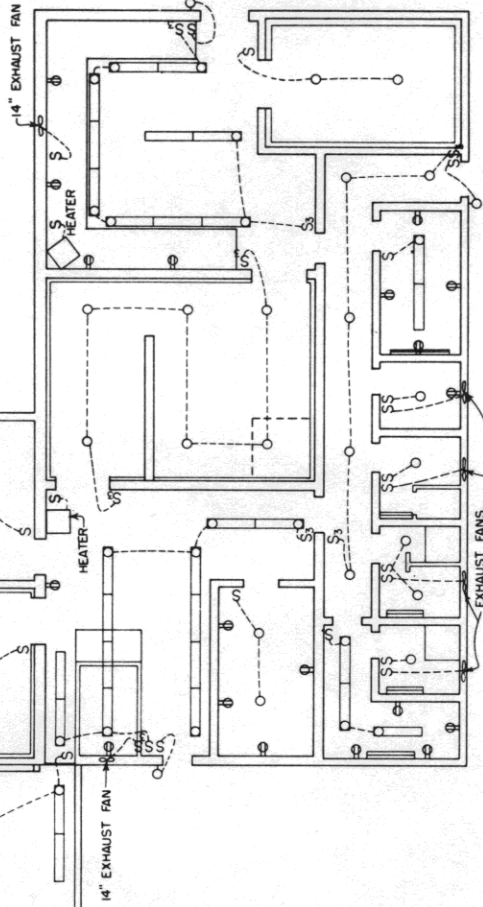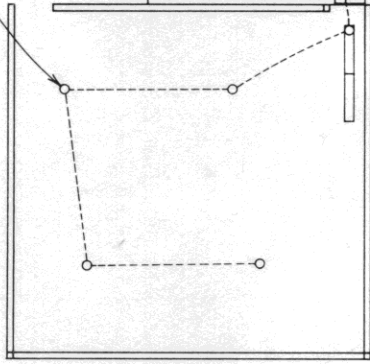

ELECTRICAL LAYOUT



ELECTRICAL SYMBOLS	
	CEILING OUTLET W/INCANDESCENT FIXTURE
	CEILING OUTLET W/FLOURESCENT FIXTURE
	FLOURESCENT FIXTURE IN CONTINUOUS ROW
	RECEPTACLE OUTLET, DUPLEX GROUNDING TYPE
	INDICATES SWITCH CONTROL
	LOCAL SWITCH, SINGLE POLE
	LOCAL SWITCH, 3 WAY
	ELECTRIC BASEBOARD HEATER

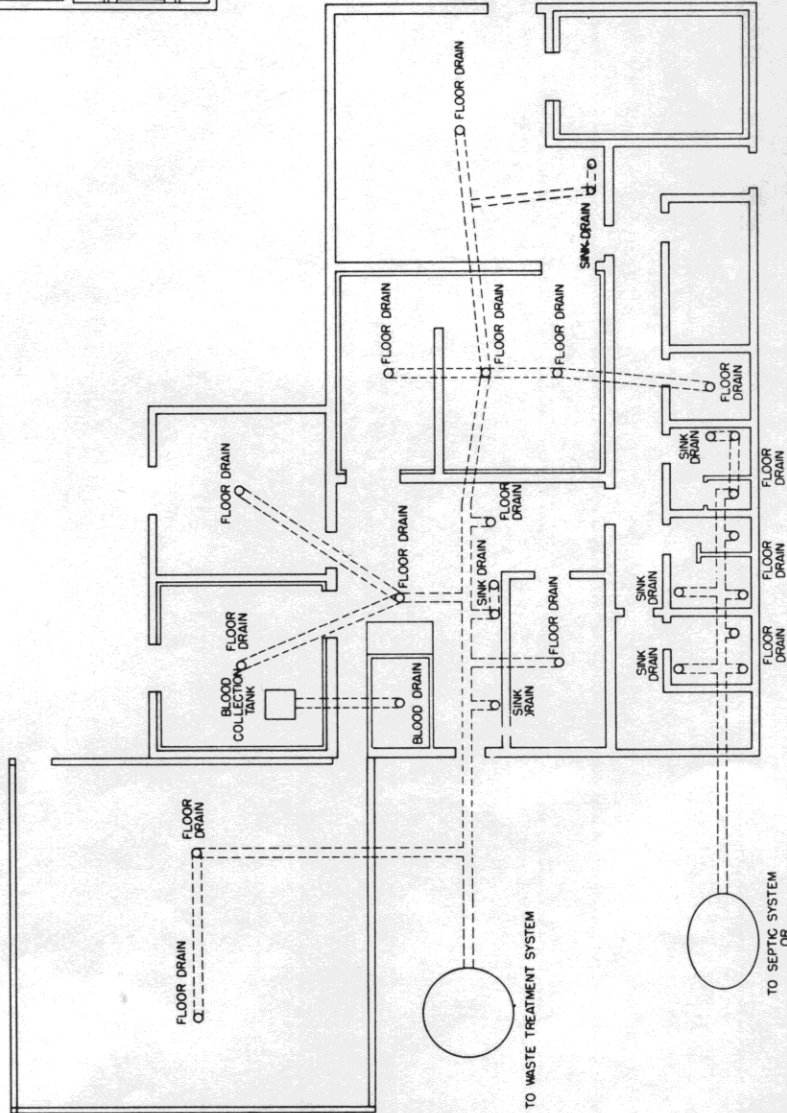

DRAIN SYSTEMS

NOTE:

ALL DRAINS TO BE EQUIPPED WITH
A DEEP SEAL TRAP & PROPERLY
VENTED USE RODENT SCREENS
WHERE NECESSARY.