


3/4" EXTERIOR PLYWOOD FLOORING


FRONT FRAMING
SCALE: 0 1 2 3 4 FT.

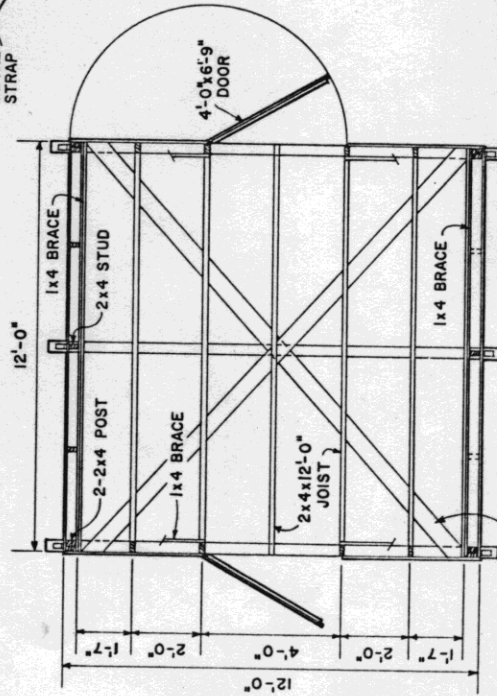

1x6x16'-3" X-BRACE NOTCH INTO TOP OF SKIDS

NOTES:

- 3/8" EXTERIOR PLYWOOD, ALUMINUM, OR GALVANIZED SHEET METAL MAY BE USED FOR SIDING.
- SKIDS, JOISTS, X-BRACING, BOTTOM PART OF POSTS AND STUDS TO BE TREATED WITH PRESERVATIVE SUCH AS CREOSOTE OR PENTACHLOROPHENOL.

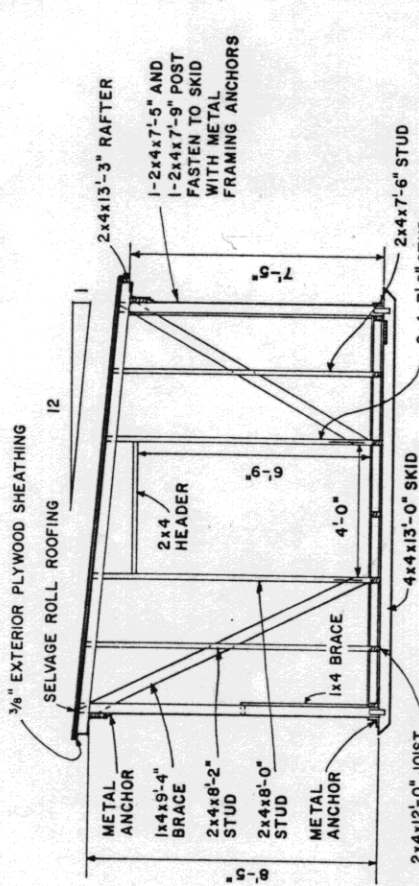

2x4x12'-0" JOIST, FASTEN TO SKID WITH FRAMING ANCHOR, METAL STRAPS OR 3/4" B BOLTS

