


# SEAT & BACK INSTALLATION

## FIGURE 4

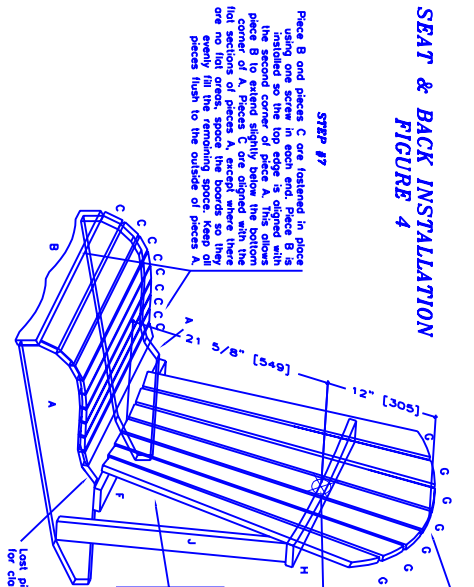

STEP #7

### Procedure 2) - See Figure 3

Start the chair assembly by attaching the legs, pieces D to the front of the bases pieces A as illustrated in Step #1. We suggest you only clamp them at first, so you can stand them up and verify all the dimensions of your seat. You can then tighten them. The backrest then install only one 1-1/4\"/>

The next step is to fasten the arm support as in Step #2. This should be flush of the top with D and in the centre horizontally. Install two 1-1/2\"/>

Piece J may now be installed as per Step #3. Just clamp this one as well at first. Now, as per Step #4, we can install the arm itself, with piece K. Now, as per Step #4, we can install the arm itself, with piece K. Now, as per Step #4, we can install the arm itself, with piece K. Now, as per Step #4, we can install the arm itself, with piece K.

Step #5 now allows us to fasten down piece H to the tops of pieces J. These should be flush on the outside edges. Use two 1-1/2\"/>

Procedure 3) - See Figure 4

We now start on the seat with pieces B & C. Piece B is first installed keeping the top edge of B even with the first corner on each piece A. This will cause B to extend slightly below the bottom record corner of piece A. This will cause B to extend slightly below the bottom record corner of piece A.

The boards for the back, pieces G are the final step in assembly. Fasten the first board in the centre of piece F. Flush at the bottom, with one 1-1/2\"/>

The arc of the top of the back is now cut using a scroll saw or coping saw. Measure up 21-5/8\"/>

STEP #8

All pieces G are fastened in place to pieces F & H using one screw in each location. Start with the center board, keeping it flush at the bottom with piece F, and the other boards flush with the top of piece H. The remaining piece is installed using a 1/4\"/>

STEP #9

The top arc is a 12\"/>



STEP #4


Secure arm piece K to pieces D, E & J as illustrated using 1-1/2\"/>

STEP #2

Secure brace piece E to leg piece D with two 1-1/2\"/>


STEP #1

Clamp legs A & D together as illustrated. Be sure to maintain the horizontal and vertical dimensions as shown. Tighten the clamps and insert four 1-1/4\"/>

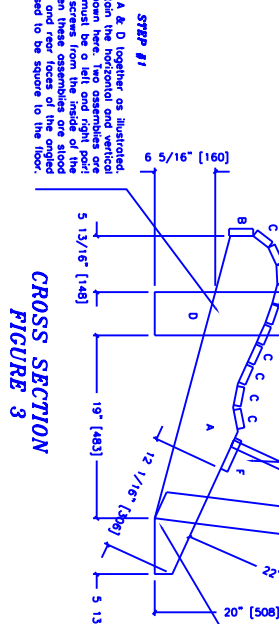

CROSS SECTION FIGURE 3

# ADIRONDACK CHAIR EXPLODED VIEW

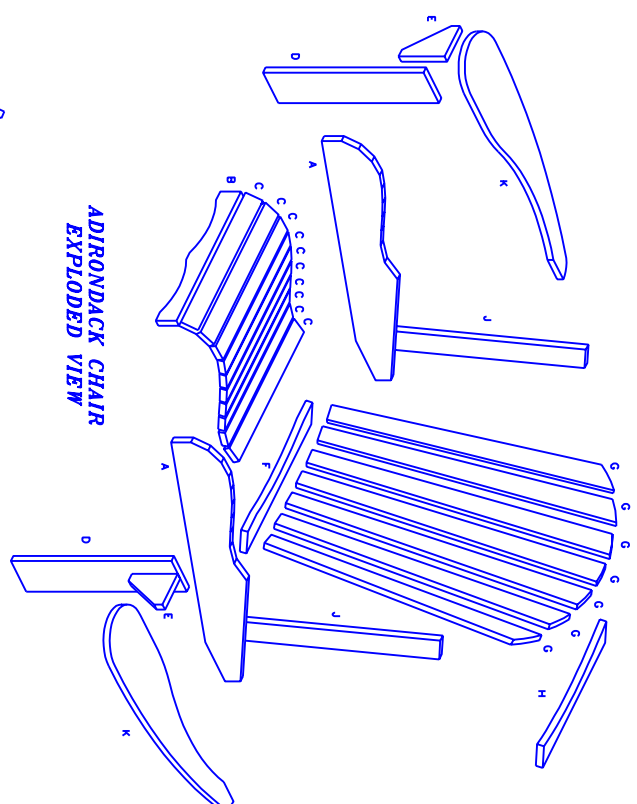

STEP #6


Secure piece H to the tops of pieces J with two 1-1/2\"/>

STEP #5

Clamp brace piece J to the inside of pieces A with two 1-1/2\"/>

STEP #3

Secure piece J to the tops of pieces A with two 1-1/2\"/>

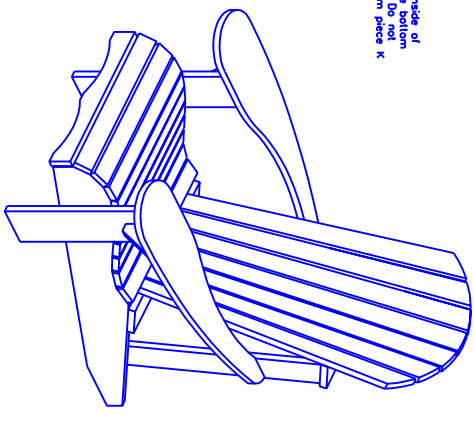

# ADIRONDACK CHAIR COMPLETED PROJECT