


LONGITUDINAL SECTION

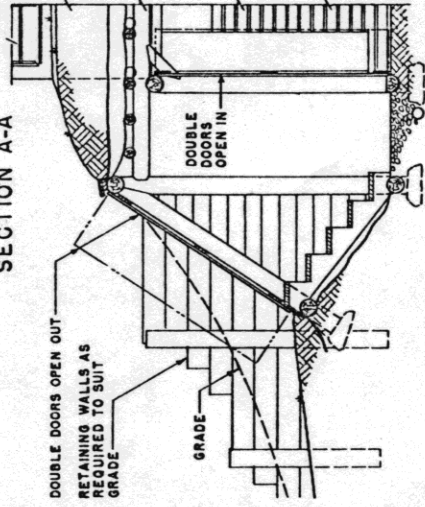

SECTION A-A

ALTERNATE ENTRANCE

TO BE USED WHERE STORAGE CANNOT BE CONNECTED TO BASEMENT OF HOUSE AND IS BUILT EITHER IN A BANK OR PARTIALLY UNDERGROUND AND COVERED WITH EARTH. ENTRANCE SHOULD PREFERABLY FACE NORTH.


IN AREAS WHERE THERE ARE TERmites OR DRIP PESTS, ALL MEMBERS SHOULD BE PRE-TREATED WITH PRESERVATIVE OR CONCRETE CONSTRUCTION AS SHOWN ON PLAN NO. 5330 SHOULD BE USED.

THIS CELLAR IS SUITABLE FOR USE AS A STORM CELLAR WHEN PLACED IN A DRY LOCATION AND PROVIDED WITH DRAINS AND EMERGENCY ESCAPE PANELS OR DOORS AS SHOWN.

DURING ERECTION STRUCTURE SHOULD BE TEMPORARILY REINFORCED WITH HEAVY DIAGONAL BRACES, AND FILL APPLIED EVENLY AROUND WALLS. LOUVERS TO BE SCREENED ON INSIDE WITH 16 MESH INSECT SCREEN.

HEAVY WIRES OF 2x4x11 GA. GALV. WIRE FENCING SHALL BE RUN LONGITUDINALLY ON SIDES AND ROOF. ROOF BEAMS TO BE ANCHORED TO POSTS WITH GALV. STEEL U-STRAPS 18 GA. 1/4\"/>

BETWEEN RAFTERS AND SPREADERS, BE AT LEAST 4\"/>

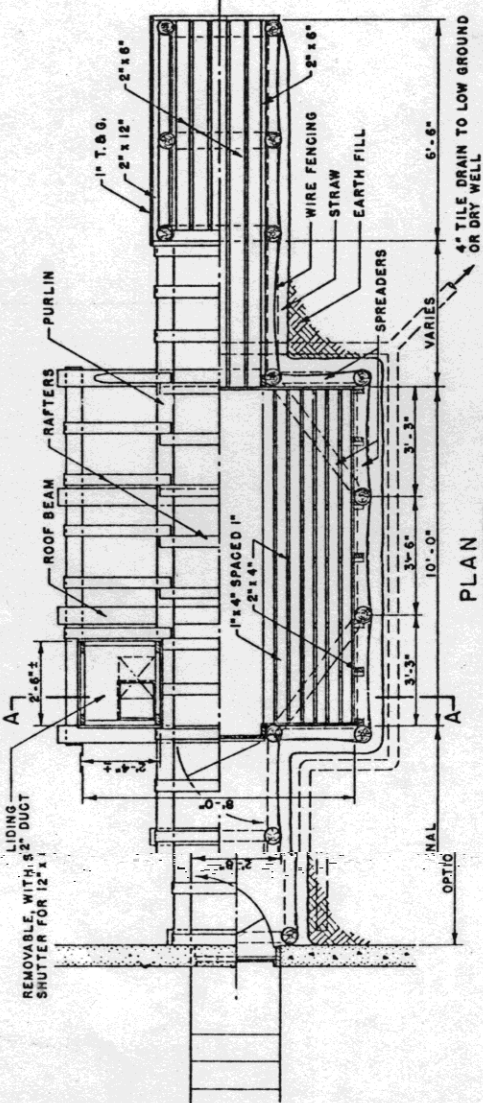

PLAN

