



- 3) Cut notches in pieces N as shown (Fig 5) with a finishing saw or hacksaw. Glue ends of pieces M and insert into the holes in piece C (Fig 6). Pre-drill through the notches in N and into M, using a 1/16" bit, glue and nail N to M with 1" finishing nails.
- 4) Glue and nail the perimeter pieces J and K to the assembly with 1" finishing nails. Glue the vinyl shelf edging along the edges of shelf D (Fig 7) with silicone or panel adhesive. Insert D into the unit and glue and nail on pieces L with 1" finishing nails. The rear piece L will keep the shelf from coming out.
- 5) Set nails and fill. Sand the unit and paint with interior enamel point.

**On materials:**


We have called for plywood for this project, as it is inexpensive and most furniture of this design is made from it.




**SUPPORTS ASSEMBLY**  
**FIGURE 5**

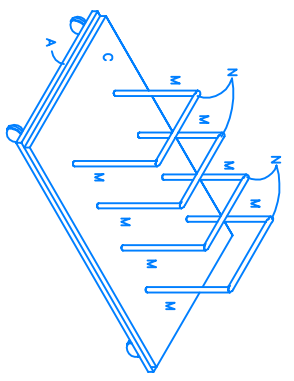


**RECORD SUPPORTS**  
**FIGURE 6**

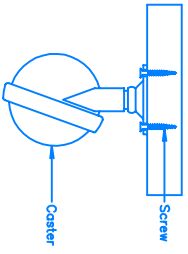


**CASTER MOUNTING DETAIL**




**SHELF SUPPORTS**  
**FIGURE 7**

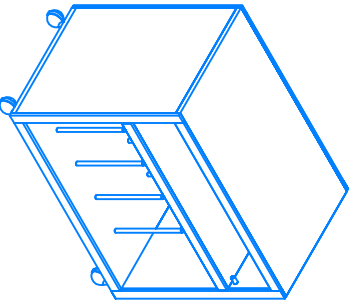

**STEREO STAND FINISHED PROJECT**

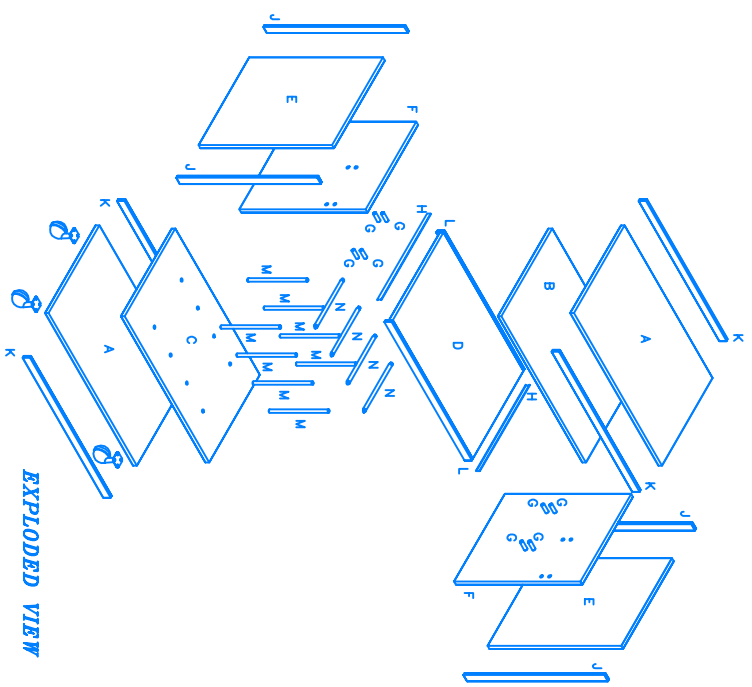

**EXPLODED VIEW**

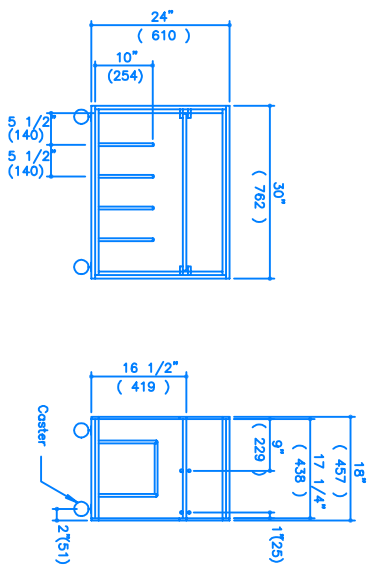

**CROSS SECTIONS**  
**FIGURE 8**