


**FLOOR PLAN**


1/2" = 1'-0"  
 1/4" = 3'-0"

1800 SQ. FT. UNFATTEN AREA

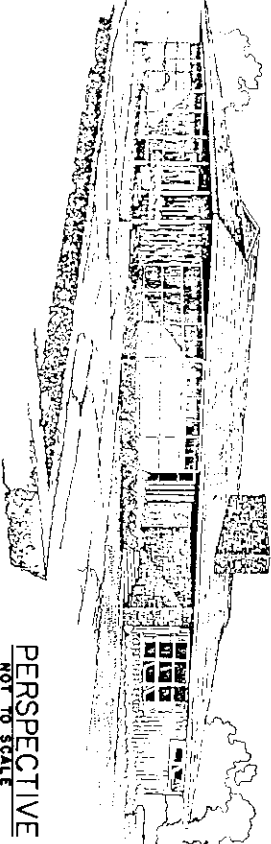


**PERSPECTIVE**  
 NOT TO SCALE


COOPERATIVE EXTENSION SERVICE AGRICULTURE AND HOME ECONOMICS			
UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING			
AND			
3 BEDROOM FARMHOUSE			
USDA 54	7127	SHEET 1 OF 4	
REV. 86			

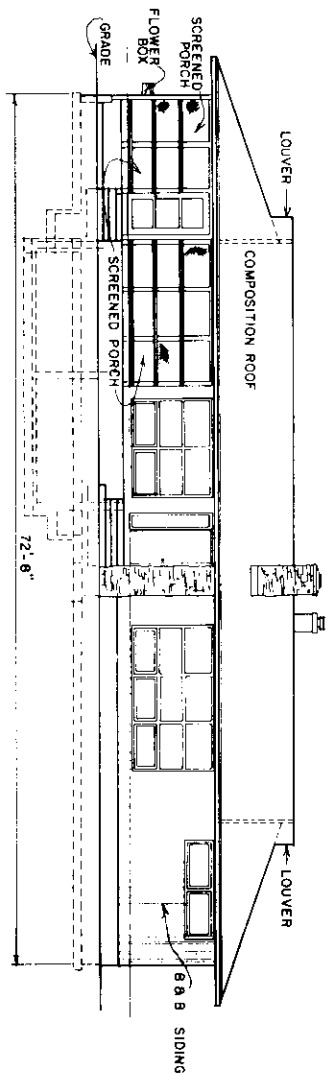


FRONT ELEVATION

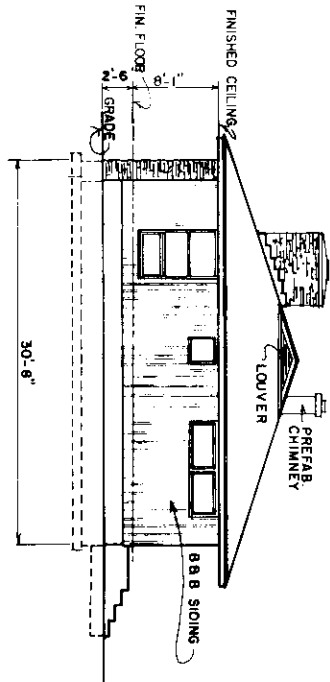

RIGHT ELEVATION

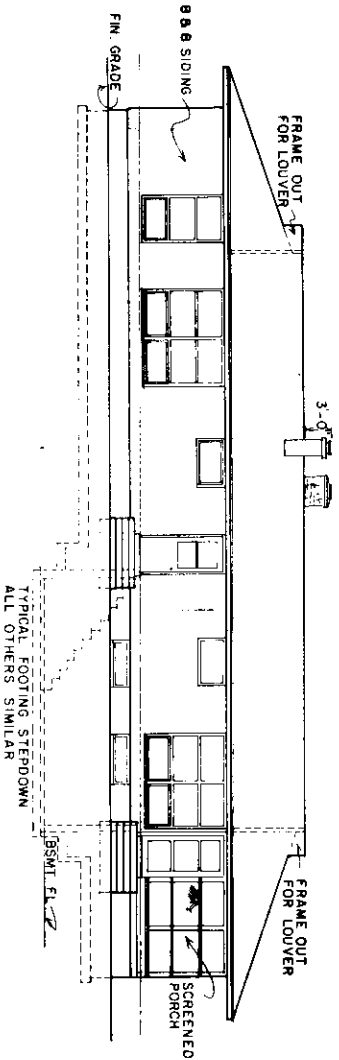

REAR ELEVATION

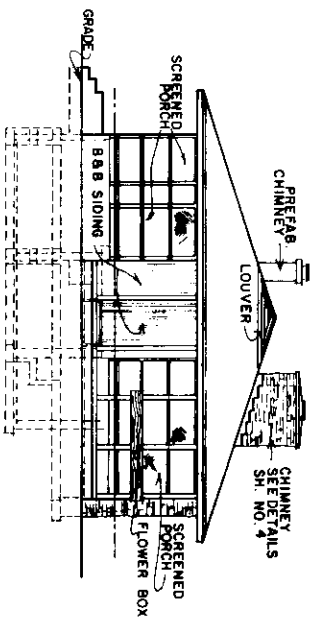

LEFT ELEVATION

W I N D O W S C H E D U L E		
MARK	SIZE	DESCRIPTION
A	4'-0" x 6'-9"	3 LIGHT-ZUPPER LIGHTS
R	4'-0" x 2'-4"	FIXED, BOTTOM OPERATING SINGLE OPERATING SASH
C	2'-0" x 2'-4"	SINGLE OPERATING SASH
D	4'-0" x 2'-4"	SINGLE FIXED LIGHT
E	4'-0" x 4'-0"	DOUBLE CASEMENT BASEMENT SASH
F	4'-0" x 1'-4"	BASEMENT SASH

D O O R S C H E D U L E		
MARK	SIZE	DESCRIPTION
1	3'-0" x 6'-8"	FLUSH EXTERIOR
2	2'-0" x 6'-8"	2 PANEL SCREENED
3	2'-0" x 6'-8"	FLUSH EXTERIOR (GLAZED) PANEL
4	2'-6" x 6'-8"	2 PANEL SCREENED
5	2'-6" x 6'-8"	SCREENED INTERIOR
6	2'-6" x 6'-8"	FLUSH INTERIOR
7	2'-3" x 6'-8"	FLUSH INTERIOR
8	2'-5" x 6'-8"	FLUSH INTERIOR
9	4'-0" x 6'-8"	8'-EQ. 2 - 4 PANEL
10	1'-9" x 6'-8"	8'-EQ. 2
11	1'-8" x 6'-8"	FLUSH INTERIOR

ELEVATIONS



CONSTRUCTION CHECK LIST

- CHECK LOCAL BUILDING CODE AND LOAN COMPANY CRITERIA. PURCHASE TRUSSES TO MEET 20 LB/SQ. FT. SNOW LOAD CRITERIA. RAFTERS MEET 20 LB/SQ. FT. SNOW LOAD CRITERIA.
- ADEQUATELY NAIL AND ANCHOR JOINTS.
- SEATH CORNERS WITH 1/2" PLYWOOD OR HIGH DENSITY FIBERBOARD OR USE DIAGONAL BRACING.
- USE EXTERIOR GRADED PLYWOOD WHEREVER IT MAY BE LITTED DURING OR AFTER CONSTRUCTION.
- PRESSURE TREAT ALL WOOD WITH GROUND CONTACT AND PROVIDE OTHER NEEDED TREATMENT CONTROL.
- R VALUES DEPEND ON LOCAL CLIMATE AND FUEL COSTS.
- PROVIDE 1 SQ. FT. OF ATTIC VENT OPENINGS FOR EACH 150 SQ. FT. OF CEILING.
- WEATHERIZE ALL OPENINGS AND JOINTS.
- DOUBLE JOISTS UNDER TRIMS AND OTHER HEAVY LOADS.

COOPERATIVE EXTENSION SERVICE  
AGRICULTURE AND HOME ECONOMICS


UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING  
AND

3 BEDROOM FARMHOUSE

USDA '54 7127


SHEET 2 OF 4

REV '86

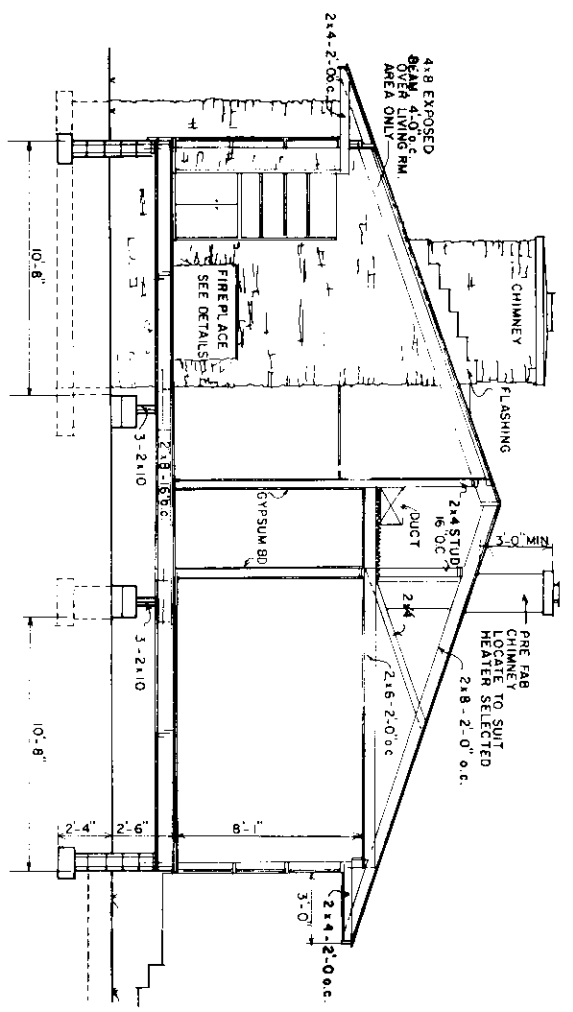


SECTION


NOTE:  
ADJUST FOUNDATION HEIGHT  
TO MATCH PORCH AND GARPORT  
FLOORS.

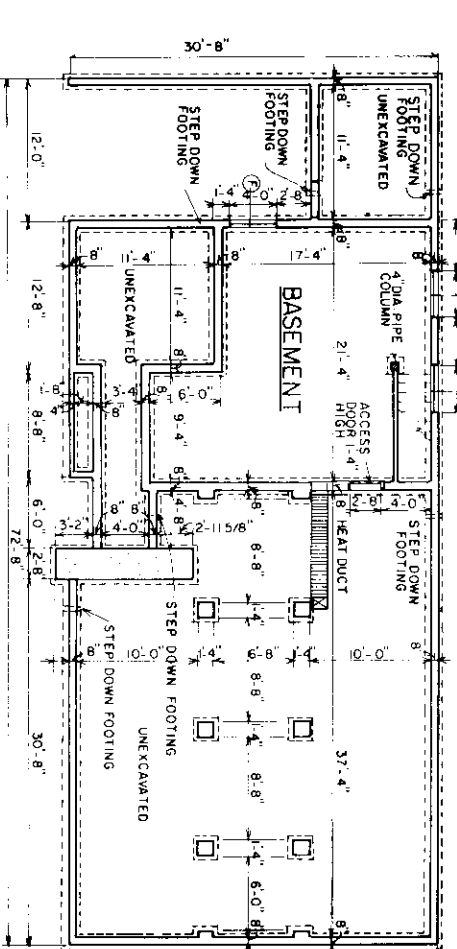

FOUNDATION AND BASEMENT PLAN

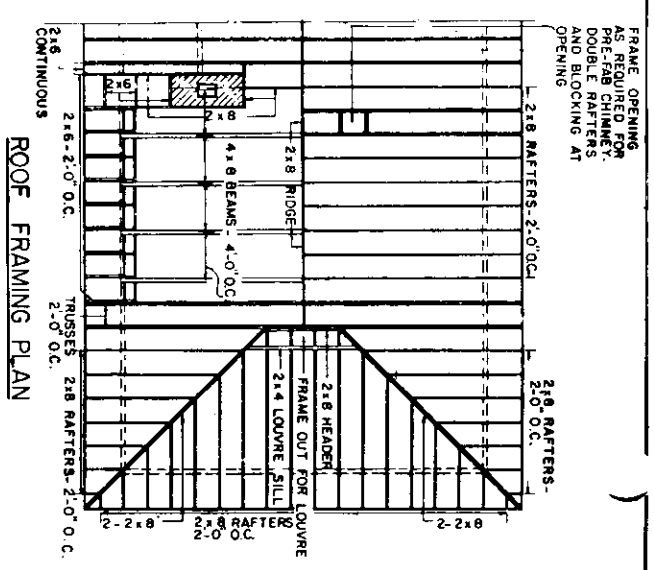


ROOF FRAMING PLAN

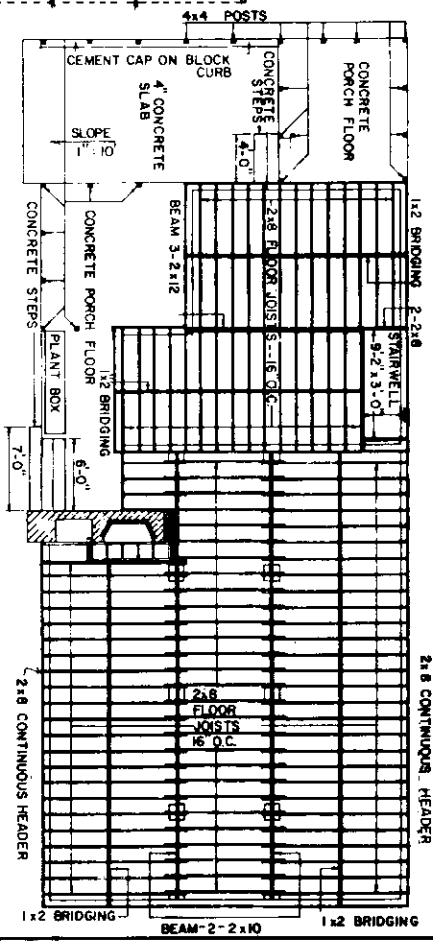

FOR FRAMING AROUND HEARTH  
SEE FIREPLACE DETAILS

COOPERATIVE EXTENSION SERVICE  
AGRICULTURE AND HOME ECONOMICS  
UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING  
AND  
3 BEDROOM FARMHOUSE  
USDA '54 7127 SHEET 3 OF 4  
REV '86

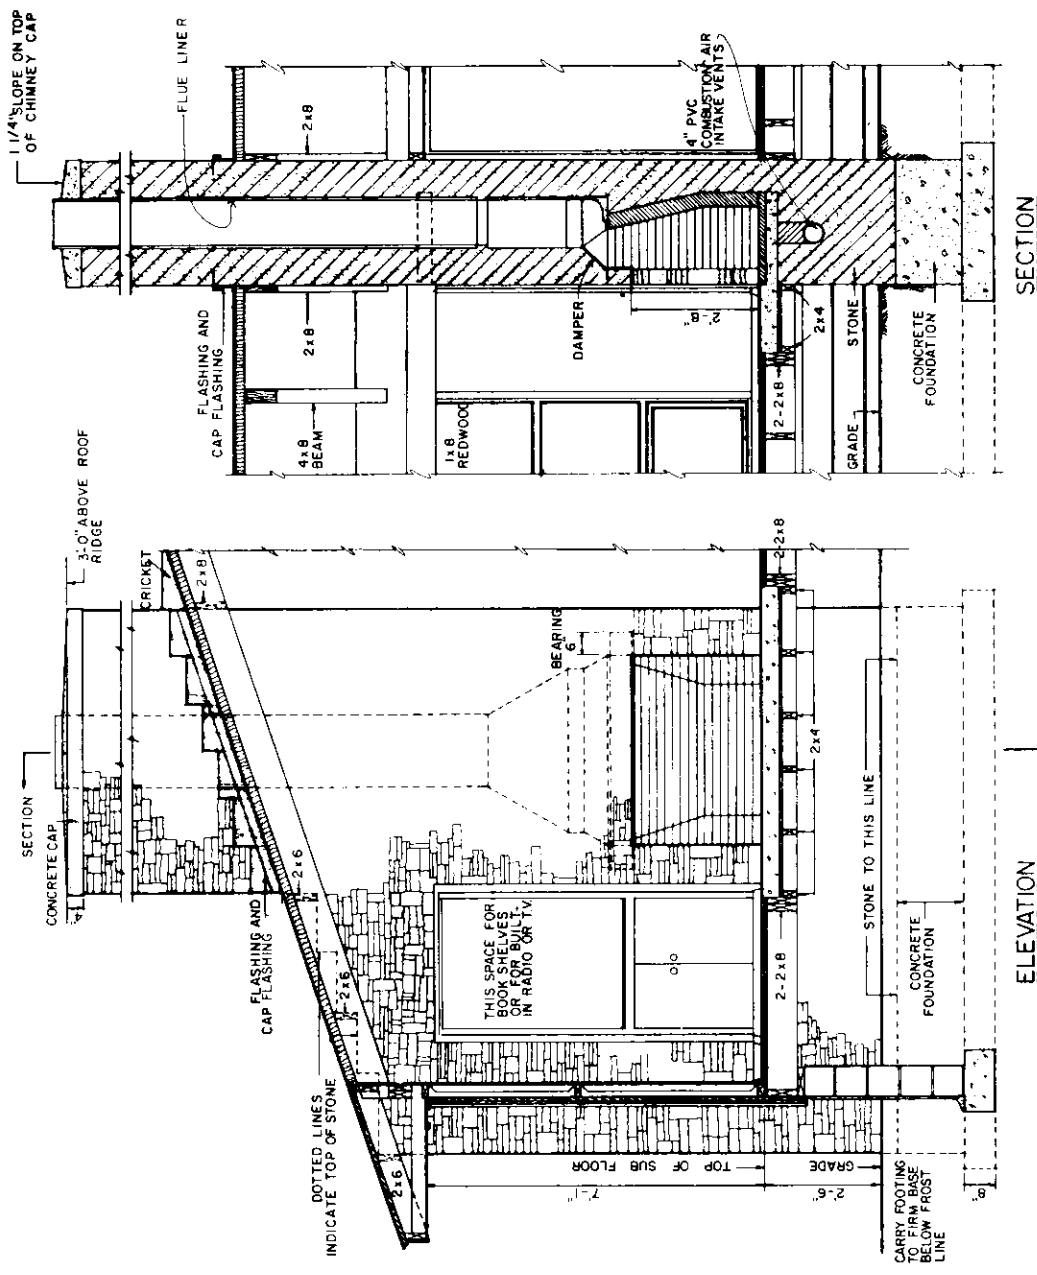

1 1/4" SLOPE ON TOP OF CHIMNEY CAP

23 5/8" ASPHALT SHINGLES OVER 15 LB BUILDING FELT AND 1/2 PLY SHEATHING

2-2x4 PLATE  
1x6 FASCIA  
3/8" EXT PLYWOOD SOFFIT WITH 2 CONT. VENT

2x4 STUDS - 16" O.C.

R-11 INSULATION AND V.B.  
WOOD SIDING OVER 1/2" PLYWOOD FELT SHEATHING

2x4 SILL PLATE  
CONT. 2x6-2x4 CONT. OVER WINDOWS ONLY  
CONT. 2x8 PLATE OVER WINDOWS ONLY  
3/4" BLOCKING


FINISH-FLOORING SUB-FLOORING  
8x8x16 CONC. BLOCK

BASEMENT FLOOR CONCRETE REINFORCED W/ #6 10GA W. MESH OVER V.B. AND 4" MIN. GRAVEL FILL

CEMENT PLASTER WATER PROOFING  
CARRY FOOTING TO FIRM BASE BELOW FROSTLINE

WALL SECTION  
1 1/2" 6" 3" 0

DETAILS OF FIREPLACE

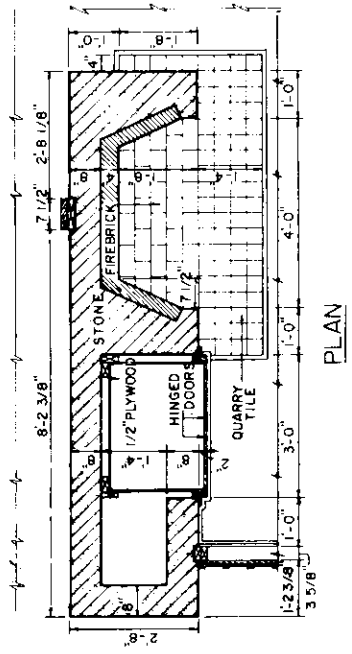

ELEVATION

PLAN

COOPERATIVE EXTENSION SERVICE AGRICULTURE AND HOME ECONOMICS			
AND UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING			
3 BEDROOM FARMHOUSE		SHEET 4 OF 4	
USDA 54	7127	REV. '86	